BENEITO FAURE®

TECHNICAL ARCHITECTURE


BENEITO FAURE®

BENEITO FAURE®



At Beneito Faure, we are opening our new offices,
a space designed to keep growing and offering
the very best to our clients.

En Beneito Faure estrenamos nuevas oficinas,
un espacio diseñado para seguir creciendo y
ofreciendo lo mejor a nuestros clientes.





Projects

Our project department offers a wide range of services focused on providing lighting solutions that are not only aesthetically appealing, but also improve people's quality of life and comply with current regulations.
Below we describe the key services that our project department can offer:

- Custom lighting design: Our team of highly skilled lighting designers works closely with costumers to create lighting solutions tailored to their specific needs. We strive to understand the unique characteristics of each project and design lighting systems that enhance the aesthetics, functionality, and comfort of the space.
- Human-centered lighting: We recognize the importance of lighting on people's health and well-being. Our designs take into account factors such as circadian cycle, visual fatigue and ergonomics to ensure that lighting contributes positively to the environment and people's performance.
- Energy efficiency: We are introducing practices and products that increasingly fit within the parameters of sustainability. We believe in creating and distributing LED products that fit within a circular economy in order to minimize waste and have a more sustainable and durable planet, always adding value to each lighting project. We are committed to designing lighting systems that are highly energy efficient. This not only reduces operating costs, but also contributes to environmental sustainability. Our designs incorporate cutting-edge LED lighting technologies and intelligent control systems.
- Regulations: Our team is highly trained in current regulations and standards in the field of lighting. We ensure that all our designs comply with local and national standards, guaranteeing the safety and legal compliance of each project.
- Technical advice in the choice of products and during product installation.

Our project department offers solutions that improve people's quality of life, comply with regulations and stand out for their innovative design. If you are looking for a reliable partner for your next lighting project, do not hesitate to contact us. We are ready to bring your lighting ideas and needs to life.
If you are looking for a reliable partner for your next lighting project, feel free to contact us. We are ready to bring your ideas and lighting needs to life.
On the right is one of our latest interior lighting projects, CONNECTA FISIOTERÀPIA I SALUT.

Nuestro departamento de proyectos ofrece una amplia gama de servicios enfocados en proporcionar soluciones de iluminación que no solo sean estéticamente atractivas, sino que también mejoren la calidad de vida de las personas y cumplan con las regulaciones vigentes.
A continuación, describiremos los servicios clave que nuestro departamento de proyectos puede ofrecer:

- Diseño de iluminación personalizado: Nuestro equipo de diseñadores de iluminación altamente capacitado trabaja en estrecha colaboración con los clientes para crear soluciones de iluminación adaptadas a sus necesidades específicas. Nos esforzamos por comprender las características únicas de cada proyecto y diseñar sistemas de iluminación que realcen la estética, la funcionalidad y la comodidad del espacio.
- Iluminación centrada en el ser humano: Reconocemos la importancia de la iluminación en la salud y el bienestar de las personas. Nuestros diseños tienen en cuenta factores como el ciclo circadiano, la fatiga visual y la ergonomía para garantizar que la iluminación contribuya positivamente al entorno y al rendimiento de las personas.
- Eficiencia energética: Estamos introduciendo prácticas y productos que se ajustan, cada vez más, dentro de los parámetros de la sostenibilidad. Creemos en la creación y distribución de productos LED que encajen dentro de una economía circular para poder minimizar los residuos y tener un planeta más sostenible y duradero, siempre añadiendo valor a cada proyecto de iluminación. Nos comprometemos a diseñar sistemas de iluminación que sean altamente eficientes desde el punto de vista energético. Esto no solo reduce los costos operativos, sino que también contribuye a la sostenibilidad ambiental. Nuestros diseños incorporan tecnologías de iluminación LED de vanguardia y sistemas de control inteligente.
- Normativa: Nuestro equipo está altamente capacitado en las regulaciones y normativas vigentes en el campo de la iluminación. Nos aseguramos de que todos nuestros diseños cumplan con los estándares locales y nacionales, garantizando así la seguridad y el cumplimiento legal de cada proyecto.
- Asesoramiento técnico en la elección de los productos y durante la instalación de los mismos.

Nuestro departamento de proyectos ofrece soluciones que mejoran la calidad de vida de las personas, cumplen con las normativas y destacan por su diseño innovador. Si está buscando un socio de confianza para su próximo proyecto de iluminación, no dude en ponerse en contacto con nosotros. Estamos listos para dar vida a sus ideas y necesidades de iluminación.
A la derecha se muestra uno de nuestros últimos proyectos de iluminación interior, CONNECTA FISIOTERÀPIA I SALUT.

Render



Lighting calculation











BENEITO FAURE®

Discover our selection of exhibitors designed by Beneito Faure to present and explain our products to our customers in a simple and interactive way, being able to appreciate the materials, the different applications and their lighting effects.
Each exhibitor is designed to communicate in the most effective way the characteristics and benefits of our products.
Contact our sales department to order your exhibitor.

Led strip book



(37x3,5x23,5cm)

Led strip briefcase



(42x15x35cm)

Led strips and profiles
1st display



(64x40x174cm) / (64x40x213cm) with 2m profiles

Led strips and profiles
2nd display



(197x45x197cm)

Sampling & Display Stand

Descubre nuestra selección de expositores diseñados por Beneito Faure para ayudar a nuestros clientes a dar a conocer y explicar nuestros productos de una forma sencilla e interactiva, pudiendo apreciar los materiales, las diferentes aplicaciones y los efectos lumínicos de los mismos.
Cada expositor está pensado para comunicar de la manera más eficaz las características y beneficios de nuestros productos.
Ponte en contacto con nuestro departamento comercial para pedir tu expositor.

Touch panel display



(110x38x200cm)

Magnet track mini display



(71,5x18x46cm)

HUMAN CENTRIC LIGHTING

One CCT foreach activity
Un CCT en cada actividad de tu dia

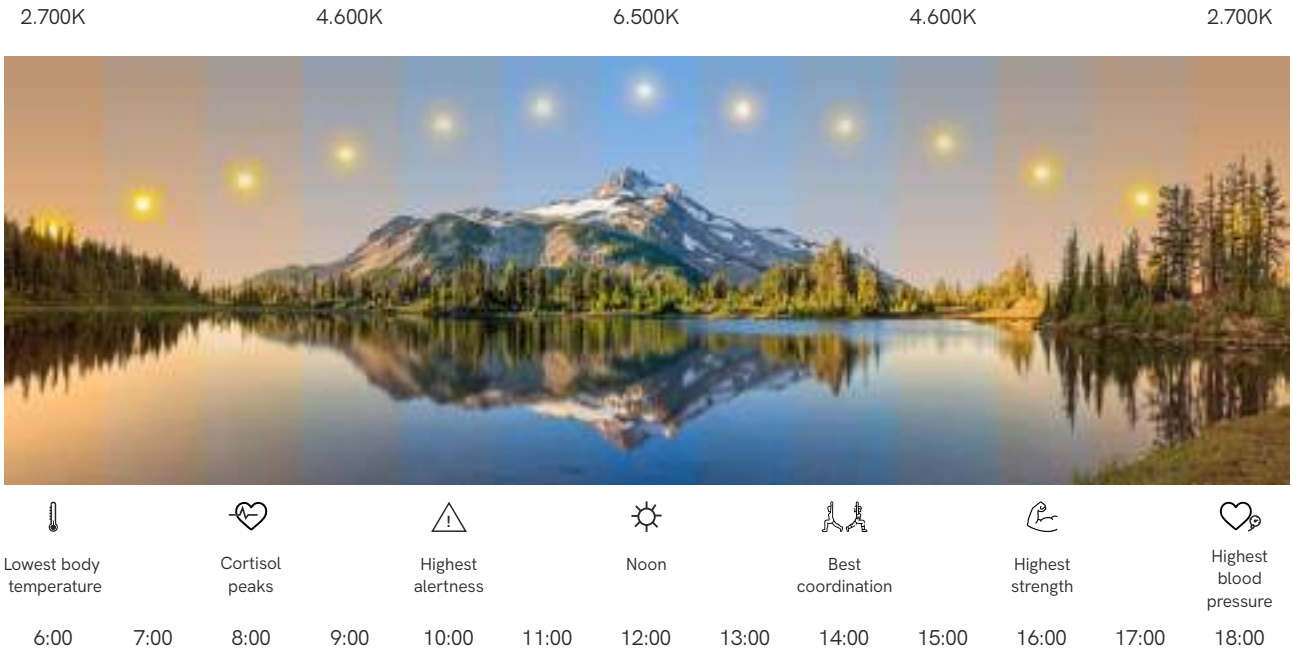

CCT is the color appearance that a light source emits compared to a CIE standard. It is measured in degrees Kelvin (K). The warmest lights have the lowest values and the coldest ones the highest. Our CCTs range from 2200K to 6000K.
You can create and modify lighting scenes, change light intensity, and choose from a great variety of CCTs. With CASAMBI control, for example, you can create lighting based on the circadian circle.

El **CCT** es el aspecto cromático que emite una fuente de luz en comparación con un estándar CIE. Se mide en grados Kelvin (K). Las luces más cálidas tienen los valores más bajos y las más frías los más altos. Nuestros CCT van de 2.200K a 6.000K.
Puede crear y modificar escenas de iluminación, cambiar la intensidad de la luz y elegir entre una gran variedad de CCT. Con el control CASAMBI, por ejemplo, puede crear una iluminación basada en el círculo circadiano.

Light quality
Calidad de la luz

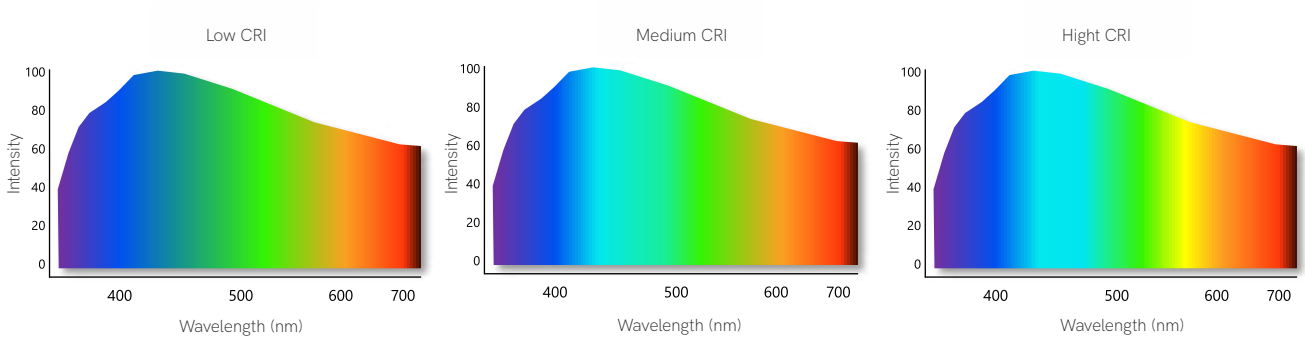

CRI or the Color Rendering Index is a measurement that evaluates how faithfully a light source displays colors compared to natural light. It is classified from 0 to 100; 100 value is highest accurate representation of colors, while lower values may distort the appearance of colors. Our products CRI range from 80 to 98.

El **CRI** o Índice de Reproducción Cromática es una medida que evalúa la fidelidad con la que una fuente de luz muestra los colores en comparación con la luz natural. Se clasifica de 0 a 100; el valor 100 es la representación más precisa de los colores, mientras que los valores inferiores pueden distorsionar la apariencia de los colores. El CRI de nuestros productos oscila entre 80 y 98.



Photobiological risk are all photobiological hazards that can affect the skin and eyes. From ultraviolet to infrared wavelengths. A RG0 is the lowest risk and RG4 is the highest risk. All our products are the lowest risk, RG0 or RG1.

Son todos los **riesgos fotobiológicos** que pueden afectar a la piel y los ojos. Desde las longitudes de onda ultravioleta hasta las infrarrojas. Un RG0 es el riesgo más bajo y un RG4 es el riesgo más alto. Todos nuestros productos tienen el riesgo más bajo, RG0 o RG1.



UGR or united glare rating is a measurement that helps us understand how much annoying glare can affect our vision. When the brightness is very strong it makes you squint or makes it difficult for you to see well. The higher the index, the more annoying the brightness can be for our eyes. You can check which products have a UGR less o equal than 19 as requested by the regulations for workspaces.

El **UGR** o índice de deslumbramiento unido es una medida que nos ayuda a comprender hasta qué punto el molesto deslumbramiento puede afectar a nuestra visión. Cuando la luminosidad es muy intensa, nos hace entrecerrar los ojos o nos dificulta ver bien. Cuanto mayor sea el índice, más molesto puede ser el brillo para nuestros ojos. Puede comprobar qué productos tienen un UGR inferior o igual a 19, tal y como exige la normativa para espacios de trabajo.

Symbology

Installation.
Instalación.



Casambi protocol.
Protocolo Casambi.



Tuya protocol.
Protocolo Tuya.



Need Tuya Smart App to work.
Necesita aplicación Tuya Smart para funcionar.



Dali / Dali 2 protocol.
Protocolo Dali / Dali 2.



Lumen Maintenance.
Mantenimiento de lúmenes.



Push.
Pulsador.



Emergency kit in luminaire.
Kit de emergencia en luminaria.



TRIAC Dimmable.
Regulable por TRIAC.



Radio frequency.
Radio frecuencia.



Made to measure strip LED cutting.
Corte de tiras LED a medida.



3 light intensities.
3 intensidades luminosas.



Saline-alkali resistance.
Resistencia a los álcalis salinos.



Customized cutting and handling.
Corte y manipulación personalizado.



Corrosion resisting.
Resistencia a la corrosión.



Anti-UV.
Anti-UV.



Customizable color.
Color personalizable.

AL
6060

Type of aluminium.
Tipo de aluminio.



Supported weight.
Peso soportado.

UGR
<19

Glare rating.
Indice de deslumbramiento.



Color temperature selector.
Selector de temperatura de color.



Power selector.
Selector de potencia.



Color rendering index.
Índice de reproducción cromática.

20
IP

Water and dust protection.
Resistencia al agua y al polvo.



Beam Angle.
Ángulo de apertura.

Light 360°.
Luz 360°.

>0,9
PF

Power Factor.
Factor de Potencia.

220/230
VAC

Voltage.
Tensión de entrada.



Surface luminaire not suitable for mounting on flammable surfaces.
Luminaria de superficie no adecuada para montaje en superficies inflamables.



Recessed luminaire not suitable for mounting on flammable surfaces.
Luminaria empotrada no adecuada para montaje en superficies inflamables.



Do not cover.
No cubrir.

5
YEARS
WARRANTY

Warranty.
Años de garantía.

30.000
HOURS

Lifetime.
Horas de vida.

50/60
Hz

Hertz.
Hercios.



Class II.
Clase II.

CABLE
24CM

Cable length.
Longitud del cable.



Surge protection.
Protección contra sobretensiones.



Impact resistance.
Resistencia a los impactos.



Touch control.
Control táctil.



Battery autonomy.
Autonomía de la batería.



Charging time with electricity.
Tiempo de carga con corriente.



Motion sensor.
Detector de movimiento.



Distance sensor.
Distancia de detección.



Suitable for closed luminaires.
Apta para luminarias cerradas.



Units per box (min-max).
Unidades por caja.



Electronic waste.
Residuos electrónicos.



Replace cracked protection shield.
Sustituir pantalla de protección con fisuras.



Class I.
Clase I.



Class III.
Clase III.



Supported weight.
Peso soportado.



Operating Temperature.
Temperatura de trabajo.



Ground slope.
Inclinación del suelo.

AKZO
NOBEL

Anti corrosive marine paint.
Pintura anticorrosión marina.



Wireless charging.
Carga inalámbrica.



Battery capacity.
Capacidad de la batería.



Charging time with sun.
Tiempo de carga con sol.



Crepuscular sensor.
Sensor crepuscular.



Gravity sensor.
Sensor gravitatorio.



Adjustable operating time.
Tiempo de encendido regulable.



EMC anti-interference certification.
Certificación anti interferencias EMC.

RoHS

Restriction of Hazardous Substances.
Restricción de sustancias peligrosas.

CE

European conformity.
Conformidad Europea.

Index

Custom system



Dumi



Dumi Dual



Evo



Evo fly



Evo dual



Evo dual wall



Evo mini



Evo R



Evo E



Evo E opal



Evo mini track



Evo track



Urban



Urban E



Urban train



Urban train E



Urban fly



Urban fly E

Urban work



Urban work E



Urban asymmetric



Urban asymmetric E



Urban wall sensor



Urban track



Urban market



Urban 3PH



Urban closed



Time



Time E



Nexus



Color time



Time wall sensor



Time track



Forest



Dual



Dual inserted track



Kubo



Kubo E



Puzzle



Mirrow

Tax

Linstra

Luxor

Filter line

Filter

Tubi mini

Tubi

Tubi wall mini

Tubi wall


121 Grip


123 Nyneto


125 Minimus


127 Vision


129 Quick


131 Dau


131 Dau E


133 Square


135 New Zero Q


136 New Zero D


137 New Zero T


139 Zero in XL


141 Zero out XL


143 Zero in


145 Zero out


147 Circus in XL


147 Circus out XL


149 Circus in


149 Circus out


151 Tundra


153 Zero direct XL


155 Zero direct


156-157 Zero design


163 Kaa


165 Kaa line


167 Horizon


169 Lift


169 Lift wall


171 Flash


173 Triton


175 Triton down


176-178 New Custom system accessories


179 New Emergency

Profiles



Box 34



Box 57



Box 41



Box 89



Box 15



Box 16



Box 17



Box 18



Box 53



Box 23



Box 87



Box 92



Box 74



Box 43



Box 95



Box 75



Box 38



Box 35



Box 14



Box 71



Box 60



Box 99



Box 11



Box 12



Box 13



Box 10



Box 19



Box 37



Box 24



Box 69



Box 68

Box 32



Box 22



Box 33



Box 98 railing



Box 21



Box 27



Box 65



Box 67



Box 39

Box 28

Box 29

Box 73

Box 30

Led strips

Fine 64

Fine 48

Fine 97

Fine 84

Fine 69

Fine 20

Fine 26

244 New

Fine 31

245

Fine 82

246

Fine 92

247

Fine 52

249

Fine 41

250

Fine 68

251

Fine 79

252

Fine 61

253

Fine 76

255

Fine 96

256

Fine 56

257

Fine 30

259

Fine 51

260

Fine 75

261

Fine 32 N

262

Fine 88

263

Fine 49

264

Fine 55

265

Fine 37

267 New

Fine 86

268 New

Fine 90

269 New

Fine 91

271

Fine 44

273

Fine 63

274

Fine 36

275 New

Fine 81

277

Fine 42

279

Fine 54

281

Fine 46

282

Fine 43

283

Fine 50

285

Fine 60

286

Fine 66 N

287

Fine 71

288

Fine 47

289

Fine 45

291 New

Fine running

293

Fine SPI-2

295

Fine SPI-3

296

Fine SPI-4

297 New

Fine SPI-5

299

Fine DMX-4

301

Fine DMX-5

305

Fine 25

307

Fine 34

309

Fine 77

311

Fine 70

313

Fine 72

315

Fine 74

316 New

Fine 73

317-319

Led strips accessories

291

Dynamic control

223-339
tuya DALI CASAMBI DMX SPI
Control

340-341

Power supplies 24V

331, 343

Sensor

Track lights

Three phase track



Three phase track



Alp 3PH suspension



Ark 3PH suspension



Atmos 3PH suspension



Atmos GU10 3PH suspension



Bora 3PH suspension



Lievo 3PH suspension



Zoe 3PH suspension



Hat 3PH suspension



Cookie 3PH suspension



Sphere 3PH suspension



Picolo 3PH



Picolo GU10 3PH



Picolo AR111 3PH



Cookie 3PH



Oculum 3PH



Zoom 3PH



Aston 3PH / Konic 3PH



Lonja 3PH



Lonja XL 3PH



Lena 3PH



Crown 3PH



Kom 3PH



Alfa 3PH



Tram 3PH



Sono 3PH

Magnet track mini



Magnet track mini



Picolo 48V mini



Atmos slim 48V mini



Zoe 48V mini



Zoe 48V mini susp.



Sphere 48V mini



Sphere 48V mini susp.



Mini Concord 48V mini



Concord 48V mini



Tram 48V mini



Line 48V mini

Magnet track



Magnet track 48V



Power supplies 48V



Casambi control



Alp 48V



Alp 48V suspension



Mini Bora 48V



Bora 48V suspension



Tram 48V



Curve tram 48V



Line 48V



Curve line 48V



Diro 48V



Zoe 48V suspension



Hat 48V suspension



Sphere 48V



Sphere 48V suspension



Volt 48V



Dot 48V



Cookie 48V



Cookie 48V suspension



Fine 25 circle 48V

Outdoor track



Outdoor Track IP



Power supplies 48V IP



Frame 48V IP



Atmos slim 48V IP

Bit 48V IP



Ice 48V IP

Recessed



Argo recessed



Atom recessed



Micro Zoom recessed



Nano Pulsar recessed



Nano Pulsar trim



Nano pulsar surface



Pulsar dimm recessed



Pulsar trim



Pulsar surface



Nano Oxo recessed



Mini Oxo recessed



Mini Oxo rect recessed



Oxo dimm recessed

Bora recessed


473 Tram recessed


475 Compac recessed


477 Pulcom recessed


479 Pulcom led accessory


479 Pulcom trim


479 Pulcom surface


481 New Tao recessed


483 Noi recessed


485-487 Thessis recessed


489 Air recessed


491 Bonn recessed


493 Fijo recessed


493 Basculante recessed


493 Eclipse recessed


495 One recessed


495 Zio recessed


497 Luk recessed


499 Bathroom recessed


499 Rok recessed


501 Avant recessed

Surface


504-505 Golf surface


507 Bora surface


509 Alp surface


511 Plus surface


513 Concord surface


515 Rubyc surface


517 Volt base


519 Volt 3 surface


520 Volt GU10 base


521 Volt 3 GU10 surface


523 Picolo base


525 Picolo GU10 surface


525 Picolo AR111 surface


527 Crown base


529-531 Kora surface


533 Nox surface


535 One surface


535 Zio surface


535 Avant surface

Suspension

541 New
Sphere space

542 New
Hat space

543 New
Cookie space

544 New
Atmos slim space

545 New
Ark space

547
Alp space

549
Bora space

551
Lievo space

553
Zoe space

555-557
Side base / Front base

559
Ark suspension

561
Atmos slim susp.

563
Atmos suspension

565
Atmos GU10 susp.

567
Zoe suspension

569
Hat suspension

571
Bora suspension

573
Cookie susp. base

575
Tot suspension

Wall

579
Lao

581
Ilo

581
Skin

583
Port

583
Grow

583
Steps

585
Pun

587
Pure wall

589
Sweet wall

591
Beam wall

593
Icon wall

595
Tron

597
Sphere alp wall

599
One GU10 wall

601
Zio GU10 wall

Portable and table

605 New
Asti

607
Bag

609
Bimba

611
Converse

613
Madi

615
Visor portable

617
Stem

Outdoor


621 Polo


621 Luky


623 Ina / Dis / Nix


625 Mis wall


627 Artis wall


629 Tween


631 Lek sensor


633 Lek wall


635 Sphere wall


637 Oma


639 Clos wall


641-643 New Neo


645 Mac wall


647 Mac wall base


649 Comet


651 Zibor


651 Selen


653 Blis


655-657 Sunset


659 Pla


661 Optic


663 Sigma


665 Caddie


665 Fade


667 Zas


669 Nik


671 Signal


673 Sair


675 Fix


677 Wech


679 Sky spike


680-681 Sky switch


684-685 New Sky 4CCT


687 Sky sensor


688-689 Sky


691 New Polaris


693 Krion


695 Clos base


697 New Cam


699 Mac floor

701 Tura

703 Joint IP68

Solar

707 Gam

709 Twist

711 Popa

713 Proa

715 Egna

717 Iris

719 Visor solar

721 Sky solar sensor

Industrial



Ufo Lens switch



Ufo Lens Dali

Retrofit



Tutto MR11 / GU10



Hook GU10 /dimm.



Uniform-line MR16 / GU10 / dimm.



Narrow GU10 dimm.



System MR16 / GU10 /dimmable



R-63 s-line GU10



Power MR16 / GU10 / dimmable



Lynk G53 / GU10 / dimmable



AR111 15° G53 / GU10



Nitro GU10 / Dole GU10



Shop E14 / Prisma E14



Flama E14 / E27 / dimmable



Esférica E14 / E27 / dimmable



Standard E27 / dimmable



Globo E27 / dimmable



R-39 E14



R-50 E14



R-63 E27



R-80 E27



R-90 E27



Pl T40 E27



Par 30 E27



Par 38 E27



Par 38 Green E27



Sil E27



Aria E27 / E40



Obo E27 / E40



Smile E27 / E40



Cup E27 / E40



Noa E27 / E40



Adn G4



Uniform-line G4



Uniform-line G9



Max BA15d



Cala G24



Lineal tubular R7S / dimmable



Lineal R7S



HQI tubular E27 / G12

HQI tubular RX7S

Collections

Alp



Nano Alp 3PH suspension



Alp 3PH suspension



Alp 48V



Alp 48V suspension



Alp surface



Nano Alp space



Alp space

Ark



Ark 3PH suspension



Ark space



Ark suspension

Atmos



Atmos 3PH suspension



Atmos XL 3PH suspension



Atmos GU10 3PH suspension



Atmos GU10 3PH XL suspension



Atmos slim 48V mini



Atmos slim 48V IP



Atmos slim space



Atmos slim susp.



Atmos suspension



Atmos XL suspension



Atmos GU10 suspension



Atmos GU10 XL suspension

Blis



Blis r



Blis sq



Blis rect

Bora



Bora 3PH suspension



Bora XL 3PH suspension



Mini Bora 48V



Bora 48V suspension



Bora surface



Bora recessed



Bora space



Bora XL space

Circus



Circus in XL



Circus out XL



Circus in



Circus out

Concord



Mini Concord 48V mini



Concord 48V mini



Concord surface



Mini Concord surface

Cookie



Cookie 3PH suspension



Cookie 3PH



Cookie 48V



Cookie 48V suspension



Cookie space



Cookie suspension base

Crown



Crown 3PH



Crown base

Evo



Evo



Evo fly



Evo dual



Evo dual wall



Evo mini



Evo R



Evo E



Evo E opal



Evo mini track



Evo track

Filter



Filter line



Filter

Hat



Mini Hat 3PH suspension



Hat 3PH suspension



Mini Hat 48V suspension



Hat 48V suspension



Mini Hat suspension



Hat suspension

Kaa



Kaa



Kaa line

Lievo



Lievo 3PH susp.



Lievo XL 3PH susp.



Lievo space



Lievo XL space

Oxo



Nano Oxo recessed



Mini Oxo recessed



Mini Oxo rect 2 recessed



Mini Oxo 4 rect recessed



Mini Oxo 6 rect recessed



Oxo dimm recessed

Picolo



Picolo 3PH



Picolo GU10 3PH



Picolo AR111 3PH



Picolo 48V mini



Picolo base



Picolo GU10 surface



Picolo AR111 surface

Sphere



Sphere 3PH susp.



Sphere 48V mini



Sphere 48V



Sphere 48V susp.



Sphere space



Sphere wall



Sphere alp wall

Sunset



Sunset r



Sunset sq



Sunset XL



Sunset XL dual

Time



Time



Time E



Time wall sensor



Color time



Time track



Forest

Tram



Tram 3PH



Tram 48V mini



Tram 48V



Nano Tram recessed



Mini Tram recessed



Tram recessed



Tram XL recessed

Triton



Triton



Triton down

Tubi



Tubi mini



Tubi



Tubi wall mini



Tubi wall

Urban



Urban



Urban E



Urban train



Urban train E



Urban fly



Urban fly E



Urban work



Urban work E



Urban asymmetric



Urban asymmetric E



Urban wall sensor



Urban track



Urban market



Urban 3PH



Urban closed

Volt



Volt 48V



Volt base



Volt 3 surface



Volt GU10 base



Volt 3 GU10 surface

Zero



Zero D



Zero T



Zero Q



Zero in XL



Zero out XL



Zero in



Zero out



Zero direct XL



Zero direct



Zero design



Zero up & down

Zoe



Zoe 3PH susp.



Zoe XL 3PH susp.



Zoe 48V mini



Zoe 48V mini susp.



Zoe 48V suspension



Zoe space



Zoe XL space

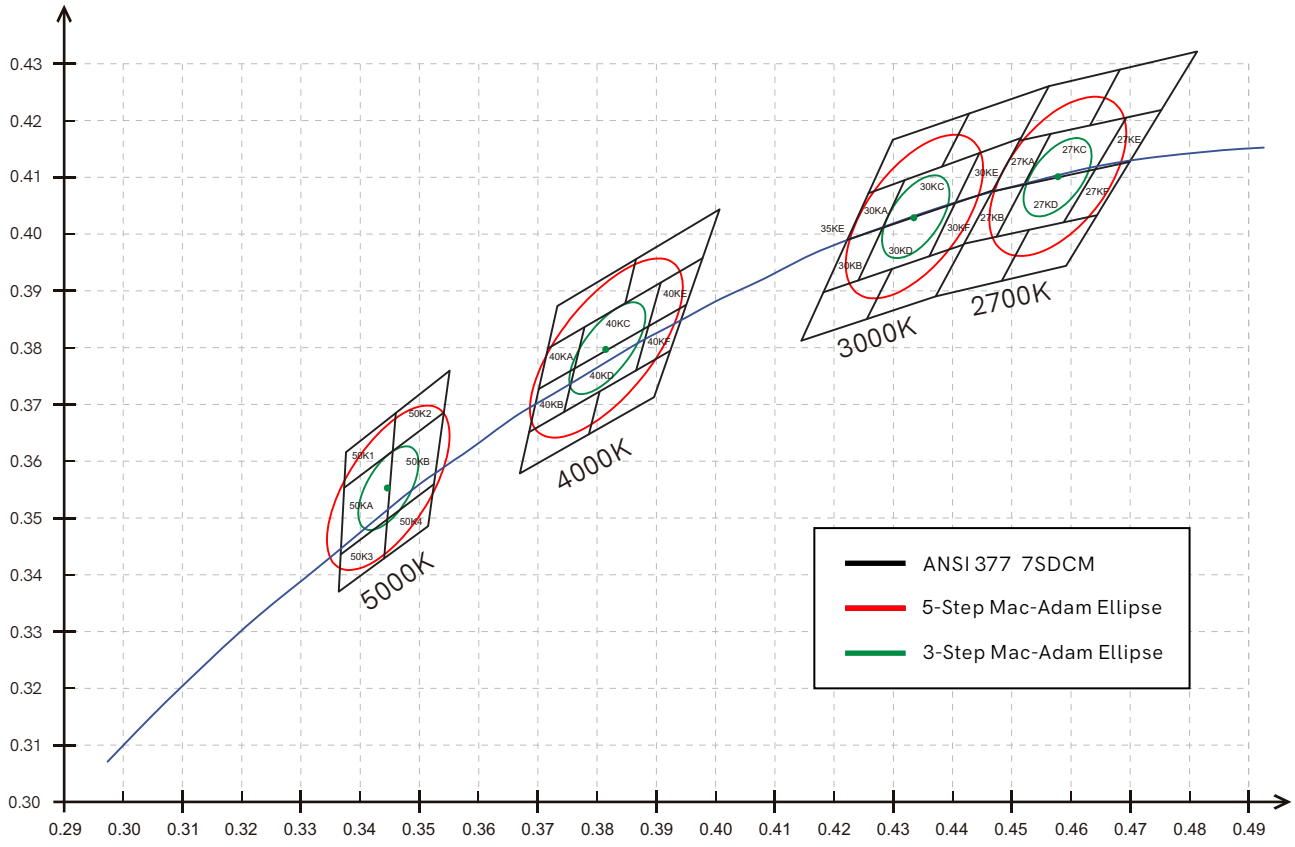

Steps MacAdam are a measurement that describes the color variation perceptible to the human eye. They are a series of ellipses that represent the changes in the different CCTs. The fewer MacAdam steps, the greater the perceived uniformity and consistency of color. All our products have 3 or 5 steps MacAdam.

ONE binning are groups of LEDs that are formed based on the same characteristics in light intensity and CCT. This ensures continuity in CCT and brightness in different manufacturing batches.

Los pasos **Steps MacAdam** son una medida que describe la variación de color perceptible por el ojo humano. Son una serie de elipses que representan los cambios en los diferentes CCT. Cuantos menos pasos MacAdam, mayor uniformidad y consistencia de color se percibe. Todos nuestros productos tienen 3 o 5 pasos MacAdam.

ONE binning son grupos de LEDs que se forman en base a las mismas características en intensidad luminosa y CCT. Esto asegura la continuidad en CCT y brillo en diferentes lotes de fabricación.

The effects of light
Efectos de la luz

The different CCT of light and colors affect human beings in a direct way in emotions, mood and sense of well-being. Warmer light tends to create a more welcoming and relaxing atmosphere. Cooler light tends to be more stimulating and can help maintain alertness and focus. Color-changing lighting can also attract attention to a certain area. In the same way, using an inappropriate CCT or changing color too quickly can negatively affect the users of the space, causing discomfort and stress.

Las distintas TMC de luz y colores afectan al ser humano de forma directa en las emociones, el estado de ánimo y la sensación de bienestar. La luz más cálida tiende a crear un ambiente más acogedor y relajante y luz más fría tiende a ser más estimulante y puede ayudar a mantener el estado de alerta y la concentración.
La iluminación que cambia de color también puede atraer la atención hacia una zona determinada.
Del mismo modo, utilizar un TAC inadecuado o cambiar de color demasiado rápido puede afectar negativamente a los usuarios del espacio, provocando incomodidad y estrés.





Custom system

The custom lighting

Our R&D and Production departments are responsible for designing special parts and customized solutions to meet the unique needs of our customers. Our commitment is to offer customized solutions with the highest quality and guaranteed compliance with regulations and certifications.

Our R&D services stand out for:
- Customized Design and Development: Our team of R&D experts works closely with customers to understand their specific challenges and needs. We use cutting-edge technology and creativity to conceive and design custom parts and solutions that perfectly fit your requirements.
- Constant Innovation: We maintain a constant focus on innovation. We are committed to keeping up with the latest trends, technologies, and design practices to ensure that our solutions are always cutting-edge and effective.
- Quality Production: Our production department is equipped with state-of-the-art machinery and a highly trained team. This allows us to carry out the manufacture of parts designed accurately and efficiently, maintaining high quality standards.
- Adaptation to Regulations and Certifications: We understand the importance of complying with regulations and certifications. Our products and solutions are designed and manufactured in strict compliance with applicable standards, thus ensuring safety and compliance with current regulations.
- Energy efficiency: With the need to change consumption patterns and in line with the sustainable development objectives of the 2030 Agenda, we are increasingly trying to develop environmental and sustainability policies, both in our products and services, as well as in all phases of the production chain.
- Efficiency and cost-effectiveness: We take advantage of technology and innovation to optimize processes and maximize production efficiency. This not only guarantees quality, but also cost-effectiveness for our customers.
- Personalized Customer Service: We pride ourselves on providing world-class customer service. We are available to answer your questions, adjust designs according to your changing needs, and provide exceptional after-sales service.

When you trust our R&D and production department, you are choosing a complete solution tailored to your needs, backed by quality, innovation and commitment to regulations and certifications. We are ready to be your partner in the search for customized solutions of the highest quality. Contact us and find out how we can help you achieve your goals!



Nuestros departamentos de I+D y de Producción son los encargados de diseñar piezas especiales y soluciones a medida para satisfacer las necesidades únicas de nuestros clientes. Nuestro compromiso es ofrecer soluciones personalizadas con la máxima calidad y garantía de cumplimiento de normativas y certificaciones.

Nuestros servicios de I+D destacan por:
- Diseño y Desarrollo Personalizado: Nuestro equipo de expertos en I+D trabaja de cerca con los clientes para comprender sus desafíos y necesidades específicas. Utilizamos tecnología de vanguardia y creatividad para concebir y diseñar piezas y soluciones a medida que se adapten perfectamente a sus requerimientos.
- Innovación Constante: Mantenemos un enfoque constante en la innovación. Estamos comprometidos a mantenernos al tanto de las últimas tendencias, tecnologías y prácticas de diseño para asegurarnos de que nuestras soluciones sean siempre vanguardistas y eficaces.
- Producción de Calidad: Nuestro departamento de producción cuenta con maquinaria de última generación y un equipo altamente capacitado. Esto nos permite llevar a cabo la fabricación de las piezas diseñadas de manera precisa y eficiente, manteniendo altos estándares de calidad.
- Adaptación a Normativas y Certificaciones: Entendemos la importancia de cumplir con las normativas y certificaciones. Nuestros productos y soluciones son diseñados y fabricados con estricto cumplimiento de los estándares aplicables, garantizando así la seguridad y la conformidad con la normativa vigente.
- Eficiencia energética: Con la necesidad de cambiar los modelos de consumo y en la línea de los objetivos de desarrollo sostenible de la Agenda 2030, cada vez más se intenta desarrollar políticas medioambientales y de sostenibilidad, tanto en nuestros productos y servicios, como en todas las fases de su cadena de producción.
- Eficiencia y Costo-efectividad: Aprovechamos la tecnología y la innovación para optimizar procesos y maximizar la eficiencia en la producción. Esto no solo garantiza la calidad, sino también un costo razonable para nuestros clientes.
- Atención al Cliente Personalizada: Nos enorgullece ofrecer un servicio al cliente de primer nivel. Estamos disponibles para atender sus preguntas, ajustar diseños según sus necesidades cambiantes y brindar un servicio postventa excepcional.

Cuando confía en nuestro departamento de I+D y producción, está eligiendo una solución completa y adaptada a sus necesidades, respaldada por la calidad, la innovación y el compromiso con las normativas y certificaciones. Estamos listos para ser su socio en la búsqueda de soluciones personalizadas de la más alta calidad.
¡Contáctenos y descubra cómo podemos ayudarle a alcanzar sus objetivos!



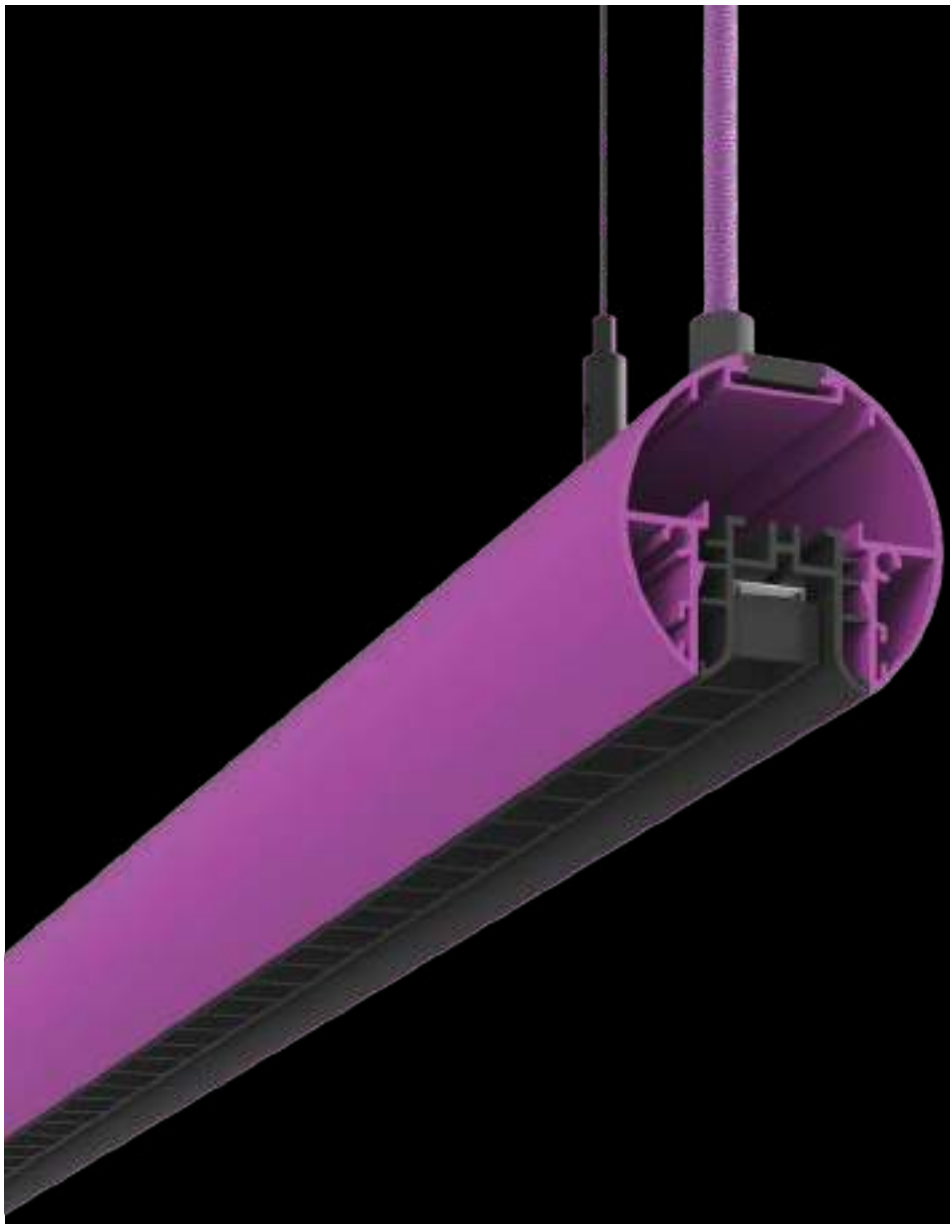

Do you want a custom-made **luminaire**?

Look for the Cutting symbol and consult our sales department!



Customization of the cut and
handling to the requested size.



Do you want to customize **your luminaires**?

Look for the Custom RAL symbol and consult our sales department!



Custom RAL

▶ VIDEO

	Model	Page	Power	Section Size	Installation
	CIRCUS IN XL	147	37W/65W/94W	38x21 mm	Pendant
	CIRCUS OUT XL	147	37W/65W/94W	38x21 mm	Pendant
	CIRCUS IN	149	26W/44W/63W	30x11 mm	Pendant
	CIRCUS OUT	149	26W/44W/63W	30x11 mm	Pendant
NEW	COLOR TIME	85	43W/54W/64W/75W	39x75 mm	Pendant
	DAU	131	18W/23W/26W/30W	25x25 mm	Surface / Pendant
	DAU E	131	18W/23W/26W/30W	34x25 mm	Recessed
	DUAL	93	18-24W/28-35W/ 46-52W	39x125 mm	Pendant
NEW	DUMI	41	31-38W/38-47W/ 46-56W/53-74W	Ø68 mm	Pendant
NEW	DUMI DUAL	43	44-51W/54-63W/ 66-76W/76-97W	Ø68 mm	Pendant
	EVO	45	38W/47W/56W/74W	28x60 mm	Pendant
	EVO DUAL	49	49W/61W/73W/86W	24x75 mm	Pendant / Wall
	EVO E	52	10W/21W/31W/42W 52W/63W/73W	34x25 mm	Recessed
NEW	EVO E OPAL	53	2W/6W/12W/18W 24W/30W/36W/42W	34x25 mm	Recessed
	EVO FLY	47	44W/55W/66W/77W	24x75 mm	Pendant
	EVO MINI	51	38W/47W/56W/74W	28x25 mm	Surface / Pendant
	EVO MINI TRACK	55	9W/18W	28x25 mm	Track
	EVO R	51	38W/47W/56W/74W	35x25 mm	Surface / Pendant
	EVO TRACK	57	38W/56W	90x57 mm	Track
	FILTER	109	32W/120W	Ø60 mm	Pendant
NEW	FILTER LINE	107	48W/64W/80W 69W/92W/120W	Ø60 mm	Pendant
	FLASH	171	16W/27W/35W/ 46W/55W	18x49 mm	Wall
	FOREST	91	31W/38W/46W/53W	64x95 mm	Pendant
	GRIP	121	26W/33W/39W/46W	Ø28 mm	Pendant
	HORIZON	167	48W-288W	15 mm	Pendant
	KAA	163	90W/180W/300W	Ø25 mm	Pendant

CRI	CCT	IP	Standard finishes
≥90 CRI	2700K 3000K 4000K RGB-W CCT	20 IP	White Black Matt Gold Silver
≥90 CRI	2700K 3000K 4000K RGB-W CCT	20 IP	White Black Matt Gold Silver
≥90 CRI	2700K 3000K 4000K RGB-W CCT	20 IP	White Black Matt Gold Silver
≥90 CRI	2700K 3000K 4000K RGB-W CCT	20 IP	White Black Matt Gold Silver
≥95 CRI	2700K 3000K 4000K CCT	40 IP	White Black Gray Green Orange Red Violet Pastel blue Light blue
≥90 CRI	2700K 3000K 4000K 5000K RGB-W CCT	20 IP	White Black
≥90 CRI	2700K 3000K 4000K 5000K RGB-W CCT	20 IP	White Black
≥95 CRI	2700K 3000K 4000K 5000K	40 IP	White Black
≥95 CRI	2700K 3000K 4000K CCT	40 IP	White Black Gray Green Orange Red Violet Pastel blue Light blue
≥95 CRI	2700K 3000K 4000K CCT	40 IP	White Black Gray Green Orange Red Violet Pastel blue Light blue
≥90 CRI	2700K 3000K 4000K RGB-W CCT	40 IP	White Black
≥80 CRI	2700K 3000K 4000K RGB-W	40 IP	White Black
≥90 CRI	2700K 3000K 4000K RGB-W CCT	40 IP	White Black
≥90 CRI	2700K 3000K 4000K	40 IP	White Black
≥90 CRI	2700K 3000K 4000K CCT	40 IP	White Black
≥90 CRI	2700K 3000K 4000K CCT	40 IP	White Black
≥90 CRI	2700K 3000K 4000K	40 IP	White Black
≥90 CRI	2700K 3000K 4000K CCT	40 IP	White Black
≥90 CRI	2700K 3000K 4000K	40 IP	White Black
≥90 CRI	2700K 3000K 4000K RGB	20 IP	White Black
≥90 CRI	2700K 3000K 4000K RGB	20 IP	White Black
≥80 CRI	2700K 3000K 4000K 6000K	20 IP	White Black Alum.
≥95 CRI	2700K 3000K 4000K 5000K CCT	40 IP	Wood
≥90 CRI	2700K 3000K 4000K RGB CCT	40 IP	Black
≥90 CRI	2700K 3000K 4000K	20 IP	White Black
≥90 CRI	2400K 2700K 3000K 4000K CCT	40 IP	White Black

	Model	Page	Power	Section Size	Installation
	KAA LINE	165	30W/60W/100W	Ø25 mm	Pendant
	KUBO	95	31W/38W/46W/54W	36,5x34 mm	Surface / Pendant
	KUBO E	95	31W/38W/46W/54W	50x35 mm	Recessed
	LIFT	169	33W/42W/51W/59W 16W/27W/35W	35x61,7 mm	Pendant / Wall
NEW	LINSTRA	103	8W/12W/16W	Ø36 mm	Wall
NEW	LUXOR	105	24W/28W/34W/40W	Ø36 mm	Wall
	MINIMUS	125	25W/31W/37W/43W	16x25 mm	Surface / Pendant
	MIRROW	99	85W/94W	36,5x33,5 mm	Pendant
	NEXUS	84	46W/70W	39x75 mm	Pendant
	NYNETO	123	16W/20W/24W/28W	10x12 mm	Pendant
NEW	PUZZLE	97	8W /10W/12W	36,5x33,5mm	Pendant
	QUICK	129	20W/30W/41W/ 51W/61W/71W	60x86 mm	Wall
	SQUARE	133	43W/62W	25x25 mm	Pendant
	TAX	101	52W/64W	36,5x33,5 mm	Pendant
	TIME	83	31W/46W/69W	39x75 mm	Surface / Pendant
	TIME E	83	31W/46W/69W	54x75 mm	Recessed
	TIME TRACK	89	15W/23W/31W	39x75 mm	Track
	TIME WALL SENSOR	87	15W/23W/31W	39x75 mm	Wall
	TRITON	173	21W/41W/61W	47x66 mm	Surface
	TRITON DOWN	175	46W/57W/69W/ 80W/103W	47x66 mm	Surface / Pendant
	TUBI	115	35W/44W/53W/62W	Ø62 mm	Pendant
NEW	TUBI MINI	113	21W/27W/32W/37W	Ø40 mm	Pendant
	TUBI WALL	119	35W/44W/53W	Ø62 mm	Wall
NEW	TUBI WALL MINI	117	21W/27W/32W/37W	Ø40 mm	Wall
	TUNDRA	151	77W/112W	21x38 mm	Pendant
	URBAN	60	46W/57W/69W/ 80W/103W	58x68 mm	Surface / Pendant

CRI	CCT	IP	Standard finishes
≥90 CRI	2400K 2700K 3000K 4000K RGB-W CCT	40 IP	White Black Matt Gold
≥95 CRI	2700K 3000K 4000K 5000K RGB-W CCT	20 IP	White Black
≥95 CRI	2700K 3000K 4000K RGB-W CCT	40 IP	White Black
≥90 CRI	2700K 3000K 4000K RGB-W CCT	40 IP	White Black
≥95 CRI	2400K 2700K 3000K 4000K	55 IP	White Black
≥95 CRI	2700K 3000K 4000K RGB CCT	20 IP	Black
≥90 CRI	2700K 3000K 4000K	40 IP	White Black
≥95 CRI	2700K 3000K 4000K RGB-W CCT	20 IP	White Black
≥95 CRI	CCT	40 IP	White Black Gray
≥90 CRI	2700K 3000K 4000K	20 IP	White Black
≥90 CRI	2700K 3000K 4000K RGB CCT	40 IP	White Black
≥90 CRI	2700K 3000K 4000K RGB CCT	20 IP	White Black
≥90 CRI	2700K 3000K 4000K RGB-W CCT	20 IP	White Black Matt Gold Silver
≥95 CRI	2700K 3000K 4000K RGB-W CCT	20 IP	White Black
≥95 CRI	2700K 3000K 4000K 5000K	40 IP	White Black Gray
≥95 CRI	2700K 3000K 4000K 5000K	40 IP	White Black Gray
≥95 CRI	2700K 3000K 4000K 5000K	20 IP	White Black
≥95 CRI	2700K 3000K 4000K 5000K	20 IP	White Black Gray
≥80 CRI	2700K 3000K 4000K	65 IP	Black
≥95 CRI	2700K 3000K 4000K 5500K	65 IP	White Black
≥95 CRI	2700K 3000K 4000K 5000K RGB-W CCT	40 IP	White Black
≥95 CRI	2700K 3000K 4000K RGB CCT	40 IP	White Black
≥95 CRI	2700K 3000K 4000K RGB-W CCT	40 IP	White Black
≥95 CRI	2700K 3000K 4000K RGB CCT	40 IP	White Black
≥80 CRI	2700K 3000K 4000K RGB-W CCT	20 IP	White Black Matt Gold Silver
≥95 CRI	2700K 3000K 4000K 5000K CCT	40 IP	White Black Gray Matt Gold Corten Copper

	Model	Page	Power	Section Size	Installation
NEW	URBAN 3PH	81	-	59x69 mm	Track
	URBAN ASYMMETRIC	73	25W/31W/37W/ 43W/55W	58x68 mm	Surface / Pendant
	URBAN ASYMMETRIC E	73	25W/31W/37W/ 43W/55W	75x68 mm	Recessed
NEW	URBAN CLOSED	81	-	59x69 mm	Surface
	URBAN E	65	46W/57W/69W/ 80W/103W	75x68 mm	Recessed
	URBAN FLY	69	2X14W/3X14W 4X14W/6X14W	58x68 mm	Pendant
	URBAN FLY E	69	2X14W/3X14W 4X14W/6X14W	75x68 mm	Recessed
	URBAN MARKET	79	45W/55,5W/66W/ 76,5W/97,5W	58x68 mm	Surface / Pendant
	URBAN TRACK	77	21W/32W/43W	58x68 mm	Track
	URBAN TRAIN	67	46W/57W/69W/80W	58x68 mm	Pendant
	URBAN TRAIN E	67	46W/57W/69W/80W	75x68 mm	Recessed
	URBAN WALL SENSOR	75	21W/32W/43W	58x68 mm	Wall
	URBAN WORK	71	35W/43W/51W/ 59W/97,5W	58x68 mm	Pendant
	URBAN WORK E	71	35W/43W/51W/ 59W/97,5W	75x68 mm	Recessed
	VISION	127	33W/42W/51W/59W	30x35 mm	Surface / Pendant
NEW	ZERO D	136	78W/120W/180W	11x30 mm	Pendant
	ZERO DESIGN	156-157	22W/m	36,5x33,5 mm	Surface / Pendant
	ZERO DIRECT	155	35W/55W/75W/94W 189W	36,5x33,5 mm	Surface / Pendant
	ZERO DIRECT XL	153	78W/105W/131W	95x90 mm	Pendant
	ZERO IN	143	26W/44W/63W/96W	11x30 mm	Pendant
	ZERO IN XL	139	37W/65W/94	21x38 mm	Pendant
	ZERO OUT	145	26W/44W/63W/96W	11x30 mm	Pendant
	ZERO OUT XL	141	37W/65W/94	21x38 mm	Pendant
NEW	ZERO Q	135	246W	11x30 mm	Pendant
NEW	ZERO T	137	148W /218W	11x30 mm	Pendant
NEW	ZERO UP & DOWN	161	90W/110W/130W/165W	36,5X70 mm	Pendant

CRI	CCT	IP	Standard finishes
-	-	20 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K	40 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K	40 IP	White, Black
-	-	20 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K, 5000K, CCT	40 IP	White, Black, Gray
≥90 CRI	2700K, 3000K, 4000K	40 IP	White, Black
≥90 CRI	2700K, 3000K, 4000K	40 IP	White, Black
80/93 CRI	3000K, MEAT R, HAM, MEAT M, 4000K, FISH, FRUIT, BREAD	40 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K, 5000K, CCT	20 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K, 5000K, CCT	40 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K, 5000K, CCT	40 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K, 5000K	20 IP	White, Black, Gray
≥95 CRI	2700K, 3000K, 4000K, 5000K, CCT	40 IP	White, Black
≥95 CRI	2700K, 3000K, 4000K, 5000K, CCT	40 IP	White, Black
≥90 CRI	2700K, 3000K, 4000K, RGB-W, CCT	40 IP	White, Black
≥90 CRI	2700K, 3000K, 4000K, CCT	20 IP	White, Black, Matt Gold, Silver
≥80 CRI	2700K, 3000K, 4000K, CCT	20 IP	White, Black, Gray, Matt Gold
≥80 CRI	2700K, 3000K, 4000K, CCT	20 IP	White, Black, Matt Gold, Silver
≥80 CRI	2700K, 3000K, 4000K	20 IP	White, Black, Gray
≥90 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black, Matt Gold, Silver
≥90 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black, Matt Gold, Silver
≥90 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black, Matt Gold, Silver
≥90 CRI	2700K, 3000K, 4000K, RGB-W, CCT	20 IP	White, Black, Matt Gold, Silver
≥90 CRI	2700K, 3000K, 4000K, CCT	20 IP	White, Black, Matt Gold, Silver
≥90 CRI	2700K, 3000K, 4000K, CCT	20 IP	White, Black, Matt Gold, Silver
≥80 CRI	2700K, 3000K, 4000K, CCT	20 IP	White, Black



NEW

Dumi



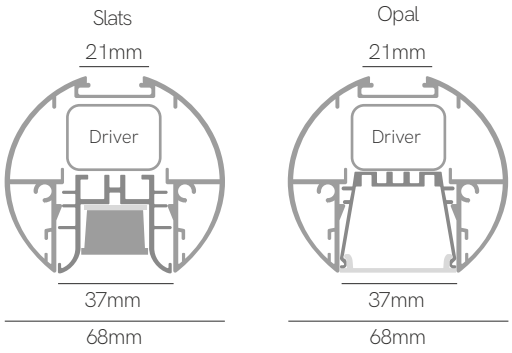

*Finished luminaire. Includes suspension kit and textile power cable.

Control accessories: tuya page 327 pages 326-333

Technical Information

Power	31-38W / 38-47W / 46-56W / 53-74W
Lumens	2.821 lm - 10.064 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power UGR & Opal/Black slats)	CCT (lm/W)	Driver	Colour
Code D	UGR (78°) 3	1.170mm (31/38W) 3	2.700K (91-112 lm/W) 2	On / Off 1	White (9003) 1
	Opal (112°) 5	1.450mm (38/47W) 4	3.000K (96-128 lm/W) 3	Triac 4	Black (9005) 2
	Black slats (60°) 9	1.730mm (46/56W) 5	4.000K (103-136 lm/W) 4	Casambi 5	Gray (7037) 3
		2.020mm (53/74W) 6	2.700-5.500K (95-105 lm/W) 9	Tuya 7	Green (6018) 4
					Orange (2009) 5
					Red (3020) 6
					Violet (4008) 7
					Pastel blue (5024) 8
					Light blue (5012) 9
					ⓘ Custom RAL

Code: D

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (3) <17 (9) | 230 VAC | PF >0,9 | CRI ≥95 | TRIAC DIMM | tuya



NEW

Dumi dual



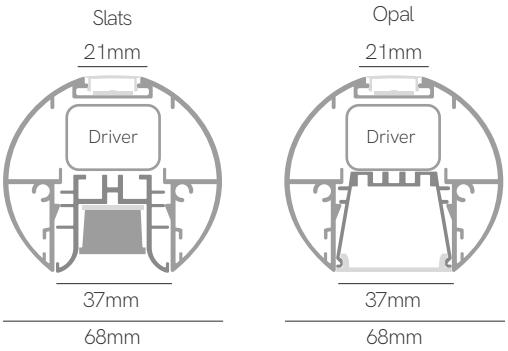

*Finished luminaire. Includes suspension kit and textile power cable.

Control accessories: tuya page 327 pages 326-333

Technical Information

Power	44-51W / 54-63W / 66-76W / 76-97W
Lumens	4.004 lm - 13.192 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Down Rigid / Up Flex

Code	Diffuser (Angle)	Size (Power UGR & Opal/Black slats)	CCT (lm/W)	Driver	Colour
Code D	UGR (78°) P	1.170mm (44/51W) 3	2.700K (91-112 lm/W) 2	On / Off 1	White (9003) 1
	Opal (112°) W	1.450mm (54/63W) 4	3.000K (96-128 lm/W) 3	Triac 4	Black (9005) 2
	Black slats (60°) N	1.730mm (66/76W) 5	4.000K (103-136 lm/W) 4	Casambi 5	Gray (7037) 3
		2.020mm (76/97W) 6	2.700-5.500K (95-105 lm/W) 9	Tuya 7	Green (6018) 4
					Orange (2009) 5
					Red (3020) 6
					Violet (4008) 7
					Pastel blue (5024) 8
					Light blue (5012) 9
					① Custom RAL

Code: D

CE RoHS EMC

① Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (P) <16 (N) | 230 VAC | PF >0,9 | CRI ≥95 | TRIAC DIMM | tuya



Evo





Equipment

Ø60x28mm



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	38W / 47W / 56W / 74W
Lumens	3.268 lm - 8.954 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	2	Black Slats (60°)	N	1.170mm (38W)	2	2.700K (91-104 lm/W)	2	On / Off	1	White (9003)	1
		White Slats (60°)	P	1.450mm (47W)	3	3.000K (96-109 lm/W)	3	Dali	2	Black (9005)	2
				1.730mm (56W)	4	4.000K (103-121 lm/W)	4	Push	3	Custom RAL	
				2.290mm (74W)	6	RGB-W (86 lm/W)	8	Casambi	5		
						2.700-6.500K (95/105 lm/W)	9	Tuya	7		

Code: 2

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-6.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 3,37m Max | tuya | PUSH | DALI 2



Evo fly





Equipment

Ø60x28mm



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories: pages 326-333 pages 334-335

Technical Information

Power	44W / 55W / 66W / 77W
Lumens	3.872 lm - 9.317 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Down Rigid / Up Flex

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	Down Black Slats (60°) Up Opal N	1.120mm (44W) 4	2.700K Down (91-104 lm/W) Up (88 lm/W) 2	On / Off 1	White (9003) 1
	Down White Slats (60°) Up Opal P	1.400mm (55W) 5	3.000K Down (96-109 lm/W) Up (92 lm/W) 3	Dali 2	Black (9005) 2
		1.680mm (66W) 6	4.000K Down (104-121 lm/W) Up (96 lm/W) 4	Push 3	① Custom RAL
		1.960mm (77W) 7	2.700K 6.500K Down (95-105 lm/W) Up (100 lm/W) 5	Casambi 5	

Code: 4

CE RoHS EAC

① Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-6.500K only works with driver 5 Casambi.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,96m Max | PUSH | DALI 2



Evo dual





Evo dual wall





Equipment

Control accessories:

tuya page 327

pages 326-333

DALI pages 334-335

Ø60x28mm



Pendant



Wall

*Finished luminaire. Includes power cable and end caps.

Technical Information

Power	49W / 61W / 73W / 86W
Lumens	4.410 lm - 11.696 lm
Installation	Pendant / Wall
Material	Aluminium 6063
PCB	Flex / Rigid

Code	
Code	5

Installation	
Pendant	3
Wall	7

Size (Power)	
1.130mm (49W)	4
1.410mm (61W)	5
1.690mm (73W)	6
1.970mm (86W)	7

CCT (lm/W)	
Down-Up 2.700K (124 lm/W)	2
Down-Up 3.000K (128 lm/W)	3
Down-Up 4.000K (136 lm/W)	4
Down-Up RGB (100 lm/W)	8
Down-Up 1.800-4.000K (90 lm/W)	9
Down 1.800-4.000K Up RGB	C
Down 2.700K Up RGB	D
Down 3.000K Up RGB	T
Down 4.000K Up RGB	Q

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	

Code: 5

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB and CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥80 | 2x90° | 1,96m Max | tuya | PUSH | DALI 2





Evo mini





Evo R





Equipment

Control accessories:

page 327

pages 326-333

pages 334-335

Codes **8** and **3** recessed driver

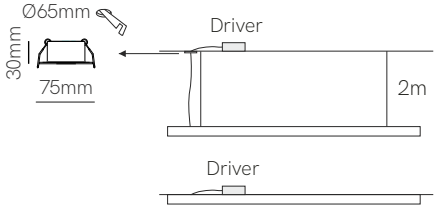

Codes **1** and **7** surface driver



Evo mini Evo R

*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.

Technical Information

Power	38W / 47W / 56W / 74W
Lumens	3.458 lm - 8.954 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Rigid

Code	
Evo mini recessed	8
Evo mini surface	1
Evo r recessed	3
Evo r surface	7

Diffuser (Angle)	
Black Slats (60°)	N
White Slats (60°)	P

Size (Power)	
1.170mm (38W	2
1.450mm (47W)	3
1.730mm (56W)	4
2.290mm (74W)	6

CCT (lm/W)	
2.700K (91-104 lm/W)	2
3.000K (96-109 lm/W)	3
4.000K (103-121 lm/W)	4
2.700-6.500K (95-105 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	

Code:

Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-6.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 3,37m Max | PUSH | DALI 2

Evo E









*Finished luminaire. Includes driver, spring clips, power cable and end caps.

Control accessories: page 327 pages 326-333 pages 334-335

Technical Information

Power	10W / 21W / 31W / 42W / 52W / 63W / 73W
Lumens	860 lm - 8.833 lm
Installation	Recessed
Material	Aluminium 6063
PCB	Rigid

Code	
Code	5

Diffuser (Angle)	
Black Slats (30°)	C
White Slats (30°)	F
Black Slats (60°)	N
White Slats (60°)	P

Size (Power)	
280mm (10W)	1
560mm (21W)	2
840mm (31W)	3
1.120mm (42W)	4
1.400mm (52W)	5
1.680mm (63W)	6
1.960mm (73W)	7

CCT (lm/W)	
2.700K (91-104 lm/W)	2
3.000K (96-109 lm/W)	3
4.000K (104-121 lm/W)	4
RGB-W (86 lm/W)	8
2.700-6.500K (95-105 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	

Code: 5

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-6.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,96m Max | PUSH

NEW

Evo E opal

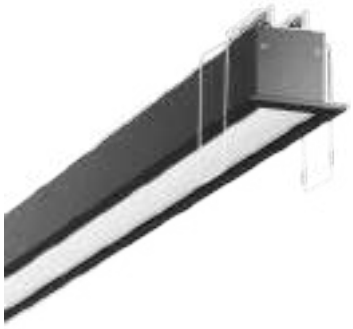







*Finished luminaire. Includes driver, spring clips, power cable and end caps.

Control accessories: pages 326-333 pages 334-335

Technical Information

Power	2W / 6W / 12W / 18W / 24W / 30W / 36W / 42W
Lumens	200 lm - 4.620 lm
Installation	Recessed
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)	
Code	5	Opal (112°)	0

Size (Power)	
100mm (2W)	0
280mm (6W)	1
560mm (12W)	2
840mm (18W)	3
1.120mm (24W)	4
1.400mm (30W)	5
1.680mm (36W)	6
1.960mm (42W)	7

CCT (lm/W)	
2.700K (100 lm/W)	2
3.000K (105 lm/W)	3
4.000K (110 lm/W)	4

Driver	
On / Off	1
Casambi	5
Dali / Push	8

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	

Code: 5 0

CE RoHS EMC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 1,96m Max | DALI 2 PUSH



Evo mini track





Equipment



*Finished luminaire.

Technical Information

Power	9W / 18W
Lumens	819 lm - 2.178 lm
Installation	Three Phase Track
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	6	Black Slats (60°)	N	310mm (9W)	1	2.700K (91-104 lm/W)	2	On / Off	1	White (9003)	1
		White Slats (60°)	P	590mm (18W)	8	3.000K (96-109 lm/W)	3	Triac	4	Black (9005)	2
						4.000K (104-121 lm/W)	4			ⓘ Custom RAL	

Code: 6

CE RoHS

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90







Evo track



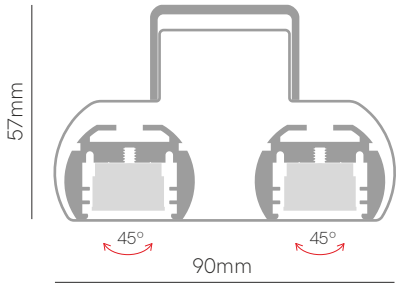

Equipment



*Finished luminaire.

Technical Information

Power	38W / 56W
Lumens	3.458 lm - 6.776 lm
Installation	Three Phase Track
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	9	Black Slats (30°)	C	610mm (38W)	2	2.700K (91-104 lm/W)	2	On / Off	1	White (9003)	1
		White Slats (30°)	F	890mm (56W)	3	3.000K (96-109 lm/W)	3			Black (9005)	2
		Black Slats (60°)	N			4.000K (103-121 lm/W)	4			ⓘ Custom RAL	
		White Slats (60°)	P								

Code: 9 _ _ _ 1 _

CE RoHS EMC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90





Urban collection

Urban





Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	46W / 57W / 69W / 80W / 103W
Lumens	4.830 lm - 14.008 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	6	UGR (78°)	4	1.130mm (46W)	3	2.700K (112 lm/W)	2	On / Off	1	White (9003)	1
		Opal (112°)	5	1.410mm (57W)	4	3.000K (128 lm/W)	3	Dali	2	Black (9005)	2
				1.690mm (69W)	5	4.000K (136 lm/W)	4	Push	3	Gray (9006)	3
				1.970mm (80W)	6	5.000K (136 lm/W)	5	Casambi	5	ⓘ Matt Gold	4
				2.530mm (103W)	7	2.700-5.500K (105 lm/W)	9	Tuya	7	ⓘ Corten	6
										ⓘ Copper	7
										ⓘ Custom RAL	

Code: 6

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

Accessories



End caps
- 40721
- 40722
- 40723

Joint 180°
- 40220

Joint 90°
- 40550

Joint 90°
- 40610

Wall bracket
- 40851
- 40852
- 40853

Trimless
- 40669

Base 3x0,75 (2,5m) Ø60x28mm
- 40881
- 40882
- 40883

Base 5x0,5 (2,5m) Ø60x28mm
- 40991
- 40992
- 40993

Ceiling suspension
- 40780

Suspension Kit
- 40795 (5m)

CE RoHS

Accessories pages 176-179.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | PUSH | DALI 2

Urban emergency



Code		Diffuser (Angle)		Size		CCT (lm/W)		Emergency + Driver		Colour	
Code	6	UGR (78°)	4	1.130mm	3	2.700K (112 lm/W)	2	Emergency + On / Off	K1	White (9003)	1
		Opal (112°)	5	1.410mm	4	3.000K (128 lm/W)	3	Emergency + Dali	K2	Black (9005)	2
				1.690mm	5	4.000K (136 lm/W)	4	Emergency + Push	K3	Custom RAL	
				1.970mm	6	5.000K (136 lm/W)	5	Emergency + Casambi	K5		
				2.530mm	7	2.700-5.500K (105 lm/W)	9				

Code: 6

Emergency
4.000K 200lm
EN 60598-2-2

1/3H.

Urban sensor casambi



Urban sensor incorporates a presence and illuminance (brightness) sensor, this works with the CASAMBI wireless control system via Bluetooth.
The equipment can be configured in different ways to activate scenes of any luminaire of the CASAMBI network by presence or illuminance.

Urban sensor incorpora un detector de presencia e iluminancia (luminosidad), este funciona con el sistema de control inalámbrico CASAMBI mediante Bluetooth. El equipo se puede configurar de diferentes maneras para activar escenas de cualquier luminaria de la red CASAMBI por presencia o iluminancia.

Code		Diffuser (Angle)		Size		CCT (lm/W)		Sensor + Driver		Colour	
Code	6	UGR (78°)	4	1.130mm	3	2.700K (112 lm/W)	2	Sensor + Casambi	8	White (9003)	1
		Opal (112°)	5	1.410mm	4	3.000K (128 lm/W)	3			Black (9005)	2
				1.690mm	5	4.000K (136 lm/W)	4			Custom RAL	

Code: 6 8


01
02

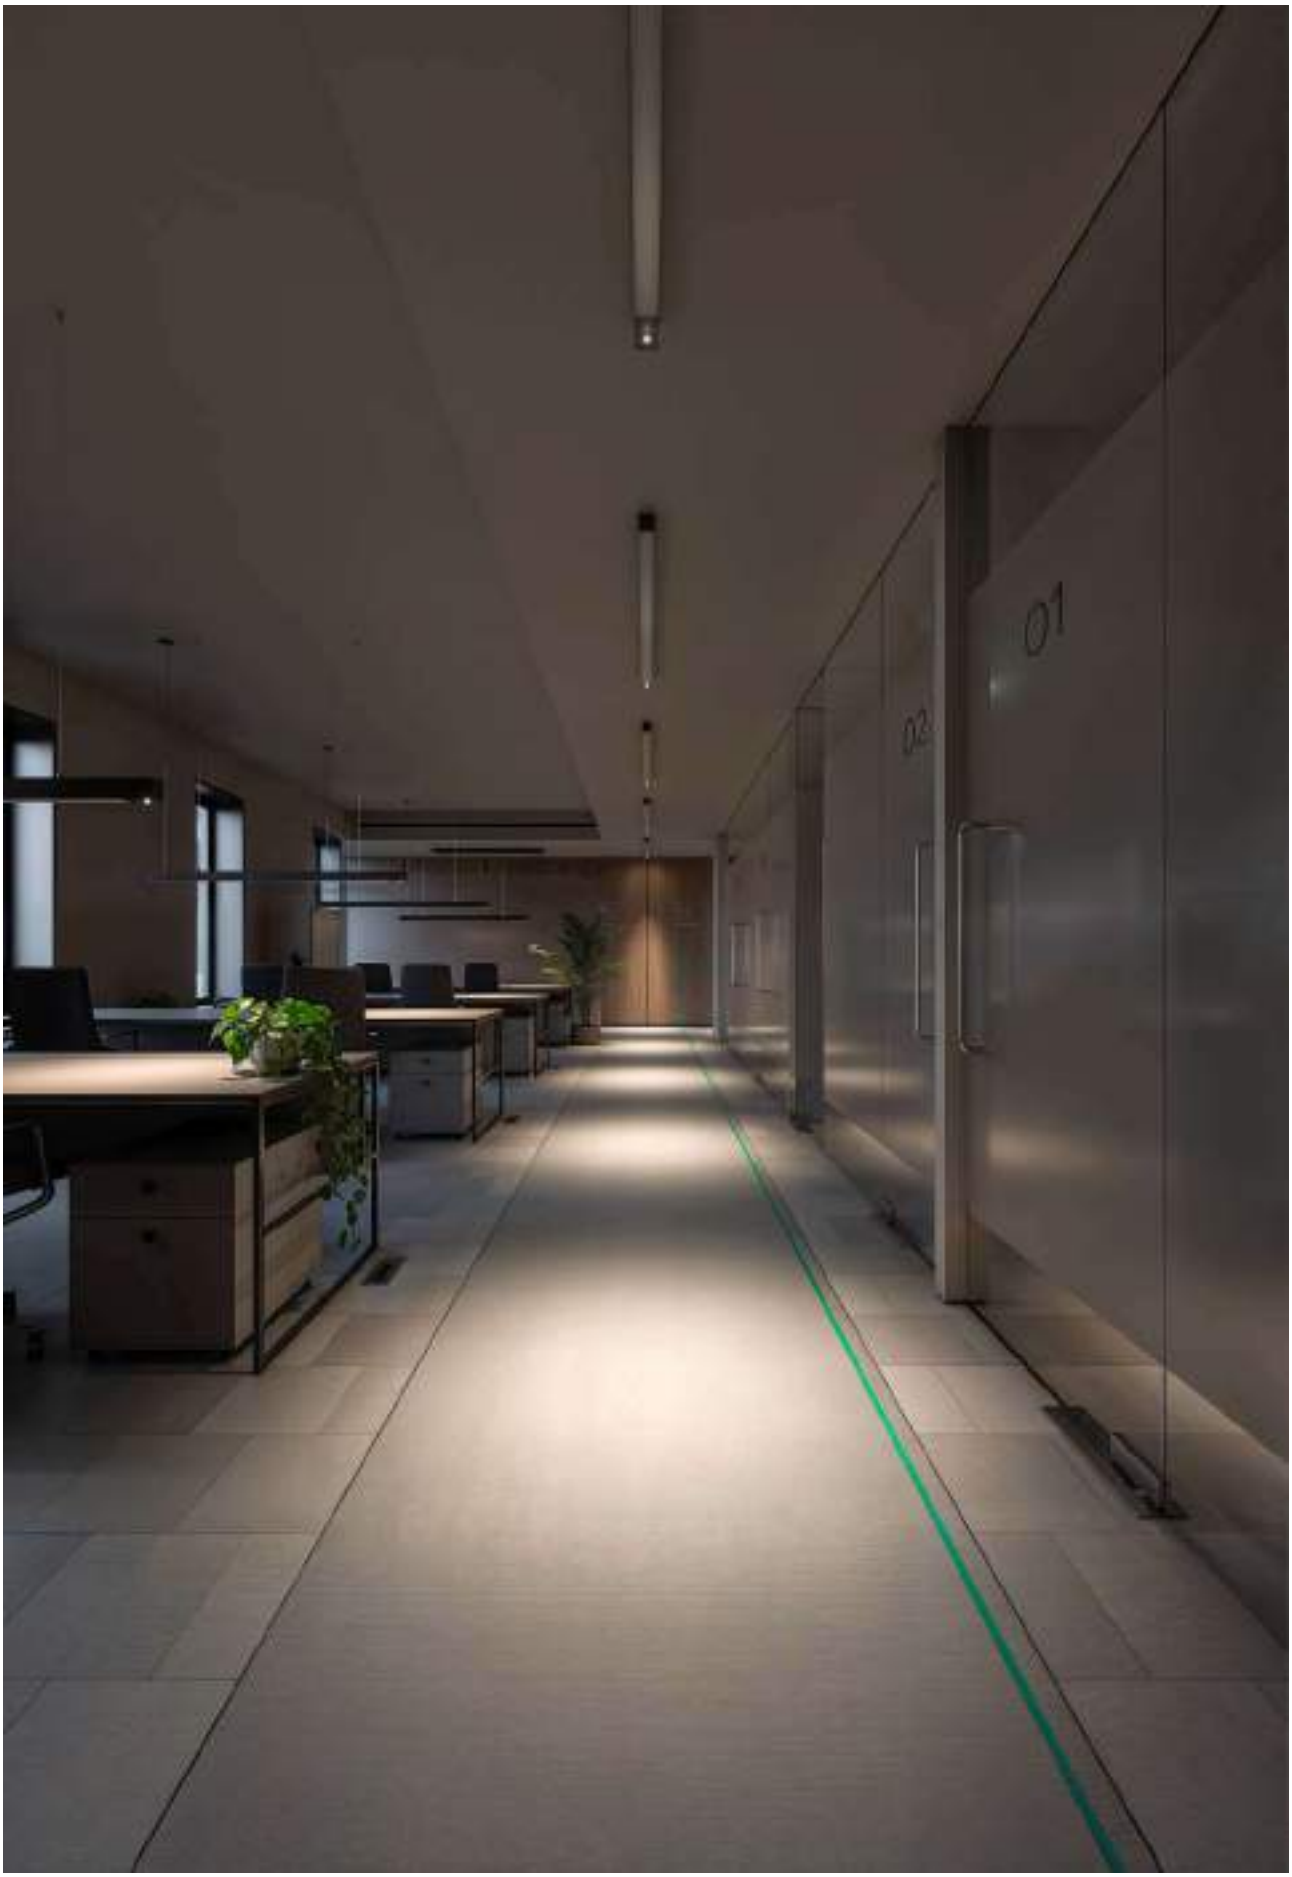
01
02



Urban E



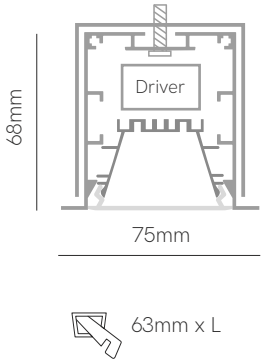

63mm x L

*Spring clips included.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	46W / 57W / 69W / 80W / 103W	Material	Aluminium 6063
Lumens	4.830 lm - 14.008 lm	PCB	Rigid
Installation	Recessed		

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver / Emergency	Colour
Code 3	UGR (78°) 4	1.130mm (46W) 3	2.700K (112 lm/W) 2	On / Off 1	White (9003) 1
	Opal (112°) 5	1.410mm (57W) 4	3.000K (128 lm/W) 3	Dali 2	Black (9005) 2
		1.690mm (69W) 5	4.000K (136 lm/W) 4	Push 3	Gray (9006) 3
		1.970mm (80W) 6	5.000K (136 lm/W) 5	Casambi 5	Custom RAL
		2.530mm (103W) 7	2.700-5.500K (105 lm/W) 9	Tuya 7	
				Emergency + On / Off K1	
				Emergency + Dali K2	
				Emergency + Push K3	
				Emergency + Casambi K5	

Code: 3

Accessories pages 176-179.

Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

Accessories

End caps
- 40731
- 40732
- 40733



Joint 180° 40220



Joint 90° 40550



Joint 90° 40610

CE RoHS

Emergency 4.000K 200lm | 1/3H.
EN 60598-2-2

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | PUSH | DALI 2

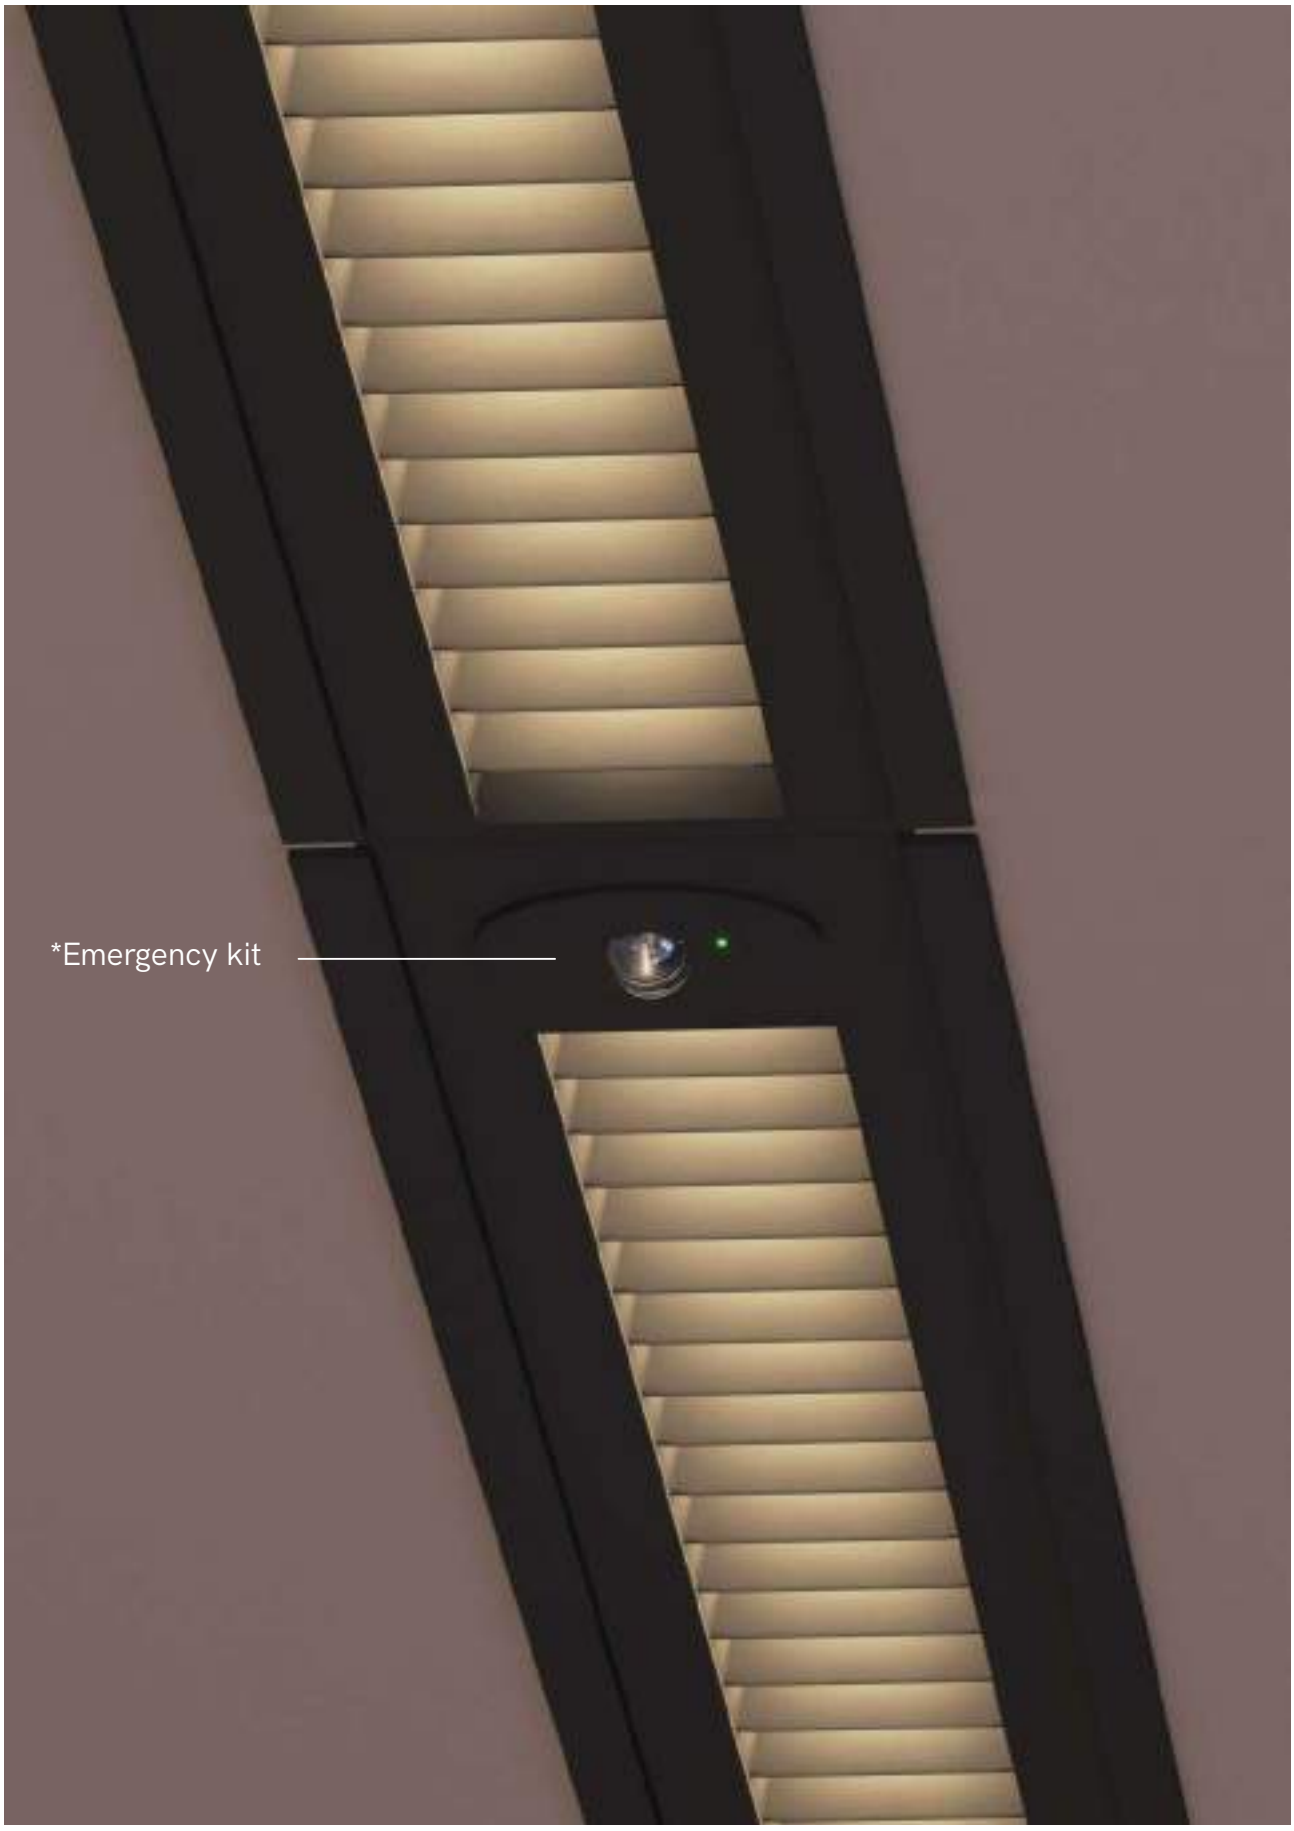

*Optional emergency kit with self-contained luminaire, high luminosity SMD LED with lens ideal for corridors and evacuation routes.

Urban train E





63mm x L

*Finished luminaire.
Includes clips, power cable and end caps.

Urban train





*Finished luminaire.
Includes suspension kit, power cable and end caps.

Equipment

Ø60x28mm



Urban train E

Urban train

Control accessories: pages 326-333 pages 334-335

Technical Information

Power	46W / 57W / 69W / 80W
Lumens	4.830 lm - 10.880 lm
Installation	Recessed / Pendant

Material	Aluminium 6063
PCB	Rigid

Code	
Train E	8
Train	6

Diffuser (Angle)	
Black Slats (62°)	2
Alum. Slats (84°)	7

Size (Power)	
1.130mm (46W)	3
1.410mm (57W	4
1.690mm (69W)	5
1.970mm (80W)	6

CCT (lm/W)	
2.700K (112 lm/W)	2
3.000K (128 lm/W)	3
4.000K (136 lm/W)	4
5.000K (136 lm/W)	5
2.700-5.500K (105 lm/W)	9

Driver / Emergency	
On / Off	1
Dali	2
Push	3
Casambi	5
Emerg.+ On / Off	K1
Emerg.+ Dali	K2
Emerg.+ Push	K3
Emerg.+ Casambi	K5

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	

Code:

Emergency
4.000K 200lm
EN 60598-2-2

1/3H.

CE RoHS EAC

Accessories pages 176-179. Consult delivery terms and conditions.
*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2



Urban fly E





63mm x L

*Finished luminaire.
Includes clips, power cable and end caps.

Urban fly





Equipment

Ø60x28mm



*Finished luminaire. Includes suspension kit, power cable and end caps.

4. 2x14W = 1.130mm

5. 3x14W = 1.690mm

7. 4x14W = 1.130mm

8. 6x14W = 1.690mm

Urban fly E

Urban fly

Control accessories: pages 326-333 pages 334-335

Technical Information

Power	2x14W / 3x14W / 4x14W / 6x14W
Lumens	3.192 lm - 11.424 lm
Installation	Recessed / Pendant
Material	Aluminium 6063
PCB	Rigid

Code	
Fly E	8
Fly	6

Diffuser (Angle)	
Optical (50°)	9

Size (Power)	
1.130mm (28W)	4
1.690mm (42W)	5
1.130mm (56W)	7
1.690mm (84W)	8

CCT (lm/W)	
2.700K (114 lm/W)	2
3.000K (130 lm/W)	3
4.000K (136 lm/W)	4

Driver / Emergency	
On / Off	1
Dali	2
Push	3
Casambi	5
Emerg.+ On / Off	K1
Emerg.+ Dali	K2
Emerg.+ Push	K3
Emerg.+ Casambi	K5

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	

Code: 9

Emergency
4.000K 200lm
EN 60598-2-2

1/3H.

CE RoHS EAC

Accessories pages 176-179. Consult delivery terms and conditions.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2


▶ VIDEO
12



Urban work E





63mm x L

*Finished luminaire.
Includes clips, power cable and end caps.

Urban work





*Finished luminaire.
Includes suspension kit, power cable and end caps.

Equipment

Ø60x28mm



Control accessories: pages 326-333 DALI pages 334-335

Urban work E

Urban work

Technical Information

Power	35W / 43W / 51W / 59W / 97,5W
Lumens	3.675 lm - 11.505 lm
Installation	Recessed / Pendant

Material	Aluminium 6063
PCB	Rigid

Code	
Work E	7
Work	6

Diffuser (Angle)	
Retracted (102°)	3

Size (Power)	
1.130mm (35W)	3
1.410mm (43W)	4
1.690mm (51W)	5
1.970mm (59W)	6
2.530mm (97,5W)	7

CCT (lm/W)	
2.700K (105 lm/W)	2
3.000K (112 lm/W)	3
4.000K (118 lm/W)	4
5.000K (118 lm/W)	5
2.700-5.500K (105 lm/W)	9

Driver / Emergency	
On / Off	1
Dali	2
Push	3
Casambi	5
Emerg.+ On / Off	K1
Emerg.+ Dali	K2
Emerg.+ Push	K3
Emerg.+ Casambi	K5

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	

Code: 3

Emergency
4.000K 200lm
EN 60598-2-2

1/3H.

CE RoHS EMC

Accessories pages 176-179. Consult delivery terms and conditions.
*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2



Urban asymmetric E





63mm x L

*Spring clips included.

Urban asymmetric





Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Urban asymmetric E

Urban asymmetric

Technical Information

Power	25W / 31W / 37W / 43W / 55W
Lumens	1.650 lm - 4.290 lm
Installation	Recessed and Surface / Pendant
Material	Aluminium 6063
PCB	Flex (Fine 52)

Code	
Asymmetric E	3
Asymmetric	6

Diffuser (Angle)	
Opal asym. (30°/60°)	8

Size (Power)	
1.130mm (25W)	3
1.410mm (31W)	4
1.690mm (37W)	5
1.970mm (43W)	6
2.530mm (55W)	7

CCT (lm/W)	
2.700K (66 lm/W)	2
3.000K (72 lm/W)	3
4.000K (78 lm/W)	4

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
N Black (9005)	2
ⓘ Custom RAL	

Code: 8

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.

Common accessories


Joint 180°
40220


Joint 90°
40550

Urban asymmetric E accessories

End caps
40731
40732

Urban asymmetric accessories

End caps
40721
40722


Base 3x0,75 (2,5m) Ø60x28mm
40881
40882


Base 5x0,5 (2,5m) Ø60x28mm
40991
40992


Ceiling suspension
40780


Suspension Kit (2m)
40790

CE RoHS EAC

Accessories pages 176-179.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | PUSH | DALI 2



Urban wall sensor



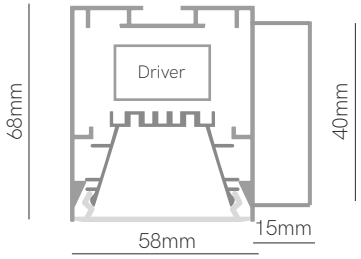

*Finished luminaire. Includes power supply, base wall and end caps.

Technical Information

Power	21W / 32W / 43W
Lumens	2.352 lm - 5.848 lm
Installation	Wall
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	6	Opal (112°)	1	570mm (21W)	1	2.700K (112 lm/W)	2	Motion sensor	0	White (9003)	1
				840mm (32W)	2	3.000K (128 lm/W)	3			Black (9005)	2
				1.130mm (43W)	3	4.000K (136 lm/W)	4			Gray (9006)	3
						5.000K (136 lm/W)	5			ⓘ Custom RAL	

Code: 6 1 0

CE RoHS EAC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | 2m 100° | PF >0,9 | CRI ≥95


1
2
SALA

Urban track





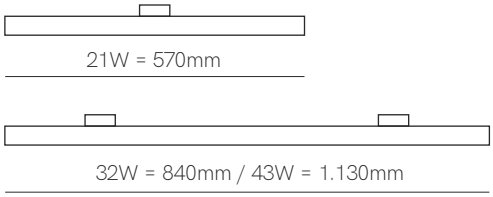

*Finished luminaire.

Control accessories: pages 326-333

Technical Information

Power	21W / 32W / 43W
Lumens	2.352 lm - 5.848 lm
Installation	Three Phase Track
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	6	UGR (78°)	4	570mm (21W)	4	2.700K (112 lm/W)	2	On / Off	4	White (9003)	1
		Opal (112°)	5	840mm (32W)	6	3.000K (128 lm/W)	3	Casambi	6	Black (9005)	2
				1.130mm (43W)	8	4.000K (136 lm/W)	4			① Custom RAL	
						5.000K (136 lm/W)	5				

Code: 6

CE RoHS EAC

① Consult delivery terms and conditions.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | UGR <19 (4) | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH



Urban market





Control accessories: DALI pages 334-335

Technical Information

Power	45W / 55,5W / 66W / 76,5W / 97,5W
Lumens	5.040 lm - 13.552 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Rigid

Code	
Code	2

Diffuser (Angle)	
Asymmetric (15°/60°)	1
Double asym.(60°/60°)	2
Optical (30°)	3
Optical (60°)	6
Optical (90°)	9

Size (Power)	
1.130mm (45W)	3
1.410mm (55,5W)	4
1.690mm (66W)	5
1.970mm (76,5W)	6
2.530mm (97,5W)	7

CCT (lm/W)	
3.000K (112 lm/W)	3
4.000K (118 lm/W)	4
MEAT R - 3.200K (86 lm/W)	R
HAM - 3.200K (85 lm/W)	X
MEAT M - 3.500K (84 lm/W)	M
FISH - 6.500K (139 lm/W)	F
FRUIT - 4.200K (123 lm/W)	V
BREAD - 2.700K (131 lm/W)	P

Driver	
On / Off	1
Dali	2

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	

Code: 2

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.

Accessories

End caps
□ 40721
■ 40722



Joint 180°
■ 40220



Joint 90°
■ 40550



Base 3x0,75 (2,5m)
Ø60x28mm
○ 40881
● 40882



Base 5x0,5 (2,5m)
Ø60x28mm
○ 40991
● 40992



Ceiling suspension
● 40780



Suspension Kit
● 40795 (5m)

CE RoHS EMC

Accessories pages 176-179.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI 80/93 | 3,37m Max | DALI 2



NEW

Urban 3PH





Technical Information

Installation	Three Phase Track	Material	Aluminium 6063

Code		Size (Power)		Driver		Colour	
Code	**51**	1.000mm	**10**	On / Off	**1**	White (9003)	**1**
		2.000mm	**20**			Black (9005)	**2**
		3.000mm	**30**			ⓘ Custom RAL	

Code: **5** **1** _ _ **1** _

NEW

Urban closed





Technical Information

Installation	Surface	Material	Aluminium 6063

Code		Size (Power)		Driver		Colour	
Code	**52**	1.000mm	**10**	On / Off	**1**	White (9003)	**1**
						Black (9005)	**2**
						ⓘ Custom RAL	

Code: **5** **2** **1** **0** **1** _

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

5 YEARS WARRANTY | IP 20 | 230 VAC | Urban 3PH 3m Max | Urban closed 1m Max



Time E



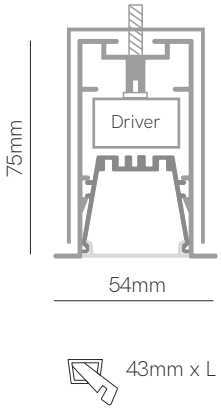

*Spring clips included.

Time





Control accessories: pages 326-333 pages 334-335

Technical Information

Power	31W / 46W / 69W
Lumens	3.472 lm - 9.384 lm
Installation	Recessed and Surface / Pendant
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Time E	9	UGR (81°)	3	1.130mm (31W)	3	2.700K (112 lm/W)	2	On / Off	1	White (9003)	1
Time	8	Opal (112°)	5	1.690mm (46W)	5	3.000K (128 lm/W)	3	Dali	2	Black (9005)	2
				2.530mm (69W)	7	4.000K (136 lm/W)	4	Push	3	Gray (9006)	3
						5.000K (136 lm/W)	5	Casambi	5	Custom RAL	

Code: _ _ _ _ _ _

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.

Common accessories



Joint 180° ■ 40770

Joint 90° ■ 40990

Time E accessories

End caps
□ 40751
■ 40752
□ 40753

Time accessories



End caps
□ 40741
■ 40742
□ 40743

Wall bracket
□ 40851
■ 40852
□ 40853

Trimless
■ 40339



Base 3x0,75 (2,5m) Ø60x28mm
○ 40881
● 40882
○ 40883



Base 5x0,5 (2,5m) Ø60x28mm
○ 40991
● 40992
○ 40993



Recessed base 3x0,75 (2,5m) Ø75x30mm
○ 40831
● 40832
○ 40833



Recessed base 5x0,5 (2,5m) Ø75x30mm
○ 40931
● 40932
○ 40933



Ceiling suspension
● 40780



Suspension Kit (5m)
● 40795

CE RoHS EMC

Accessories pages 176-179.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2

Nexus





Equipment

Ø60x28mm



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories: page 327 pages 326-333

Technical Information

Power	46W / 70W
Lumens	4.830 lm - 7.350 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	UGR (81°) 4	1.130mm (46W) 3	2.700-5.500K (105 lm/W) 9	Casambi 5	White (9003) 1
		1.690mm (70W) 5		Tuya 7	Black (9005) 2
				RF Control 9	Gray (9006) 3
					Custom RAL

Code: 4 4 9

CE RoHS

Consult delivery terms and conditions.

*Create your code acording to your preferences. RF included on Driver RF Control.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | RF

NEW

Color time

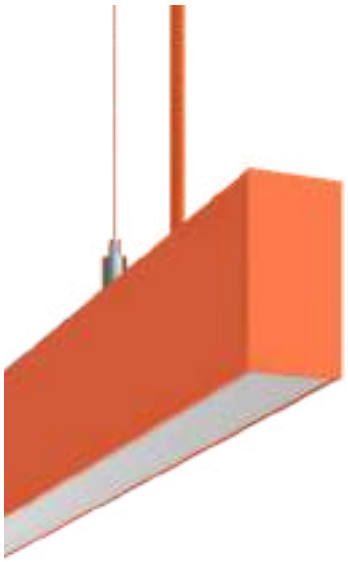



Equipment

Ø60x28mm



*Finished luminaire. Includes suspension kit and textile power cable.

Control accessories: tuya page 327 pages 326-333

Technical Information

Power	43W / 54W / 64W / 75W
Lumens	4.300 lm - 8.250 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	8	UGR (81°)	0	1.130mm (43W)	3	2.700K (100 lm/W)	2	On / Off	1	White (9003)	1
				1.410mm (54W)	4	3.000K (105 lm/W)	3	Triac	4	Black (9005)	2
				1.690mm (64W)	5	4.000K (110 lm/W)	4	Casambi	5	Gray (7037)	3
				1.970mm (75W)	6	2.700-5.500K (100 lm/W)	9	Tuya	7	Green (6018)	4
										Orange (2009)	5
										Red (3020)	6
										Violet (4008)	7
										Pastel blue (5024)	8
										Light blue (5012)	9
										ⓘ Custom RAL	

Code: 8 0

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | TRIAC DIMM | tuya


14
14

Time wall sensor





*Finished luminaire. Includes power supply, base wall and end caps.

Technical Information

Power	15W / 23W / 31W
Lumens	1.680 lm - 4.216 lm
Installation	Wall
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	8	Opal (112°)	1	570mm (15W)	1	2.700K (112 lm/W)	2	Motion sensor	0	White (9003)	1
				840mm (23W)	2	3.000K (128 lm/W)	3			Black (9005)	2
				1.130mm (31W)	3	4.000K (136 lm/W)	4			Gray (9006)	3
						5.000K (136 lm/W)	5			ⓘ Custom RAL	

Code: 8 1 0

CE RoHS EAC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 2m 100° | 230 VAC | PF >0,9 | CRI ≥95



Time track





Equipment



15W = 570mm



23W = 840mm / 31W = 1.130mm

Control accessories: pages 326-333

Technical Information

Power	15W / 23W / 31W
Lumens	1.680 lm - 4.216 lm
Installation	Three Phase Track
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	8	UGR (81°)	3	570mm (15W)	4	2.700K (112 lm/W)	2	On / Off	4	White (9003)	1
		Opal (112°)	5	840mm (23W)	6	3.000K (128 lm/W)	3	Casambi	6	Black (9005)	2
				1.130mm (31W)	8	4.000K (136 lm/W)	4			ⓘ Custom RAL	
						5.000K (136 lm/W)	5				

Code: 8

CE RoHS EMC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95



Forest



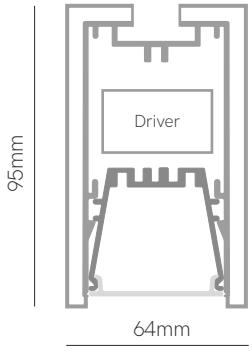

Equipment

Ø60x28mm



*Finished luminaire. Includes suspension kit and power cable.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	31W / 38W / 46W / 53W
Lumens	3.255 lm - 7.208 lm
Installation	Pendant
Material	Aluminium 6063 and wood
PCB	Rigid

Code	
Code	4

Diffuser (Angle)	
UGR (81°)	3
Opal (112°)	5

Size (Power)	
1.155mm (31W)	3
1.435mm (38W	4
1.715mm (46W)	5
1.995mm (53W)	6

CCT (lm/W)	
2.700K (112 lm/W)	2
3.000K (128 lm/W)	3
4.000K (136 lm/W)	4
5.000K (136 lm/W)	5
2.700-5.500K (105 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
Wood	8

Code: 4 _ _ _ _ 8

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95 | tuya | PUSH | DALI 2



Dual





Opal/UGR

Dual inserted track



Spot not included



Track/UGR

Equipment



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories: pages 326-333 pages 334-335

Technical Information

Power	18-24W / 28-35W / 46-52W
Lumens	Up 2.016 lm - 6.256 lm / Down 2.688 lm - 7.072 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	
Code	5

Diffuser (Angle)	
Opal/UGR (81°)	6
Track/UGR (81°)	9

Size (Power)	
1.130mm (18-24W)	3
1.690mm (28-35W)	5
2.530mm (46-52W)	7

CCT (lm/W)	
2.700K (112 lm/W)	2
3.000K (128 lm/W)	3
4.000K (136 lm/W)	4
5.000K (136 lm/W)	5

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	

Code: 5

CE RoHS

Consult delivery terms and conditions.

*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2





Kubo E





*Finished luminaire. Includes driver, spring clips, power cable and end caps.

Kubo





*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.





Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	31W / 38W / 46W / 54W
Lumens	3.100 lm - 6.264 lm
Installation	Recessed and Surface / Pendant

Material	Aluminium 6063
PCB	Rigid / RGB-W Flex

Code	
Kubo E	5
Kubo	7

Diffuser (Angle)	
Opal (100°)	5

Size (Power)	
1.130mm (31W	3
1.410mm (38W	4
1.690mm (46W)	5
1.970mm (54W)	6

CCT (lm/W)	
2.700K (100 lm/W)	2
3.000K (105 lm/W)	3
4.000K (111 lm/W)	4
5.000K (116 lm/W)	5
RGB-W (100 lm/W)	8
2.700-5.500K (105 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	

Code: 5

CE RoHS

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | Max Kubo 3,37m Kubo E 2m | tuya | PUSH | DALI



NEW

Puzzle





Customizable modular system. Components are supplied separately to allow for bespoke configurations. Power supply required (pages 340-341).

Sistema modular para configuraciones a medida. Componentes por separado, requiere fuente de alimentación (páginas 340-341).

Technical Information

Power	8W / 10W / 12W	Material	Aluminium 6063
Lumens	528 lm - 936 lm	PCB	Flex (Fine 56)
Installation	Pendant		

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	Opal (100°) 1	330mm (8W) 1	2.700K (66 lm/W) 2	24 VDC (without equipment) 0	White (9003) 2
		430mm (10W) 2	3.000K (72 lm/W) 3		Black (9005) 2
		530mm (12W) 3	4.000K (78 lm/W) 4		ⓘ Custom RAL
			RGB (50 lm/W) 7		
			2.700-5.500K (70 lm/W) 9		

Code: 4 1 0

Accessories



End caps
☐ 417701
■ 417702



Joint Y
☐ 419901
■ 419902



Joint 90°
☐ 412201
■ 412202



Joint 120°
☐ 415501
■ 415502



Suspension Kit Metallic (2m)
● 34720
○ 34721
● 34722



Connection

412622	2 Wires M-M-F
412922	2 Wires F-F-M
413633	3 Wires M-M-F
413933	3 Wires F-F-M
414644	4 Wires M-M-F
414944	4 Wires F-F-M

CE RoHS

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 24 VDC | CRI ≥90 | 2m Max


VIDEO

Mirrow







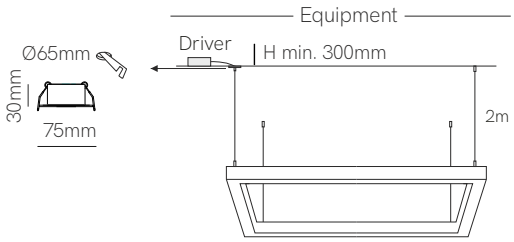

*Finished luminaire. Includes driver, suspension kit, power cable and end caps.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	53W / 80W
Lumens	5.300 lm - 8.880 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid / RGB-W Flex

Code		Diffuser (Angle)		Size (Power)	
Code	7	Opal (100°)	8	595x595mm (53W)	2
				1.050x595mm (80W)	9

CCT (lm/W)		Driver		Colour	
2.700K (100 lm/W)	2	On / Off	1	White (9003)	1
3.000K (105 lm/W)	3	Dali	2	Black (9005)	2
4.000K (111 lm/W)	4	Push	3	Custom RAL	
RGB-W (100 lm/W)	8	Casambi	5		
2.700-5.500K (105 lm/W)	9	Tuya	7		

Code: 7 8

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | tuya | PUSH | DALI 2


▶ VIDEO

Tax







600x600x600mm / 840x840x840mm

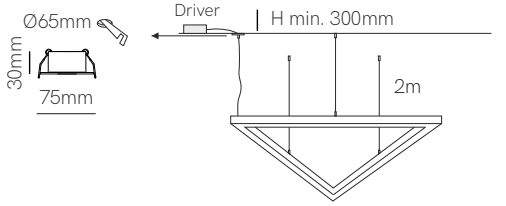

*Finished luminaire. Includes driver, suspension kit, power cable and end caps.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	39W / 55W
Lumens	3.900 lm - 6.105 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid / RGB-W Flex

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	7	Opal (100°)	2	600mm (39W)	4	2.700K (100 lm/W)	2	On / Off	1	△ White (9003)	1
				840mm (55W)	8	3.000K (105 lm/W)	3	Dali	2	▲ Black (9005)	2
						4.000K (111 lm/W)	4	Push	3	ⓘ Custom RAL	
						RGB-W (100 lm/W)	8	Casambi	5		
						2.700-5.500K (105 lm/W)	9	Tuya	7		

Code: 7 2

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | tuya | PUSH | DALI 2



NEW

Linstra



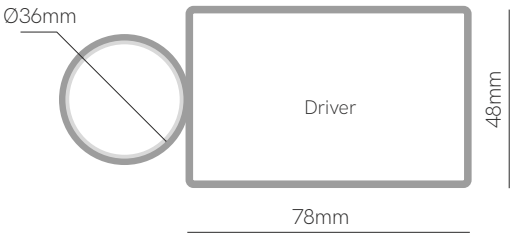









*Finished luminaire. Includes base wall and end caps (aluminium).

Technical Information

Power	8W / 12W / 16W
Lumens	480 lm - 1.168 lm
Installation	Wall
Material	Aluminium and polycarbonate
PCB	Flex (Fine 25)

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	L	Opal (270°)	7	400mm (8W)	1	2.400K (60 lm/W)	1	24 VDC	0	○ White (9003)	1
				600mm (12W)	2	2.700K (65 lm/W)	2	230 VAC	9	● Black (9005)	2
				800mm (16W)	3	3.000K (69 lm/W)	3				
						4.000K (73 lm/W)	4				

Code: L 7

CE RoHS

Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 55 | CRI ≥95



NEW

Luxor







*Finished luminaire.

Control accessories: tuya page 327

Technical Information

Power	24W / 28W / 34W / 40W
Lumens	3.120 lm - 5.600 lm
Installation	Wall
Material	Aluminium and polycarbonate
PCB	Flex (Fine 42 / Fine 54 / Fine 68)

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	9	Opal (90°)	4	1.200mm (24W)	3	2.700K (130 lm/W)	2	24 VDC (without equipment)	0	● Black (9005)	2
				1.400mm (28W)	4	3.000K (135 lm/W)	3	External equipment RF + Tuya	9		
				1.700mm (34W)	5	4.000K (140 lm/W)	4				
				2.000mm (40W)	6	RGB (50 lm/W)	7				
						1.800-4.000K (90 lm/W)	9				

Code: 9 4 _ _ _ 2

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB and CCT 1.800-4.000K only works with driver 9 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 24 VDC | 230 VAC | PF >0,9 | CRI ≥95 | 2m Max | RF + tuya



NEW

Filter line







*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	Monocolor: 48W / 64W / 80W - RGB: 69W / 92W / 120W
Lumens	4.800 lm - 13.320 lm
Installation	Pendant
Material	Aluminium and polycarbonate
Material	Flex (Fine 48 / Fine 54)

Code	Diffuser (Angle)	Size (Power Monocolor - RGB)	CCT (lm/W)	Driver	Colour
Code 3	Opal (360°) 2	1.200mm (48W) - (69W) 5	2.700K (100 lm/W) 2	On / Off 1	○ White (9003) 1
		1.600mm (64W) - (92W) 7	3.000K (105 lm/W) 3	Casambi 5	● Black (9005) 2
		2.000mm (80W) - (120W) 9	4.000K (111 lm/W) 4	Tuya 7	
			RGB (58 lm/W) 7	Dali / Push 8	

Code: 3 2

CE RoHS

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB only works with driver 5 Casambi and 7 Tuya.

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | DALI 2 PUSH

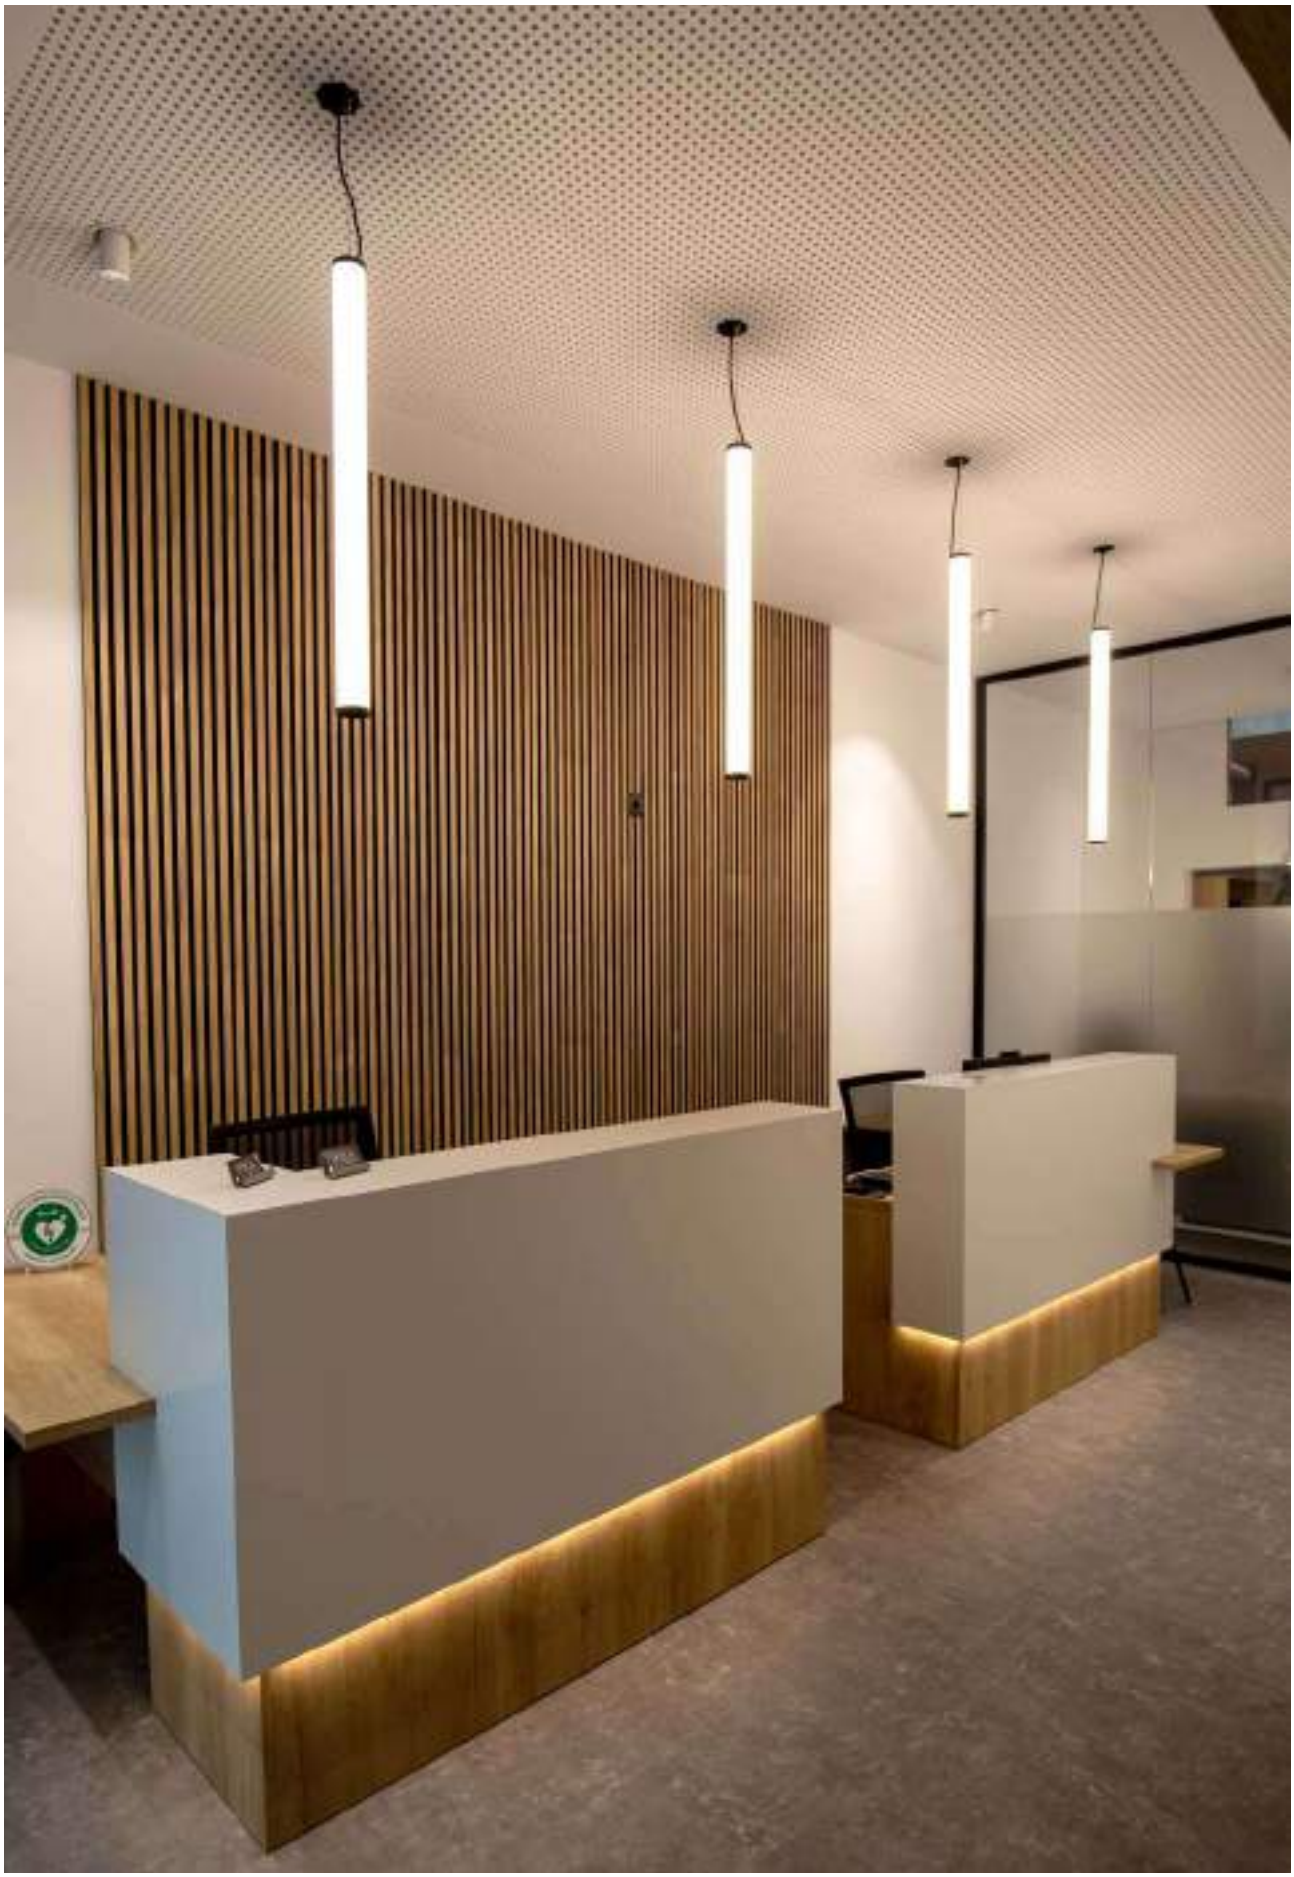

Institut Ferrés Amat, Barcelona (Spain). Lighting project: Vé il·luminació. Architecture: Pablo Amorós.

Filter





Equipment

Code **30** recessed driver



Code **37** surface driver



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	Monocolor: 32W / 48W / 64W / 80W - RGB: 46W / 69W / 92W / 120W
Lumens	3.200 lm - 13.320 lm
Installation	Pendant
Material	Aluminium and polycarbonate
Material	Flex (Fine 48 / Fine 54)

Code / Diffuser (Angle)	
Recessed Opal (360°)	**30**
Surface Opal (360°)	**37**

Size (Power Monocolor - RGB)	
800mm (32W) - (46W)	**3**
1.200mm (48W) - (69)	**5**
1.600mm (64W) - (92)	**7**
2.000mm (80W) - (120W)	**9**

CCT (lm/W)	
2.700K (100 lm/W)	**2**
3.000K (105 lm/W)	**3**
4.000K (111 lm/W)	**4**
RGB (58 lm/W)	**7**

Driver	
On / Off	**1**
Dali	**2**
Push	**3**
Casambi	**5**
Tuya	**7**

Colour	
○ White (9003)	**1**
● Black (9005)	**2**

Code: _ _ _ _ _ _ _

CE RoHS

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB only works with driver 5 Casambi and 7 Tuya.

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | PUSH | DALI 2




01
02


ESTUDIO NOVA

NEW

Tubi mini





Equipment

455x30x28mm



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	21W / 27W / 32W / 37W
Lumens	2.730 lm - 5.180 lm
Installation	Pendant
Material	Aluminium and polycarbonate
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	2	Opal (270°)	0	1.130mm (21W)	3	2.700K (130 lm/W)	2	On / Off	1	White (9003)	1
				1.410mm (27W)	4	3.000K (135 lm/W)	3	Casambi	5	Black (9005)	2
				1.690mm (32W)	5	4.000K (140 lm/W)	4	Tuya	7	Custom RAL	
				1.970mm (37W)	6	RGB (58 lm/W)	7	Dali / Push	8		
						1.800-4.000K (90 lm/W)	9				

Code: 2 0

CE RoHS

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 1,97m Max | tuya | DALI 2 PUSH



Institut Ferrés Amat, Barcelona (Spain). Lighting project: Vé il·luminació. Architecture: Pablo Amorós.

Tubi





Equipment

455x47x28mm



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	35W / 44W / 53W / 62W
Lumens	3.500 lm - 8.432 lm
Installation	Pendant
Material	Aluminium and polycarbonate
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	7	Opal (270°)	1	1.130mm (35W)	3	2.700K (100 lm/W)	2	On / Off	1	White (9003)	1
				1.410mm (44W)	4	3.000K (128 lm/W)	3	Dali	2	Black (9005)	2
				1.690mm (53W)	5	4.000K (136 lm/W)	4	Push	3	Custom RAL	
				1.970mm (62W)	6	5.000K (136 lm/W)	5	Casambi	5		
						RGB-W (100 lm/W)	8	Tuya	7		
						2.700-5.500K (105 lm/W)	9				

Code: 7 1

CE RoHS

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 1,97m Max | tuya | PUSH | DALI 2


01

NEW

Tubi wall mini



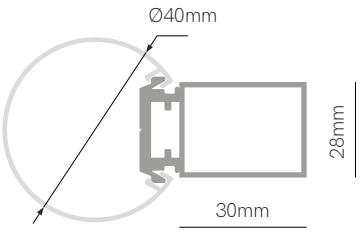

*Finished luminaire. Includes base wall and end caps.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	21W / 27W / 32W / 37W
Lumens	2.730 lm - 5.180 lm
Installation	Wall
Material	Aluminium and polycarbonate
PCB	Rigid

Code		Diffuser (Angle)	
Code	4	Opal (270°)	0

Size (Power)	
1.130mm (21W)	3
1.410mm (27W)	4
1.690mm (32W)	5
1.970mm (37W)	6

CCT (lm/W)	
2.700K (130 lm/W)	2
3.000K (135 lm/W)	3
4.000K (140 lm/W)	4
RGB (58 lm/W)	7
1.800-4.000K (90 lm/W)	9

Driver	
On / Off	1
Casambi	5
Tuya	7
Dali / Push	8

Colour	
White (9003)	1
Black (9005)	2
ⓘ Custom RAL	

Code: 4 0

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 2m Max | tuya | DALI 2 PUSH



Tubi wall



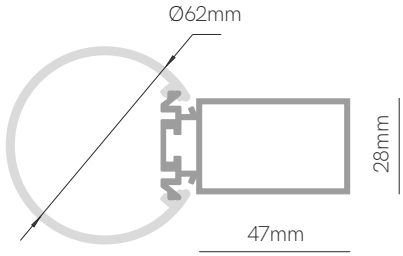

*Finished luminaire. Includes base wall and end caps.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	35W / 44W / 53W
Lumens	3.500 lm - 5.883 lm
Installation	Wall
Material	Aluminium and polycarbonate
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	7	Opal (270°)	9	1.130mm (35W)	3	2.700K (100 lm/W)	2	On / Off	1	White (9003)	1
				1.410mm (44W)	4	3.000K (105 lm/W)	3	Dali	2	Black (9005)	2
				1.690mm (53W)	5	4.000K (111 lm/W)	4	Push	3	① Custom RAL	
						RGB-W (100 lm/W)	8	Casambi	5		
						2.700-5.500K (105 lm/W)	9	Tuya	7		

Code: 7 9

CE RoHS

① Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 2m Max | PUSH | DALI 2



Connecta Fisioteràpia i Salut, Barcelona (Spain).

Grip



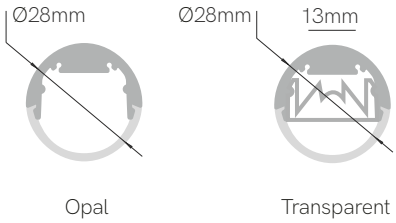

Equipment



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	26W / 33W / 39W / 46W
Lumens	2.522 lm - 4.968 lm
Installation	Pendant
Material	Aluminium and polycarbonate
PCB	Flex (Fine 52)

Code	
Code	2

Diffuser (Angle)	
Opal (100°)	4
Transparent (30°)	8

Size (Power)	
1.130mm (26W)	3
1.410mm (33W)	4
1.690mm (39W)	5
1.970mm (46W)	6

CCT (lm/W)	
2.700K (97 lm/W)	2
3.000K (103 lm/W)	3
4.000K (108 lm/W)	4
RGB (100 lm/W)	8
2.700-5.500K (105 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
Black (9005)	2
Custom RAL	

Code: 2

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | PUSH | DALI 2



Beneito Faure, La Roca del Vallès, Barcelona (Spain).

Nyneto





Equipment



*Finished luminaire. Includes power supply, suspension kit, power cable and end caps.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	16W / 20W / 24W / 28W
Lumens	896 lm - 1.848 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 88)

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	8	Opal (100°)	8	1.120mm (16W)	3	2.700K (56 lm/W)	2	On / Off	1	White (9003)	1
				1.410mm (20W)	4	3.000K (61 lm/W)	3	Dali	2	Black (9005)	2
				1.690mm (24W)	5	4.000K (66 lm/W)	4	Push	3	ⓘ Custom RAL	
				1.970mm (28W)	6			Casambi	5		
								Tuya	7		

Code: 8 8

CE RoHS EMC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 1,97m Max | tuya | PUSH | DALI 2



Minimus





Equipment

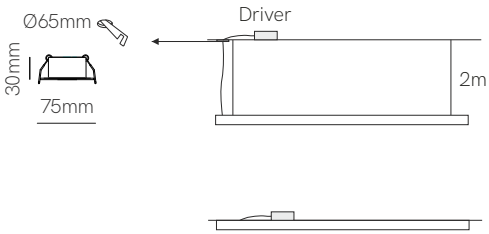

*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	25W / 31W / 37W / 43W
Lumens	2.425 lm - 4.644 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Flex (Fine 52)

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	5	Opal prism (100°)	8	1.170mm (25W)	2	2.700K (97 lm/W)	2	On / Off	1	White (9003)	1
				1.420mm (31W)	4	3.000K (103 lm/W)	3	Dali	2	Black (9005)	2
				1.720mm (37W)	6	4.000K (108 lm/W)	4	Push	3	Custom RAL	
				1.970mm (43W)	8			Casambi	5		
								Tuya	7		

Code: 5 8

CE RoHS EMC

Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 1,97m Max | tuya | PUSH | DALI 2



Vision



Opal / Prismatic



Low glare black



Equipment

455x47x28mm



*Finished luminaire. Includes suspension kit and power cable.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	33W / 42W / 51W / 59W
Lumens	1.980 lm - 9.440 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Rigid

Code	
Code	V

Diffuser (Angle)	
Opal (90°)	4
Prismatic (70°)	6
Low glare black	9

Size (Power)	
1.130mm (33W)	3
1.410mm (42W)	4
1.690mm (51W)	5
1.970mm (59W)	6

CCT (lm/W)	
2.700K (150 lm/W)	2
3.000K (155 lm/W)	3
4.000K (160 lm/W)	4
RGB-W (60 lm/W)	8
2.700-5.500K (100 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	

Code: V

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (9) | 230 VAC | PF >0,9 | CRI ≥95 | tuya | PUSH | DALI 2



Quick

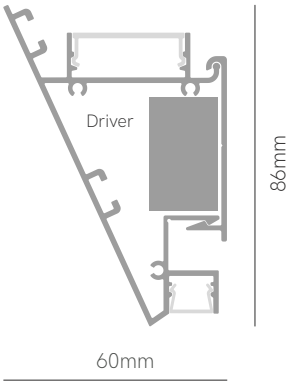

*Finished luminaire. Includes power cable and end caps.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	20W / 30W / 41W / 51W / 61W / 71W
Lumens	1.800 lm - 9.656 lm
Installation	Wall
Material	Aluminium 6063
PCB	Flex / Rigid

Code		Diffuser (Angle)	
Code	4	Opal (100°)	8

Size (Power)	
570mm (20W)	1
850mm (30W)	2
1.130mm (41W)	3
1.410mm (51W)	4
1.690mm (61W)	5
1.970mm (71W)	6

CCT (lm/W)	
Down-Up 2.700K (124 lm/W)	2
Down-Up 3.000K (128 lm/W)	3
Down-Up 4.000K (136 lm/W)	4
Down-Up RGB (100 lm/W)	8
Down-Up 1.800-4.000K (90 lm/W)	9
Down 1.800-4.000K Up RGB	C
Down 2.700K Up RGB	D
Down 3.000K Up RGB	T
Down 4.000K Up RGB	Q

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
ⓘ Custom RAL	

Code: 4 8

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB and CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | tuya | PUSH | DALI 2


▶ VIDEO

Dau E





*Finished luminaire. Includes power supply, spring clips, power cable and end caps.

Dau





*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.





Control accessories: page 327 | pages 326-333 | pages 334-335

Technical Information

Power	18W / 23W / 26W / 30W
Lumens	1.800 lm - 3.420 lm
Installation	Recessed and Surface / Pendant
Material	Aluminium 6063
PCB	Flex (Fine 61)

Code / Diffuser (Angle)		
Dau E	Opal (110°)	16
Dau	Opal (110°)	15

Size (Power)	
1.170mm (18W)	3
1.420mm (23W)	4
1.720mm (26W)	5
1.970mm (30W)	6

CCT (lm/W)	
2.700K (100 lm/W)	2
3.000K (105 lm/W)	3
4.000K (111 lm/W)	4
5.000K (114 lm/W)	5
RGB-W (100 lm/W)	8
2.700-5.500K (105 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	

Code:

CE RoHS EMC

Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | 2m Max | PUSH



Square







530 x 530mm



530 x 1.030mm

Equipment

455x47x28mm



*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	43W / 62W
Lumens	4.300 lm - 6.882 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 61)

Code		Diffuser (Angle)	
Code	3	Opal (110°)	3

Size (Power)	
530 x 530mm (43W)	4
530 x 1.030mm (62W)	8

CCT (lm/W)	
2.700K (100 lm/W)	2
3.000K (105 lm/W)	3
4.000K (111 lm/W)	4
RGB-W (100 lm/W)	8
2.700-5.500K (105 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Matt Gold	4
Silver	5
Custom RAL	

Code: 3 3

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | PUSH | DALI 2


2
1
▶ VIDEO

NEW

Zero Q





Equipment

Ø500x45mm



Ø400/700/1.000/1.400mm

Tolerance ±10%



*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	246W
Lumens	14.760 lm - 17.712 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code	Diffuser (Angle)	Size
Code **Z**	Opal (100°) **Q**	400+700+1.000+1.400mm **6**

CCT (lm/W)	
2.700K (60 lm/W)	**2**
3.000K (66 lm/W)	**3**
4.000K (72 lm/W)	**4**
2.700-5.500K (70 lm/W)	**9**

Driver	
On / Off	**1**
Dali / Push	**2**
Casambi	**4**
Tuya	**5**

Colour	
White (9003)	**1**
Black (9005)	**2**
ⓘ Matt Gold	**4**
ⓘ Silver	**5**
ⓘ Custom RAL	

Code: **Z** **Q** **6** _ _ _

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | tuya | DALI 2 PUSH

NEW

Zero D





Equipment







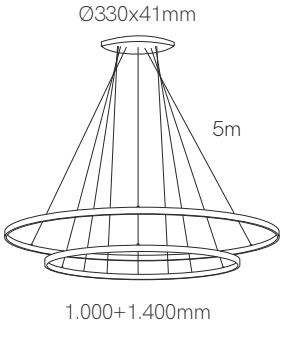

*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	78W / 120W / 180W
Lumens	4.680 lm - 12.960 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	Z	Opal (100°)	D	400+700mm	1	2.700K (60 lm/W)	2	On / Off	1	White (9003)	1
				700+1.000mm	2	3.000K (66 lm/W)	3	Dali / Push	2	Black (9005)	2
				1.000+1.400mm	3	4.000K (72 lm/W)	4	Casambi	4	ⓘ Matt Gold	4
						2.700-5.500K (70 lm/W)	9	Tuya	5	ⓘ Silver	5
										ⓘ Custom RAL	

Code: Z D

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | tuya | DALI 2 PUSH

NEW

Zero T





Equipment

Tolerance ±10%



Ø330x41mm



400+700+1.000mm

Ø280/500x41mm



700+1.000+1.400mm

*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	148W / 218W
Lumens	8.880 lm - 15.696 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	Z	Opal (100°)	T	400+700+1.000mm	4	2.700K (60 lm/W)	2	On / Off	1	White (9003)	1
				700+1.000+1.400mm	5	3.000K (66 lm/W)	3	Casambi	5	Black (9005)	2
						4.000K (72 lm/W)	4	Tuya	7	ⓘ Matt Gold	4
						2.700-5.500K (70 lm/W)	9	Dali / Push	8	ⓘ Silver	5
										ⓘ Custom RAL	

Code: Z T

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | tuya | DALI 2 PUSH


▶ VIDEO

Zero in XL







Equipment



*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	37W / 65W / 94W
Lumens	3.885 lm - 10.810 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 30)

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	9	Opal (100°)	1	400mm (37W)	1	2.700K (105 lm/W)	2	On / Off	1	White (9003)	1
				700mm (65W)	2	3.000K (110 lm/W)	3	Dali	2	Black (9005)	2
				1.000mm (94W)	9	4.000K (115 lm/W)	4	Push	3	Matt Gold	4
						RGB-W (60 lm/W)	7	Casambi	5	Silver	5
						2.700-5.500K (70 lm/W)	9	Tuya	7	Custom RAL	

Code: 9 1

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2

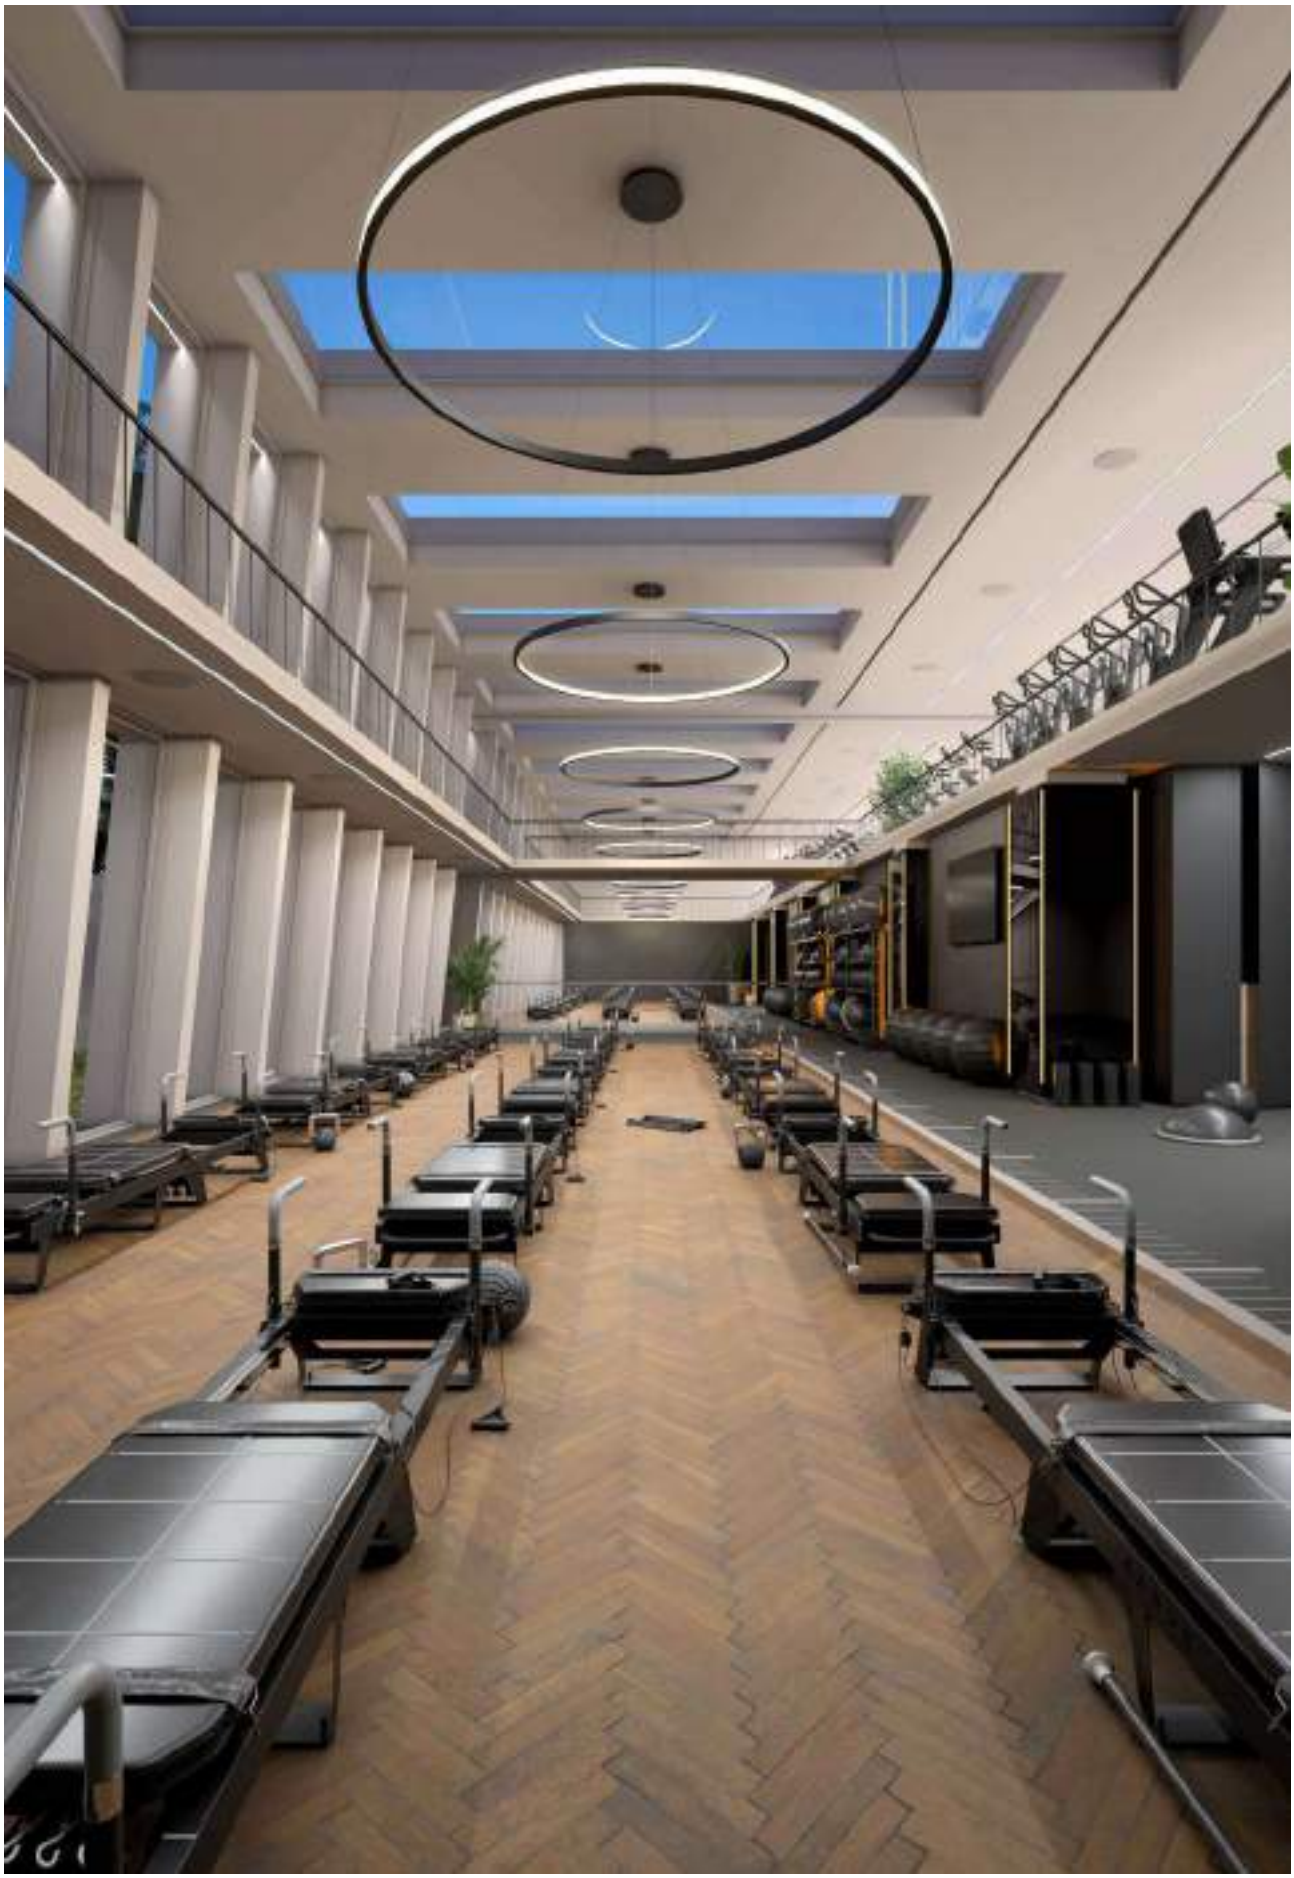

Zero out XL







Equipment



*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories: page 327 pages 326-333 pages 334-335

Technical Information

Power	37W / 65W / 94W
Lumens	3.885 lm - 10.810 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 30)

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	9	Opal (100°)	2	400mm (37W)	1	2.700K (105 lm/W)	2	On / Off	1	White (9003)	1
				700mm (65W)	2	3.000K (110 lm/W)	3	Dali	2	Black (9005)	2
				1.000mm (94W)	9	4.000K (115 lm/W)	4	Push	3	Matt Gold	4
						RGB-W (60 lm/W)	7	Casambi	5	Silver	5
						2.700-5.500K (70 lm/W)	9	Tuya	7	Custom RAL	

Code: 9 2

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2



Zero in

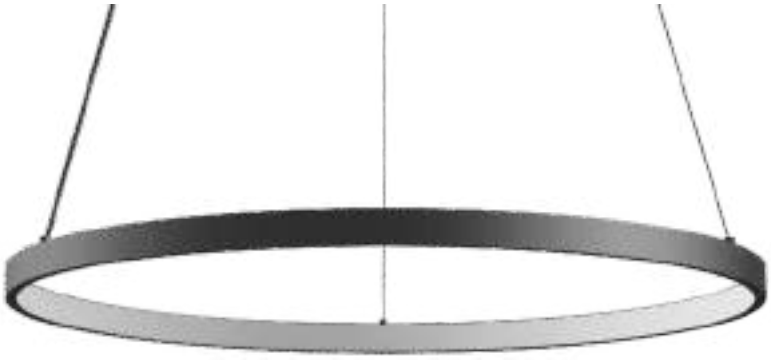



Ø400/700/1.000/1.400mm
Tolerance ±10%



Equipment

Ø250/280/330x41mm



*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	26W / 44W / 63W / 96W
Lumens	1.560 lm - 6.912 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	1	Opal (100°)	2	400mm (26W)	2	2.700K (60 lm/W)	2	On / Off	1	White (9003)	1
				700mm (44W)	4	3.000K (66 lm/W)	3	Dali	2	Black (9005)	2
				1.000mm (63W)	6	4.000K (72 lm/W)	4	Push	3	ⓘ Matt Gold	4
				ⓘ 1.400mm (96W)	8	RGB-W (50 lm/W)	8	Casambi	5	ⓘ Silver	5
						2.700-5.500K (70 lm/W)	9	Tuya	7	ⓘ Custom RAL	

Code: 1 2

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | tuya | PUSH | DALI 2



Zero out





Ø400/700/1.000/1.400mm
Tolerance ±10%



Equipment

Ø250/280/330x41mm



*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	26W / 44W / 63W / 96W
Lumens	1.560 lm - 6.912 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	1	Opal (100°)	4	400mm (26W)	2	2.700K (60 lm/W)	2	On / Off	1	White (9003)	1
				700mm (44W)	4	3.000K (66 lm/W)	3	Dali	2	Black (9005)	2
				1.000mm (63W)	6	4.000K (72 lm/W)	4	Push	3	ⓘ Matt Gold	4
				ⓘ 1.400mm (96W)	8	RGB-W (50 lm/W)	8	Casambi	5	ⓘ Silver	5
						2.700-5.500K (70 lm/W)	9	Tuya	7	ⓘ Custom RAL	

Code: 1 4

CE RoHS EAC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | tuya | PUSH | DALI 2



Circus in XL







Circus out XL



Equipment





*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Circus in XL

Circus out XL

Technical Information

Power	37W / 65W / 94W
Lumens	3.885 lm - 10.810 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 30)

Code	
Code	9

Diffuser (Angle)	
IN Opal (100°)	0
OUT Opal (100°)	8

Size (Power)	
400mm (37W)	2
700mm (65W)	4
1.000mm (94W)	6

CCT (lm/W)	
2.700K (105 lm/W)	2
3.000K (110 lm/W)	3
4.000K (115 lm/W)	4
RGB-W (60 lm/W)	7
2.700-5.500K (70 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Matt Gold	4
Silver	5
Custom RAL	

Code: 9

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2



Circus in



Circus out











*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Circus in

Circus out

Technical Information

Power	26W / 44W / 63W
Lumens	1.560 lm - 4.536 lm
Installation	Pendant
Material	Aluminium 6063
Material	Flex (Fine 56)

Code	
Code	1

Diffuser (Angle)	
IN Opal (100°)	0
OUT Opal (100°)	1

Size (Power)	
400mm (26W)	2
700mm (44W)	4
1.000mm (63W)	6

CCT (lm/W)	
2.700K (60 lm/W)	2
3.000K (66 lm/W)	3
4.000K (72 lm/W)	4
RGB-W (50 lm/W)	8
2.700-5.500K (70 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Matt Gold	4
Silver	5
Custom RAL	

Code: 1

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | tuya | PUSH | DALI 2





Tundra



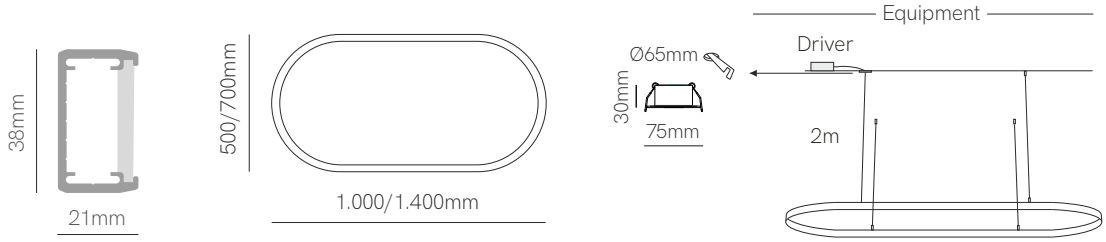

*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	77W / 112W
Lumens	8.085 lm - 12.880 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 30)

Code		Diffuser (Angle)		Size		CCT (lm/W)		Driver		Colour	
Code	8	Opal (100°)	6	500 x 1.000mm (77W)	4	2.700K (105 lm/W)	2	On / Off	1	White (9003)	1
				700 x 1.400mm (112W)	6	3.000K (110 lm/W)	3	Dali	2	Black (9005)	2
						4.000K (115 lm/W)	4	Push	3 ⓘ	Matt Gold	4
						RGB-W (60 lm/W)	8	Casambi	5 ⓘ	Silver	5
						2.700-5.500K (70 lm/W)	9	Tuya	7 ⓘ	Custom RAL	

Code: 8 6

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2



Zero direct XL



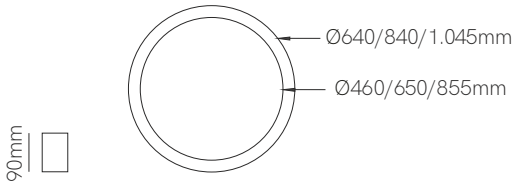

*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	78W / 105W / 131W
Lumens	5.382 lm - 10.349 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	1	Opal (100°)	3	640mm (78W)	2	2.700K (69 lm/W)	2	On / Off	1	○ White (9003)	1
				840mm (105W)	5	3.000K (75 lm/W)	3	Dali	2	● Black (9005)	2
				1.045mm (131W)	6	4.000K (79 lm/W)	4	Push	3		
								Casambi	5		

Code: 1 3

CE RoHS EMC

*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2



Zero direct





Ø520/800/1.200/1.500/3.000mm

Tolerance ±10%



Equipment

Ø250/280x41mm



Ø520/800/1.200/1.500mm

Ø80x29mm



Ø3.000mm

*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories: tuya page 327 pages 326-333 DALI pages 334-335

Technical Information

Power	35W / 55W / 75W / 94W / 189W
Lumens	2.310 lm - 14.742 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code		Diffuser (Angle)	
Code	1	Opal (100°)	7

Size (Power)	
520mm (35W)	0
800mm (55W)	2
1.200mm (75W)	6
1.500mm (94W)	8
3.000mm (189W)	9
Custom	C

CCT (lm/W)	
2.700K (66 lm/W)	2
3.000K (72 lm/W)	3
4.000K (78 lm/W)	4
2.700-5.500K (70 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Matt Gold	4
Silver	5
Custom RAL	

Code: 1 7

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | tuya | PUSH | DALI 2

Zero design

Zero 45°

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W) - Power/m		Voltage		Colour	
Code	Z	Opal (100°)	1	800mm (7W)	1	2.700K (66 lm/w) - 22W/m	2	24VDC	0	White (9003)	1
				1.500mm (13W)	4	3.000K (72 lm/w) - 22W/m	3			Black (9005)	2
				3.000mm (26W)	7	4.000K (78 lm/w) - 22W/m	4			ⓘ Matt Gold	4
						CCT (70 lm/w) - 22W/m	9			ⓘ Silver	5
										ⓘ Custom RAL	

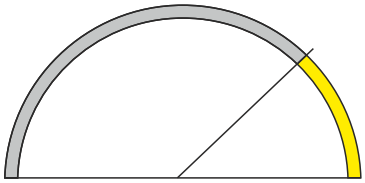

800 - 1.500 - 3.000mm
Tolerance ±10%

Code: Z 1 0

Zero 90°

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W) - Power/m		Voltage		Colour	
Code	Z	Opal (100°)	1	800mm (14W)	2	2.700K (66 lm/w) - 22W/m	2	24VDC	0	White (9003)	1
				1.500mm (26W)	5	3.000K (72 lm/w) - 22W/m	3			Black (9005)	2
						4.000K (78 lm/w) - 22W/m	4			ⓘ Matt Gold	4
						CCT (70 lm/w) - 22W/m	9			ⓘ Silver	5
										ⓘ Custom RAL	

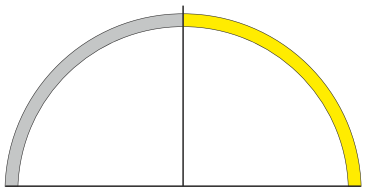

800 - 1.500mm
Tolerance ±10%

Code: Z 1 0

ⓘ Consult delivery terms and conditions.
*Create your luminaire acording to your preferences.

CE RoHS

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | CRI ≥80 | 160 LED/m | 24 VDC

Zero 180°

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W) - Power/m		Voltage		Colour	
Code	**Z**	Opal (100°)	**1**	800mm (28W)	**8**	2.700K (66 lm/w) - 22W/m	**2**	24VDC	**0**	White (9003)	**1**
				1.500mm (52W)	**9**	3.000K (72 lm/w) - 22W/m	**3**			Black (9005)	**2**
						4.000K (78 lm/w) - 22W/m	**4**			ⓘ Matt Gold	**4**
						CCT (70 lm/w) - 22W/m	**9**			ⓘ Silver	**5**
										ⓘ Custom RAL	

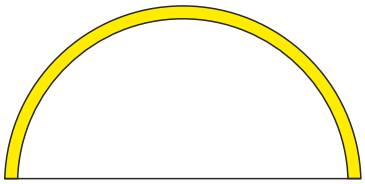

800 - 1.500mm
Tolerance ±10%

Code: **Z** **1** **0**

Zero line

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W) - Power/m		Voltage		Colour	
Code	**Z**	Opal (100°)	**1**	2.500mm (55W)	**0**	2.700K (66 lm/w) - 22W/m	**2**	24VDC	**0**	White (9003)	**1**
						3.000K (72 lm/w) - 22W/m	**3**			Black (9005)	**2**
						4.000K (78 lm/w) - 22W/m	**4**			ⓘ Matt Gold	**4**
						CCT (70 lm/w) - 22W/m	**9**			ⓘ Silver	**5**
										ⓘ Custom RAL	



2.500mm

Code: **Z** **1** **0**



ⓘ On demand.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver Casambi and Tuya..

Accessories (pages 176-179)



End Cap
- 40631
- 40632
- 40634
- 40635



Suspension Kit Metallic (2m)
- 34720
- 34721
- 34722



Ceiling suspension
- 40430



Kit Joint Metallic
- 40490
- 40491
- 40492



Power supplies (pages 340-341)

CE RoHS

Control accessories pages 294-307.

ⓘ Consult delivery terms and conditions.

*Create your luminaire acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | CRI ≥80 | 160 LED/m | 24 VDC | Zero line 3,37m Max









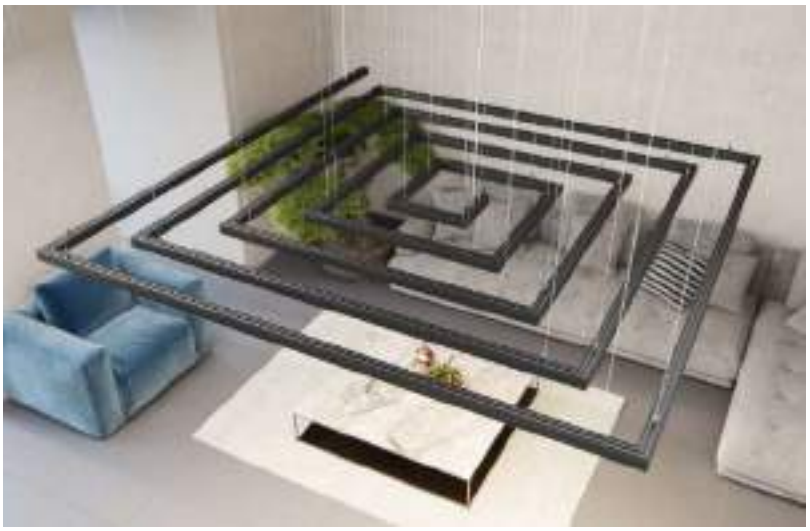



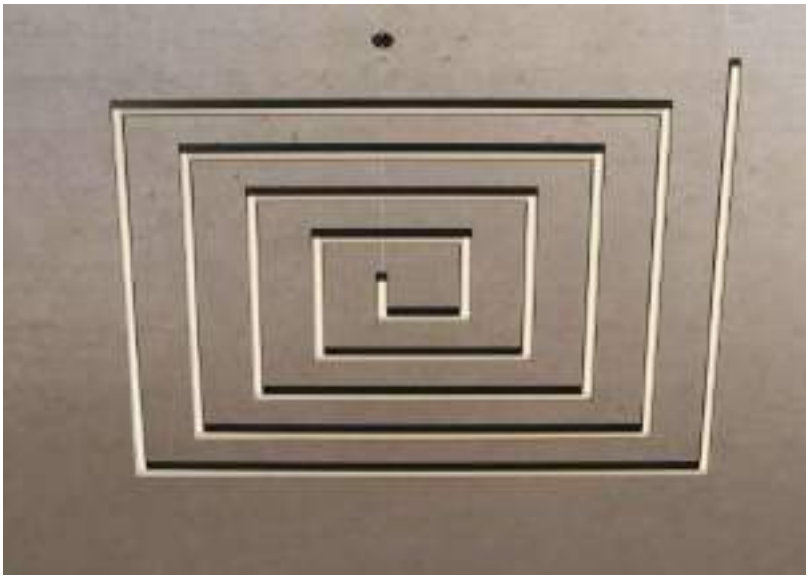


▶ VIDEO

Kaa



Equipment

Ø330mm x41mm



*Finished luminaire. Includes power supply, suspension kit, power cable and end caps.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	90W / 180W / 300W
Lumens	5.400 lm - 21.900 lm
Installation	Surface
Material	Aluminium and silicone

Code	
Code	76

Size (Power)	
3 x 1.500mm (90W)	1
3 x 3.000mm (180W)	3
3 x 5.000mm (300W)	5

CCT (lm/W)	
2.400K (60 lm/W)	2
2.700K (65 lm/W)	3
3.000K (69 lm/W)	4
4.000K (73 lm/W)	5
RGB (41 lm/W)	8
2.700-4.200K (55 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour	
White (9003)	1
Black (9005)	2
Custom RAL	

Code: 76

Included accessories

Suspension kit 2m



1 x 3
3 x 6
5 x 9

+ Clip



1 x 3
3 x 6
5 x 9

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-4.200K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 360° | 2,5m Max | tuya | PUSH | DALI



Connecta Fisioteràpia i Salut, Barcelona (Spain).

Kaa line



Equipment

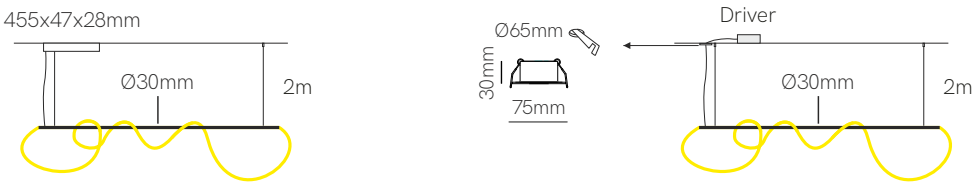

*Finished luminaire. Includes power supply, suspension kit and power.

Control accessories: tuya page 327 | pages 326-333 | DALI pages 334-335

Technical Information

Power	30W / 60W / 100W
Lumens	1.800 lm - 7.300 lm
Installation	Pendant
Material	Aluminium and silicone

Code	
Kaa line surface	70
Kaa line recessed	74

Size: Stick + Led (Power)	
1.000 + 1.500mm (30W)	1
1.600 + 3.000mm (60W)	3
2.500 + 5.000mm (100W)	5

CCT (lm/W)	
2.400K (60 lm/W)	2
2.700K (65 lm/W)	3
3.000K (69 lm/W)	4
4.000K (73 lm/W)	5
RGB (41 lm/W)	8
2.700-4.200K (55 lm/W)	9

Driver	
On / Off	1
Dali	2
Push	3
Casambi	5
Tuya	7

Colour (stick)	
White (9003)	1
Black (9005)	2
Matt Gold	3
Custom RAL	

Code: _____

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-4.200K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 360° | 2,5m Max | tuya | PUSH | DALI



Horizon



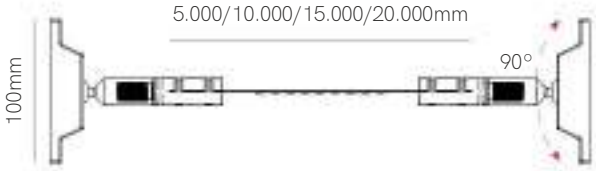

Equipment





Compatible profiles.



Technical Information

Max. power	48W - 288W
Lumens	4.560 lm - 28.800 lm
Installation	Pendant
Material	Aluminium 6063
Material	Flex

Code		Led		Size		CCT (lm/W) - Power/m		Driver		Colour	
Code	2	9,6W/m (Fine 51)	5	5.000mm	1	2.700K (95 lm/W)	2	On / Off	1	White (9003)	1
		14,4W/m (Fine 41)	7	10.000mm	2	3.000K (98 lm/W)	3			Black (9005)	2
				15.000mm	3	4.000K (100 lm/W)	4				

Code: 2 1

Accessories



2 holder
- HRZ-01
- HRZ-02



1m steel band (max. 25m)
- HRZ-PLE-01
- HRZ-PLE-02

CE RoHS

*Led strip and power supply included.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 24 VDC | PF >0,9 | CRI ≥90 | 20m Max


4F

Lift





Lift wall





Equipment



Pendant



Wall

*Finished luminaire.
Includes power cable and end caps.

Control accessories: page 327 | pages 326-333 | pages 334-335

Technical Information

Power	33W / 42W / 51W / 59W - 16W / 27W / 35W	Material	Aluminium and polycarbonate
Lumens	1.980 lm - 9.440 lm / 1.600 lm - 3.850 lm	PCB	Pendant: Rigid / Wall: Flex
Installation	Pendant / Wall		

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Pendant	6	Opal (135°)	6	1.130mm (33W)	3	2.700K (150 lm/W)	2	On / Off	1	White (9003)	1
				1.420mm (42W)	4	3.000K (155 lm/W)	3	Dali	2	Black (9005)	2
				1.700mm (51W)	5	4.000K (160 lm/W)	4	Push	3		
				1.970mm (59W)	6	RGB-W (60 lm/W)	8	Casambi	5		
						2.700-5.500K (100 lm/W)	9	Tuya	7		

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Wall	6	Opal (135°)	0	520mm (16W)	1	2.700K (100 lm/W)	2	On / Off	1	White (9003)	1
				895mm (27W)	2	3.000K (105 lm/W)	3			Black (9005)	2
				1.145mm (35W)	3	4.000K (110 lm/W)	4				

Code: 6

CE RoHS

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | PUSH | DALI 2



Flash





*Finished luminaire. Includes spring clips and end caps.

Technical Information

Power	16W / 27W / 35W / 46W / 55W
Lumens	1.600 lm - 6.050 lm
Installation	Wall
Material	Aluminium 6063
PCB	Flex (Fine 32)

Code		Diffuser		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	3	Transparent (90°)	9	520mm (16W)	1	2.700K (100 lm/W)	2	On / Off	1	White (9003)	1
				895mm (27W)	2	3.000K (105 lm/W)	3			Black (9005)	2
				1.145mm (35W)	3	4.000K (110 lm/W)	4			Aluminium	9
				1.520mm (46W)	5	6.000K (110 lm/W)	6			ⓘ Custom RAL	
				1.825mm (55W)	6						

Code: 3 9 1

CE RoHS EMC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

3 YEARS WARRANTY | 35.000 HOURS | 230 VAC | IP 20 | CRI ≥80 | 2m Max | TRIAC DIMM



Triton





Installation



*Finished luminaire. Includes power supply, clip rotable, 2mts power cable and end caps.

Control accessories: DALI pages 334-335

Technical Information

Power	21W / 41W / 61W
Lumens	2.625 lm - 8.235 lm
Installation	Surface
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	4	Asymmetric (15°/35°)	9	420mm (21W)	1	2.700K (125 lm/W)	2	On / Off	1	Black (9005)	2
				820mm (41W)	2	3.000K (130 lm/W)	3	Dali	2	ⓘ Custom RAL	
				1.220mm (61W)	3	4.000K (135 lm/W)	4				

Code: 4 9 2

Accessories



Linear Joint IP68
Ø26x95mm
5671



T Joint IP68
74x118mm
5672



X Joint IP68
122x122mm
5673

CE RoHS EMC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 230 VAC | PF >0,9 | CRI ≥80 | DALI 2





Triton down





*Finished luminaire. Includes power supply, 2mts power cable and end caps.

Control accessories: DALI pages 334-335

Technical Information

Power	46W / 57W / 69W / 80W / 103W
Lumens	5.152 lm - 14.008 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Rigid

Code		Diffuser (Angle)		Size (Power)		CCT (lm/W)		Driver		Colour	
Code	4	Opal (80°)	6	1.130mm (46W)	3	2.700K (112 lm/W)	2	On / Off	1	White (9003)	1
				1.410mm (57W)	4	3.000K (128 lm/W)	3	Dali	2	Black (9005)	2
				1.690mm (69W)	5	4.000K (136 lm/W)	4			Custom RAL	
				1.970mm (80W)	6	5.500K (136 lm/W)	5				
				2.530mm (103W)	7						

Code: 4 6

Consult delivery terms and conditions.

*Create your code acording to your preferences.

Accessories



Wall bracket
☐ 40531
■ 40532



Ceiling suspension
■ 40510



Suspension Kit
■ 40520 (2m)



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 230 VAC | PF >0,9 | CRI ≥95 | DALI 2

Custom system accessories

Time

End caps
- ☐ 40741
- ■ 40742
- ☐ 40743

End caps
- ☐ 40751
- ■ 40752
- ☐ 40753



Joint 180°
- ■ 40770



Joint 90°
- ■ 40990



Joint 90°
- ■ 40410



Joint 120°
- ■ 40666



Wall bracket
- ☐ 40851
- ■ 40852
- ☐ 40853



Trimless
- ■ 40339

Urban

End caps
- ☐ 40721
- ■ 40722
- ☐ 40723

End caps
- ☐ 40731
- ■ 40732
- ☐ 40733



Joint 180°
- ■ 40220



Joint 90°
- ■ 40550



Joint 90°
- ■ 40610



Joint 120°
- ■ 40999



Wall bracket
- ☐ 40851
- ■ 40852
- ☐ 40853



Trimless
- ■ 40669



Ceiling suspension
- ● 40780



Suspension kit
- ● 40790 (2m)
- ● 40795 (5m)

Dual



Joint 180°
- ■ 40420



Joint 90°
- ■ 40810

Zero Design



End Cap
- ☐ 40631
- ■ 40632
- ■ 40634
- ■ 40635



Suspension Kit Metallic (2m)
- ● 34720
- ○ 34721
- ● 34722



Ceiling suspension
- ■ 40430



Kit Joint Metallic
- ■ 40490
- ☐ 40491
- ■ 40492

Time / Urban



Surface base
3x0,75 (2,5m)
Ø60x28mm
- ○ 40881
- ● 40882
- ● 40883

Surface base
5x0,5 (2,5m)
Ø60x28mm
- ○ 40991
- ● 40992
- ● 40993

Surface base
3x0,75 (5m)
Ø60x28mm
- ○ 40581
- ● 40582
- ● 40583

Surface base
5x0,5 (5m)
Ø60x28mm
- ○ 40591
- ● 40592
- ● 40593



Recessed base
3x0,75 (2,5m)
Ø75x30mm
- ○ 40831
- ● 40832
- ● 40833

Recessed base
5x0,5 (2,5m)
Ø75x30mm
- ○ 40931
- ● 40932
- ● 40933

Recessed base
3x0,75 (5m)
Ø75x30mm
- ○ 40481
- ● 40482
- ● 40483

Recessed base
Base 5x0,5 (5m)
Ø75x30mm
- ○ 40541
- ● 40542
- ● 40543

Pendant lamp accessories NEW

Surface base
Ø60x30mm



○ 40191



● 40192



○ 40193

Recessed base
Ø75x30mm Cut Ø65mm



○ 40171



● 40172



○ 40173

Ceiling cable support
Ø20x45mm



○ 40201



● 40202



○ 40209

Wall cable support
Ø60x30mm



○ 40901



● 40902



○ 40909

Textile cable
3x0,75mm



○ TXT-03



● TXT-05



● TXT-08



● TXT-09



● TXT-012



● TXT-18



● TXT-20



● TXT-24



● TXT-37

Zero Design



Base Ø330x41mm

○	Z12411	● Z12412	240W/24VDC ON/OFF
○	Z12421	● Z12422	200W/24VDC DALI
○	Z12431	● Z12432	240W/24VDC PUSH
○	Z12451	● Z12452	240W/24VDC CASAMBI
○	Z12471	● Z12472	240W/24VDC TUYA



Base Ø280x41mm

○	Z11511	● Z11512	150W/24VDC ON/OFF
○	Z11521	● Z11522	120W/24VDC DALI
○	Z11531	● Z11532	150W/24VDC PUSH
○	Z11551	● Z11552	150W/24VDC CASAMBI
○	Z11571	● Z11572	150W/24VDC TUYA



Base Ø250x41mm

○	Z11011	● Z11012	75W/24VDC ON/OFF
○	Z11021	● Z11022	75W/24VDC DALI
○	Z11031	● Z11032	75W/24VDC PUSH
○	Z11051	● Z11052	75W/24VDC CASAMBI
○	Z11071	● Z11072	75W/24VDC TUYA

Power supplies linear box



Base 455x47x28mm

□	35331	■ 35332	30W/24VDC on/off
□	35361	■ 35362	60W/24VDC on/off
□	35311	■ 35312	100W/24VDC on/off
□	35351	■ 35352	150W/24VDC on/off
□	35731	■ 35732	30W/24VDC dali
□	35761	■ 35762	60W/24VDC dali
□	35711	■ 35712	100W/24VDC dali
□	35751	■ 35752	150W/24VDC dali

Emergency NEW

1. 2.
3. 4.





Recessed LED emergency light

	Code	Battery (LiFeP04)	Led CCT	Autonomy	Corridor (C)	Driver size	Size
1.	K25411 ○	3,2V / 1,5-1,8Ah	4.000K	1 hour	200 lm	200x24x20mm	Ø37x26mm Cut Ø32mm
2.	K25412 ●	3,2V / 1,5-1,8Ah	4.000K	1 hour	200 lm	200x24x20mm	Ø37x26mm Cut Ø32mm
3.	K25431 ○	3,2V / 1,5-1,8Ah	4.000K	3 hours	200 lm	200x24x20mm	Ø37x26mm Cut Ø32mm
4.	K25432 ●	3,2V / 1,5-1,8Ah	4.000K	3 hours	200 lm	200x24x20mm	Ø37x26mm Cut Ø32mm

1. 2.





Surface LED emergency light

	Code	Battery (LiFeP04)	Led CCT	Autonomy	Open Area (O)	Corridor (C)	Asymmetric	Size
1.	K25731 □	3,2V / 1,5Ah	6.000/7.000K	3 hours	150 lm	228 lm	113 lm	125x125x31mm
2.	K25732 ■	3,2V / 1,5Ah	6.000/7.000K	3 hours	150 lm	150 lm	113 lm	125x125x31mm



Emergency LED conversion kit

	Code	Battery (Li-Ion)	Output voltage	Output power	Autonomy	Size
1.	K25183 □	7,26V / 3,4Ah	10-300 VDC	9W	1 hour	260x22x30mm
2.	K25189 □	14,52V / 3,4Ah	20-300 VDC	18W	1 hour	410x22x30mm



Emergency LED conversion kit

	Code	Battery (Li-Ion)	Output voltage	Output power	Autonomy	Driver size	Battery size
1.	K25619 □	10,8-5Ah	Automatically adjusted	8-36W	1 hour	160x38x29mm	230x22x23mm
2.	K25639 □	10,8-5Ah	Automatically adjusted	8-36W	3 hours	410x22x30mm	230x43x23mm

CE RoHS

3 YEARS WARRANTY | IP 20



Profiles

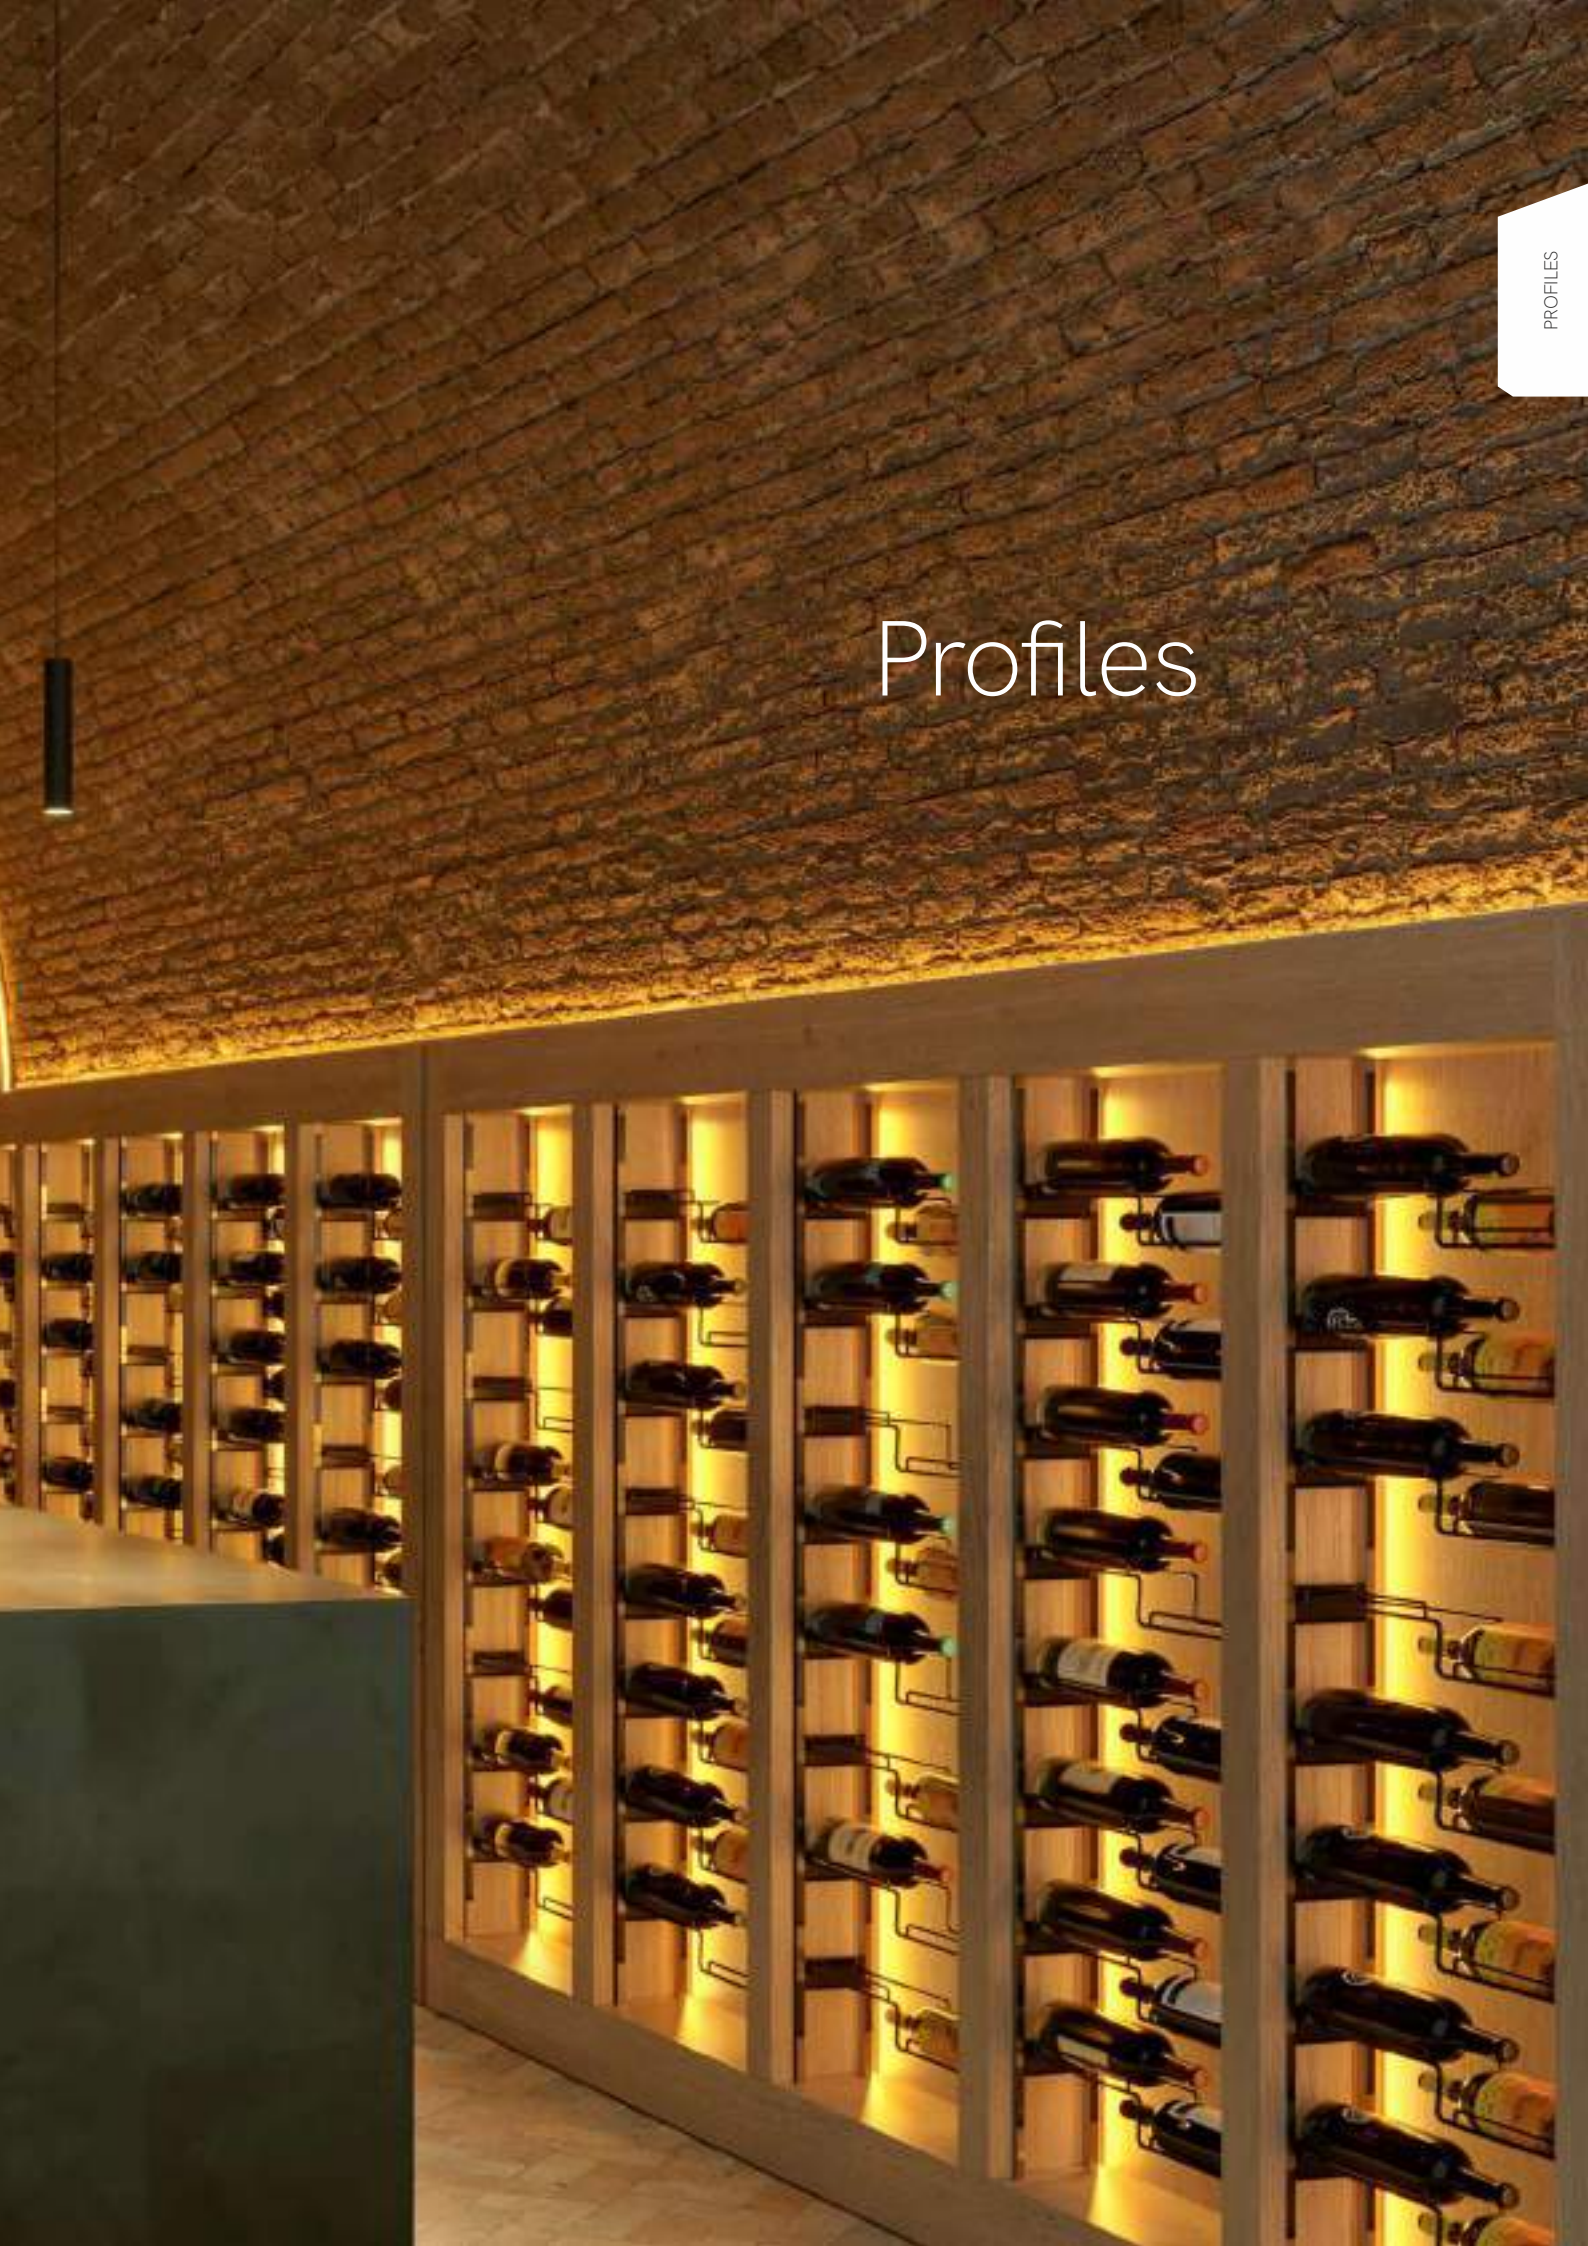

	Model	Page	Section Size	Installation
	BOX 10	204	35x25 mm	Recessed
	BOX 11	202	16x15 mm	Recessed
	BOX 12	202	10x15 mm	Surface
	BOX 13	203	17,9x5,7 mm	Surface / Flex
	BOX 14	198	16x16 mm	Surface / Corner
	BOX 15	189	25x7 mm	Recessed
	BOX 16	189	17,3x7 mm	Surface
	BOX 17	190	25x14,5mm	Recessed
	BOX 18	190	17,3x14,5 mm	Surface
	BOX 19	204	25x25 mm	Surface / Pendant
	BOX 21	216	26,2x76,2 mm	Recessed
	BOX 22	212	17,8x48,6 mm	Surface
	BOX 23	191	23x10,8 mm	Surface
	BOX 24	207	29,5x17,4 mm	Recessed
	BOX 27	217	17,7x43,5 mm	Surface
	BOX 28	223	18x22,2 mm	Surface
	BOX 29	225	21x26mm	Recessed
	BOX 30	227	12x2 mm / 20x2mm	Surface
	BOX 32	211	35,9x14 mm	Trimless
	BOX 33	213	29,4x50 mm	Surface
NEW	BOX 34	186	Ø62 mm	Surface / Pendant
	BOX 35	197	35x35 mm	Surface / Pendant

Max Power	IP	Standard finishes	Standard Size
25W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	Alum.	2m
15W MAX	20 IP	Alum.	2m
15W MAX	20 IP	Alum.	2m
15W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m / 4m
20W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m / 4m
25W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	White Alum.	2m
2x15W MAX	20 IP	Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	White Black Alum.	2m
40W MAX	20 IP	Alum.	2m
25W MAX	55 IP	Alum.	2m
20W MAX 40W MAX	20 IP	Alum.	2m
20W MAX	20 IP	White	2m
20W MAX	20 IP	White Black Alum.	2m
30W MAX	20 IP	Alum.	2m
40W MAX	20 IP	White Black Alum.	2m

	Model	Page	Section Size	Installation	
	BOX 37	205	79x32 mm		Trimless
	BOX 38	197	50x35 mm		Recessed
	BOX 39	222	Ø28 mm		Surface / Pendant
NEW	BOX 41	187	30x35 mm		Surface / Pendant
	BOX 43	194	18,5x11,8 mm		Surface
	BOX 53	191	30,5x10,8mm		Recessed
NEW	BOX 57	186	Ø40 mm		Surface / Pendant
	BOX 60	199	20x16 mm		Surface / Corner
	BOX 65	219	15x80 mm		Surface / Skirting
	BOX 67	221	65x28 mm		Surface / Stairs
	BOX 68	211	60x13 mm		Trimless
	BOX 69	209	56,4x13,3 mm		Trimless
	BOX 71	198	18,4x18,4 mm		Surface / Corner
	BOX 73	226	21x21 mm		Surface
	BOX 74	194	26,5x12,5 mm		Recessed
	BOX 75	195	16x24,5 mm		Surface / Pendant
	BOX 87	193	12,5x8,7 mm		Recessed
NEW	BOX 89	187	35x61,7 mm		Surface / Pendant
	BOX 92	193	18,7x10,5 mm		Recessed
	BOX 95	195	23,25x22 mm		Recessed
	BOX 98 railing	215	78,8x95 mm		Surface / Railing
	BOX 99	201	10x12 mm		Surface / Pendant

Max Power	IP	Standard finishes	Standard Size
40W MAX	40 IP	White	2m
40W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	Black	2m
30W MAX	20 IP	White Black	2m
25W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
22W MAX	20 IP	Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
12W MAX	20 IP	White Black Alum.	2m
12W MAX	20 IP	Black	2m
20W MAX	20 IP	White Black	2m
15W MAX	20 IP	Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	White Alum.	2m
30W MAX	20 IP	White Black	2m
15W MAX	20 IP	Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
30W MAX	20 IP	White Black	2m
20W MAX	20 IP	White Black	2m

NEW

Box 34





*Useful area: 25x12mm.



Box 57





*Useful area: 15x12mm.



Box 34

Box 57

Compatible led strips.



Technical Information

	Box 34	Box 57
Max. power	30W/m	22W/m
Installation	Surface / Pendant	Surface / Pendant
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Diffuser	Opal PC 80%	Opal PC 80%
Finishes	Aluminium	Aluminium
Code	34121	57121

Consult delivery terms and conditions.

Box 34 accessories



End Cap

- 34621
- 34622
- 34623



Suspension Kit Metallic (2m)

- 34720
- 34721
- 34722

Box 57 accessories



End Cap

- 57621
- 57622
- 57623



Suspension Kit Metallic (2m)

- 34720
- 34721
- 34722



Ceiling suspension

- 40555

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max

NEW

Box 41





*Useful area: 15x5mm.



60°

Box 89





*Useful area: 20x12mm.



110°

Compatible led strips.



Box 41 Box 89

Technical Information

	Box 41	Box 89
Max. power	30W/m	30W/m
Installation	Surface / Pendant	Surface / Pendant
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black	White / Black
Code	☐ 41121	☐ 89121
	■ 41122	■ 89122
	Custom RAL	Custom RAL

Consult delivery terms and conditions.

Box 41 accessories



Diffuser PC Opal 80°
41440



Diffuser PC Prismatic 83°
41450



Diffuser PC Low glare black
41472

End Cap
☐ 41621
■ 41622



Clip Metallic
41330



Suspension Kit Metallic (2m)
41780
41781
41782

Box 89 accessories



Diffuser PC Opal 135°
89440



End Cap
☐ 89621
■ 89622



Clip Metallic
89330



Suspension Kit Metallic (2m)
34720
34721
34722

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max



Box 15





*Useful area: 12x5mm.



Box 16





*Useful area: 12x5mm.



Compatible led strips.



Box 15 Box 16

Technical Information

	Box 15	Box 16
Max. power	20W/m	20W/m
Installation	Recessed	Surface
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 15	Box 16
	☐ 15121	☐ 16121
	■ 15122	■ 16122
	▩ 15119	▩ 16119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories



Diffuser PC Transp. 90%
☐ 20450

Diffuser PC Opal 70%
▩ 20440



Diffuser PC Black 50%
■ 20472



Diffuser Silicone Opal 60% (max. 60m)
◯ 20469
◯ 20469-15

Box 15 accessories



End Cap
☐ 15631
■ 15632
▩ 15633



End Cap
☐ 15621
■ 15622
▩ 15623

Box 16 accessories



End Cap
☐ 16631
■ 16632
▩ 16633



End Cap
☐ 16621
■ 16622
▩ 16623



Clip Metallic
▩ 20330



Clip Rotable Metallic
▩ 20350

Clip PC
☐ 20380
■ 20382

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max

Box 17



18mm x L

*Useful area: 12x10mm.





65°

Box 17

Box 18







*Useful area: 12x10mm.



65°



60°

Box 18

Compatible led strips.



Technical Information

	Box 17	Box 18
Max. power	20W/m	20W/m
Installation	Recessed	Surface
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 17	Box 18
	☐ 17121	☐ 18121
	■ 17122	■ 18122
	▩ 17119	▩ 18119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories



Diffuser PC Transp. 90%
☐ 20450

Diffuser PC Opal 70%
▩ 20440



Diffuser PC Black 50%
■ 20472



Diffuser Silicone Opal 60% (max. 60m)
○ 20469
○ 20469-15

Box 17 accessories



End Cap
☐ 17631
■ 17632
▩ 17633



End Cap
☐ 17621
■ 17622
▩ 17623

Box 18 accessories



End Cap
☐ 18631
■ 18632
▩ 18633



End Cap
☐ 18621
■ 18622
▩ 18623



Clip Metallic
▩ 20330



Clip Rotable Metallic
▩ 20350

Clip PC
▩ 20380
■ 20382



End Cap 60°
☐ 18651
■ 18652
▩ 18653



End Cap 60°
☐ 18661
■ 18662
▩ 18663



Diffuser PC Optic 60° Transp. 90%
☐ 20430

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max

Box 53



25mm x L



*Useful area: 20x6mm.



115°

Box 23





*Useful area: 20x6mm.



115°

Compatible led strips.



Box 53 Box 23

Technical Information

	Box 53	Box 23
Max. power	25W/m	25W/m
Installation	Recessed	Surface
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 53	Box 23
	☐ 53121	☐ 23121
	■ 53122	■ 23122
	☐ 53119	☐ 23119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories

Diffuser PC Opal 70%
☐ 23480

Box 53 accessories



End Cap
☐ 53631
■ 53632
☐ 53633



End Cap
☐ 53621
■ 53622
☐ 53623

Box 23 accessories

End Cap
☐ 23631
■ 23632
☐ 23633

End Cap
☐ 23621
■ 23622
☐ 23623

Clip PC
☐ 23380

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max


MILAN
MADE IN GERMANY
STAEDTLER

Box 87



11mm x L



*Useful area: 5x2,5mm.



70°

Box 92



14,5mm x L



*Useful area: 12x3mm.



95°

Compatible led strips.



Box 87 Box 92

Technical Information

	Box 87	Box 92
Max. power	15W/m	15W/m
Installation	Recessed	Recessed
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	Black / Aluminium	Aluminium
Code	■ 87122	□ 92119
	□ 87119	ⓘ Custom RAL
	ⓘ Custom RAL	

ⓘ Consult delivery terms and conditions.

Box 87 accessories



Diffuser PC Opal 70%
□ 87440



Diffuser PC Black 50%
■ 87520



End Cap
■ 87632
□ 87633



End Cap
■ 87622
□ 87623



Clip Metallic
■ 87330

Box 92 accessories

Diffuser PC Opal 70%
□ 92440



End Cap
□ 92633



End Cap
□ 92623



Clip Metallic
■ 92330

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max

Box 74



24mm x L



*Useful area: 16x6mm.



85°

Box 74

Box 43





*Useful area: 14x5mm.



90°

Box 43

Compatible led strips.



Technical Information

	Box 74	Box 43
Max. power	25W/m	25W/m
Installation	Recessed	Surface
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 74	Box 43
	74121	43121
	74122	43122
	74119	43119
	Custom RAL	Custom RAL

Consult delivery terms and conditions.

Common accessories

Diffuser PC Opal 70%
43440

Box 74 accessories



End Cap
74631
74632
74633



End Cap
74621
74622
74623

Box 43 accessories

End Cap
43631
43632
43633

End Cap
43621
43622
43623



Clip Metallic
43330



Clip 45° Metallic
43530

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max

Box 95





21mm x L

*Useful area: 12x3mm.





Box 75





*Useful area: 12x3mm.



Compatible led strips.



Box 95 Box 75

Technical Information

	Box 95	Box 75
Max. power	22W/m	15W/m
Installation	Recessed	Surface / Pendant
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 95	Box 75
	☐ 95121	☐ 75121
	■ 95122	■ 75122
	▩ 95119	▩ 75119
	Custom RAL	Custom RAL

Consult delivery terms and conditions.

Common accessories



Opal Prismatic
☐ 75440

Box 95 accessories



End Cap
☐ 95631
■ 95632
▩ 95633



End Cap
☐ 95621
■ 95622
▩ 95623



Clip Metallic
▩ 24710

Box 75 accessories



End Cap
☐ 75621
■ 75622
▩ 75623



Hanging bracket Metallic
▩ 75330



Suspension Kit Metallic
● 20720 (2m)

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max



Box 38







*Useful area: 23x20mm.

Box 35







*Useful area: 23x20mm.

Compatible led strips.



Box 38 

Box 35 

Technical Information

	Box 38	Box 35
Max. power	40W/m	40W/m
Installation	Recessed	Surface / Pendant
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 38	Box 35
	☐ 38121	☐ 35121
	■ 38122	■ 35122
	▢ 38119	▢ 35119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories



Diffuser PC Transp. 90%
☐ 20750

Diffuser PC Opal 70%
▢ 20700



Diffuser PC Black 50%
■ 20772

Joint 180° Metallic
▢ 20520



Joint 90° Metallic
▢ 20510



Joint 90° Metallic
▢ 20540

Joint 120° Metallic
▢ 20530

Box 38 accessories



End Cap
☐ 38621
■ 38622
▢ 38623



Spring Clip Metallic
▢ 20710

Box 35 accessories



End Cap
☐ 35621
■ 35622
▢ 35623



Clip Metallic
▢ 35330



Suspension Kit Metallic
● 20720 (2m)



Base 455x47x28mm

☐ 35331	■ 35332	30W/24VDC on/off
☐ 35361	■ 35362	60W/24VDC on/off
☐ 35311	■ 35312	100W/24VDC on/off
☐ 35351	■ 35352	150W/24VDC on/off
☐ 35731	■ 35732	30W/24VDC dali
☐ 35761	■ 35762	60W/24VDC dali
☐ 35711	■ 35712	100W/24VDC dali
☐ 35751	■ 35752	150W/24VDC dali

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max

Box 14





*Useful area: 10x5mm.



Box 71





*Useful area: 14x5mm.



Box 14

Box 71

Compatible led strips.

Technical Information

	Box 14	Box 71
Max. power	15W/m	22W/m
Installation	Surface / corner	Surface / corner
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium
Code	14121	71121
	14122	71122
	14119	71119
	Custom RAL	Custom RAL

Consult delivery terms and conditions.

Box 14 accessories

Diffuser PC Opal 70%
14480



End Cap
14631
14632
14633



End Cap
14621
14622
14623



Clip Metallic
14330

Box 71 accessories

Diffuser PC Opal 70%
71440



End Cap
71631
71632
71633



End Cap
71621
71622
71623



Clip Metallic
71330

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max

Box 60





*Useful area: 12x3mm.







Compatible led strips.



Technical Information

Max. power	20W/m
Installation	Surface / corner
Material	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium

Code	
	60121
	60122
	60119
	Custom RAL

Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
60440



End Cap left
60631
60632
60633



End Cap right
60621
60622
60623



Clip Metallic
60330

CE RoHS

3 YEARS WARRANTY | IP 20 | 30°-60° | 2m Max





Box 99







*Useful area: 8x3mm.

Compatible led strips.



Technical Information

Max. power	20W/m
Installation	Surface / Pendant
Material	Aluminium 6063 / 6060
Finishes	White / Black

Code	
	☐ 99121
	■ 99122
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
☐ 99440



End Cap
☐ 99621
■ 99622



Suspension Kit Metallic
○ 99721 (2m)
● 99722 (2m)



Joint 90° Metallic
▩ 99510
■ 99512



Joint 90° Metallic
▩ 99540
■ 99542

Joint 180° Metallic
▩ 99520
■ 99522

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max

Box 11



Box 12







*Useful area: 5x10mm.



*Useful area: 5x10mm.





Box 11

Box 12

Compatible led strips.



Technical Information

	Box 11	Box 12
Max. power	15W/m	15W/m
Installation	Recessed	Surface
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	Aluminium	Aluminium
Code	☐ 11119	☐ 12119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories

Diffuser PC Opal 70%
☐ 20480

Box 11 accessories



End Cap
☐ 11633



End Cap
☐ 11623

Box 12 accessories

Diffuser PC Opal 70%
☐ 20480



End Cap
☐ 12633



End Cap
☐ 12623



Clip
Metallic
■ 20730

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max

Box 13









*Useful area: 12x3mm.

Compatible led strips.



Technical Information

Max. power	15W/m
Installation	Surface / flex
Material	Aluminium 6063 / 6060
Finishes	Aluminium

Code	☐ 13113

Accessories

Diffuser PC Opal 70%
☐ 13480



End Cap
☐ 13633



End Cap
☐ 13623



Clip Metallic
■ 13330

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max

Box 10



22mm x L



70°



*Useful area: 12x17,7mm.

Box 19





*Useful area: 12x17,7mm.



70°

Box 10

Box 19

Compatible led strips.

Technical Information

	Box 10	Box 19
Max. power	25W/m	25W/m
Installation	Recessed	Surface / Pendant
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium	White / Black / Aluminium

Code	Box 10	Box 19
	☐ 10121	☐ 19121
	■ 10122	■ 19122
	☐ 10119	☐ 19119
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Common accessories

Diffuser PC Opal 70%
☐ 20490



Diffuser PC Black 50%
■ 20502



Diffuser Continuous
○ 20997



Joint 90° Metallic
☐ 20510



Joint 90° Metallic
☐ 20540

Joint 120° Metallic
☐ 20530

Joint 180° Metallic
☐ 20520

Box 10 accessories



End Cap
☐ 10621
■ 10622
☐ 10623



Spring Clip Metallic
☐ 20710

Box 19 accessories



End Cap
☐ 19621
■ 19622
☐ 19623



Clip Metallic
☐ 19330



Suspension Kit Metallic
○ 20720 (2m)



Base 455x47x28mm

☐ 35331	■ 35332	30W/24VDC on/off
☐ 35361	■ 35362	60W/24VDC on/off
☐ 35311	■ 35312	100W/24VDC on/off
☐ 35351	■ 35352	150W/24VDC on/off
☐ 35731	■ 35732	30W/24VDC dali
☐ 35761	■ 35762	60W/24VDC dali
☐ 35711	■ 35712	100W/24VDC dali
☐ 35751	■ 35752	150W/24VDC dali

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max

Box 37





40mm x L

*Useful area: 23x20mm.

Compatible led strips.



Technical Information

Max. power	40W/m
Installation	Trimless
Material	Aluminium 6063 / 6060
Finishes	White

Code	☐ 37121
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC
Opal 70%
☐ 37480

End Cap
☐ 37621

CE RoHS

3 YEARS WARRANTY | IP 40 | 2m Max


DEEP WATER
Little One
TAKE THAT NURSING HOMES AND SHOVE IT!

Box 24







27mm x L

*Useful area: 12x3mm.

Compatible led strips.



Technical Information

Max. power	20W/m
Installation	Recessed
Material	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium

Code	
	☐ 24121
	■ 24122
	▩ 24119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
▩ 24440



End Cap
☐ 24631
■ 24632
▩ 24633



End Cap
☐ 24621
■ 24622
▩ 24623



Spring Clip Metallic
▩ 24710

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max



Box 69



16 x L

*Useful area: 10x3mm.





65°

Compatible led strips.



Technical Information

Max. power	15W/m
Installation	Trimless
Material	Aluminium 6063 / 6060
Finishes	Aluminium

Code	☐ 69119

Accessories



Diffuser Continuous (max. 20m)
○ 69440



End Cap
☐ 69633



End Cap
☐ 69623

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max



Box 68





25mm x L

*Useful area: 12x3mm.



Box 32



*Useful area: 12x3mm.



Compatible led strips.



Box 68 Box 32

Technical Information

	Box 68	Box 32
Max. power	20W/m	20W/m
Installation	Trimless	Trimless
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	White / Black	White
Code	☐ 68121 ■ 68122	☐ 32121

Common accessories



Joint 90° Metallic ■ 68450
Joint 90° Metallic ■ 68510
Joint 180° Metallic ■ 68520

Box 68 accessories



Diffuser Continuous (max. 20m) ○ 68997
Diffuser Continuous (max. 20m) ● 68502
End Cap ☐ 68631 ■ 68632
End Cap ☐ 68621 ■ 68622

Box 32 accessories



Diffuser PC Opal 70% ☐ 32440
End Cap ☐ 32631
End Cap ☐ 32621

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max

Box 22







*Useful area: 12x3mm.

Compatible led strips.

Technical Information

Max. power	2x15W/m
Installation	Surface
Material	Aluminium 6063 / 6060
Finishes	Black / Aluminium

Code	
	■ 22122
	□ 22119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC
Opal 70%
□ 20497



Diffuser
Silicone Opal 60%
(max. 60m)
○ 20469
○ 20469-15

End Cap
■ 22622
□ 22623



Clip
Metallic
□ 22330

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max

Box 33



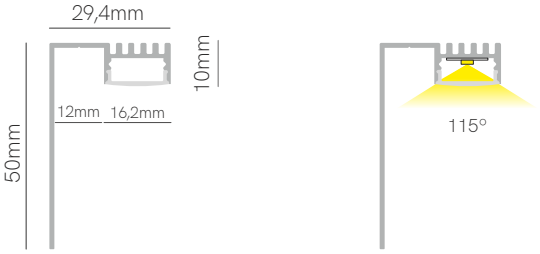

*Useful area: 12,6x6,3mm.

Compatible led strips.



Technical Information

Max. power	20W/m
Installation	Surface
Material	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium

Code	
	☐ 33121
	■ 33122
	▩ 33119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC
Opal 70%
☐ 33440



Diffuser
Silicone Opal 60%
(max. 60m)
○ 20469
○ 20469-15



End Cap
☐ 33621
■ 33622
▩ 33623

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max


▶ VIDEO

Box 98 railing







Compatible led strips.



*Useful area: 10x2mm.

Technical Information

Max. power	30W/m
Installation	Surface / railing
Material	Aluminium 6063 / 6060
Finishes	Black / White

Code	
	○ 98121
	● 98122
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC (2m)
Opal 70%
□ 98440



x2

End Cap Kit
○ 98621
● 98622



3D Joint
○ UNI-98-B-3D
● UNI-98-N-3D



3D Cap
○ TP-98-B-3D
● TP-98-N-3D

CE RoHS

REF. (UNI-98-N-3D/UNI-98-B-3D) Y (TP-98-N-3D-TP-98-B-3D)

3 YEARS WARRANTY | IP 20 | 2m

Box 21



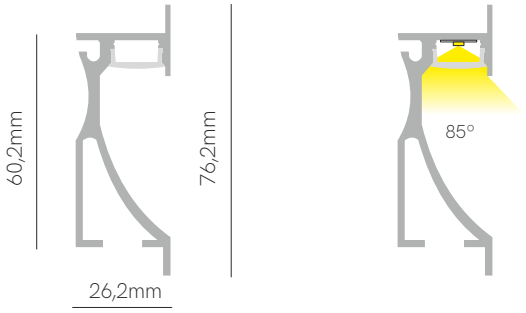

*Useful area: 12x3mm.

Compatible led strips.

Technical Information

Max. power	15W/m
Installation	Recessed
Material	Aluminium 6063 / 6060
Finishes	White / Aluminium

Code	☐ 21121
	☐ 21119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
☐ 20497



Diffuser Silicone Opal 60% (max. 60m)
◯ 20469
◯ 20469-15



End Cap Left
☐ 21631
☐ 21633



End Cap Right
☐ 21621
☐ 21623

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max

Box 27







*Useful area: 12x3mm.

Compatible led strips.



Technical Information

Max. power	15W/m
Installation	Surface
Material	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium

Code	
	☐ 27121
	■ 27122
	☐ 27119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
☐ 20497



Diffuser Silicone Opal 60% (max. 60m)
○ 20469
○ 20469-15



End Cap left
☐ 27631
■ 27632
☐ 27633



End Cap right
☐ 27621
■ 27622
☐ 27623

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max





Box 65



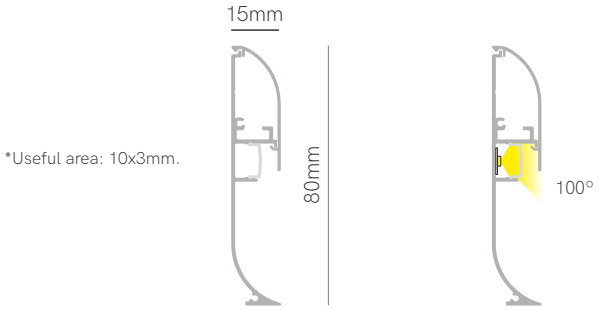

Compatible led strips.



Technical Information

Max. power	12W/m
Installation	Surface / skirting
Material	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium

Code	
	☐ 65121
	■ 65122
	▩ 65119
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
▩ 65440



End Cap Kit
☐ 65621
■ 65622
▩ 65623



90° outside connector
☐ 65221
■ 65222
▩ 65223



90° inside connector
☐ 65331
■ 65332
▩ 65333

Joint 180° Metallic
▩ 65550

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max

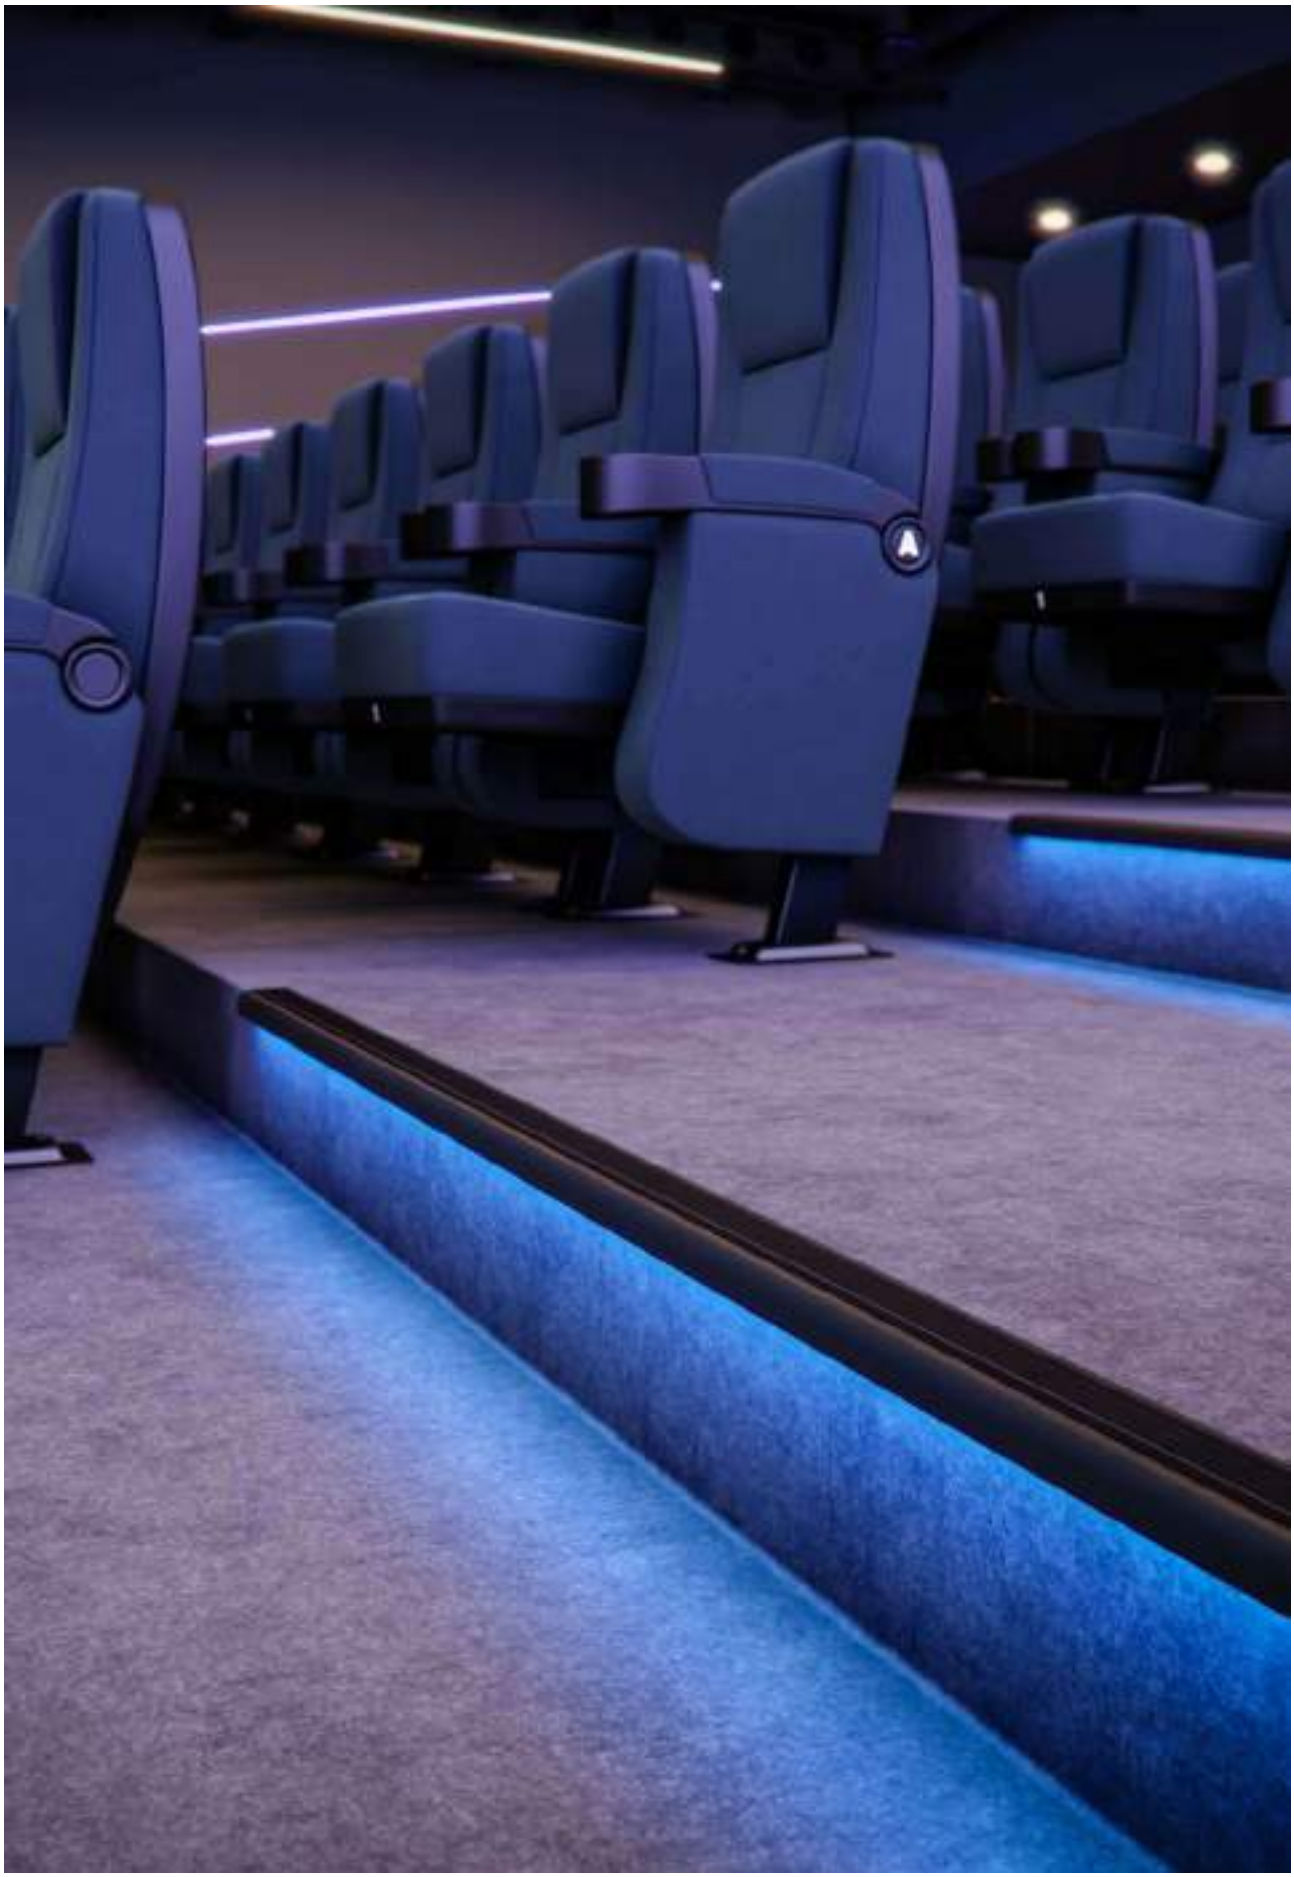

Box 67





*Useful area: 12x3mm.



Compatible led strips.



Technical Information

Max. power	12W/m
Installation	Surface / stairs
Material	Aluminium 6063 / 6060
Finishes	Black

Code	■ 67122

Accessories

Diffuser PC Opal 70%
□ 67440



End Cap Left
■ 67632-L



End Cap Right
■ 67632-R



PVC anti-skid cover
■ 67452

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max

Box 39







Opal 90°
Transparent 105°



Optic 30°

*Useful area: 12x8mm.

Compatible led strips.



Technical Information

Max. power	25W/m
Installation	Surface / Pendant
Material	Aluminium 6063 / 6060
Finishes	Black

Code	● 39122
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
○ 39440

Diffuser PC Transp. 90%
○ 39450

Diffuser PC Optic 30%
□ 39430



End Cap
● 39622



Clip Plastic
○ 25530



Suspension Kit
○ 25887 (2m)



Suspension Kit
○ 39720



Base 455x47x28mm
□ 35331 (30W/24V) ■ 35332 (30W/24V)
□ 35361 (60W/24V) ■ 35362 (60W/24V)
□ 35311 (100W/24V) ■ 35312 (100W/24V)

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max

Box 28







*Useful area: 12x5mm.

Compatible led strips.



Technical Information

Max. power	40W/m
Installation	Surface
Material	Aluminium 6063 / 6060
Finishes	Aluminium

Code	○ 28119

Accessories



Diffuser PC
Optic 30%
○ 28430



End Cap
○ 28633



End Cap
○ 28623



Clip
Metallic
□ 28330

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max





Box 29







*Useful area: 12x18mm.

Compatible led strips.



Technical Information

Max. power	25W/m
Installation	Recessed
Material	Aluminium 6063 / 6060
Finishes	Aluminium

Code	29119

Accessories

Diffuser PC
Opal 70%
29480



End Cap
29623

CE RoHS

3 YEARS WARRANTY | IP 55 | IK10 | 1000kg | 2m Max

Box 73







*Useful area: 12x7mm.

Compatible led strips.

Technical Information

Max. power	22W/m
Installation	Surface
Material	Aluminium 6063 / 6060
Finishes	White / Black / Aluminium

Code	
	☐ 73121
	■ 73122
	▩ 73119
①	Custom RAL

① Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%
▩ 73440



End Cap
☐ 73621
■ 73622
▩ 73623



End Cap
☐ 73631
■ 73632
▩ 73633

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max

Box 30 12mm





Box 30 20mm







Compatible led strips.



Technical Information

	Box 30 12mm	Box 30 20mm
Max. power	20W/m	40W/m
Installation	Surface	Surface
Material	Aluminium 6063 / 6060	Aluminium 6063 / 6060
Finishes	Aluminium	Aluminium
Code	☐ 30129	☐ 30209

ⓘ Consult delivery terms and conditions.

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max



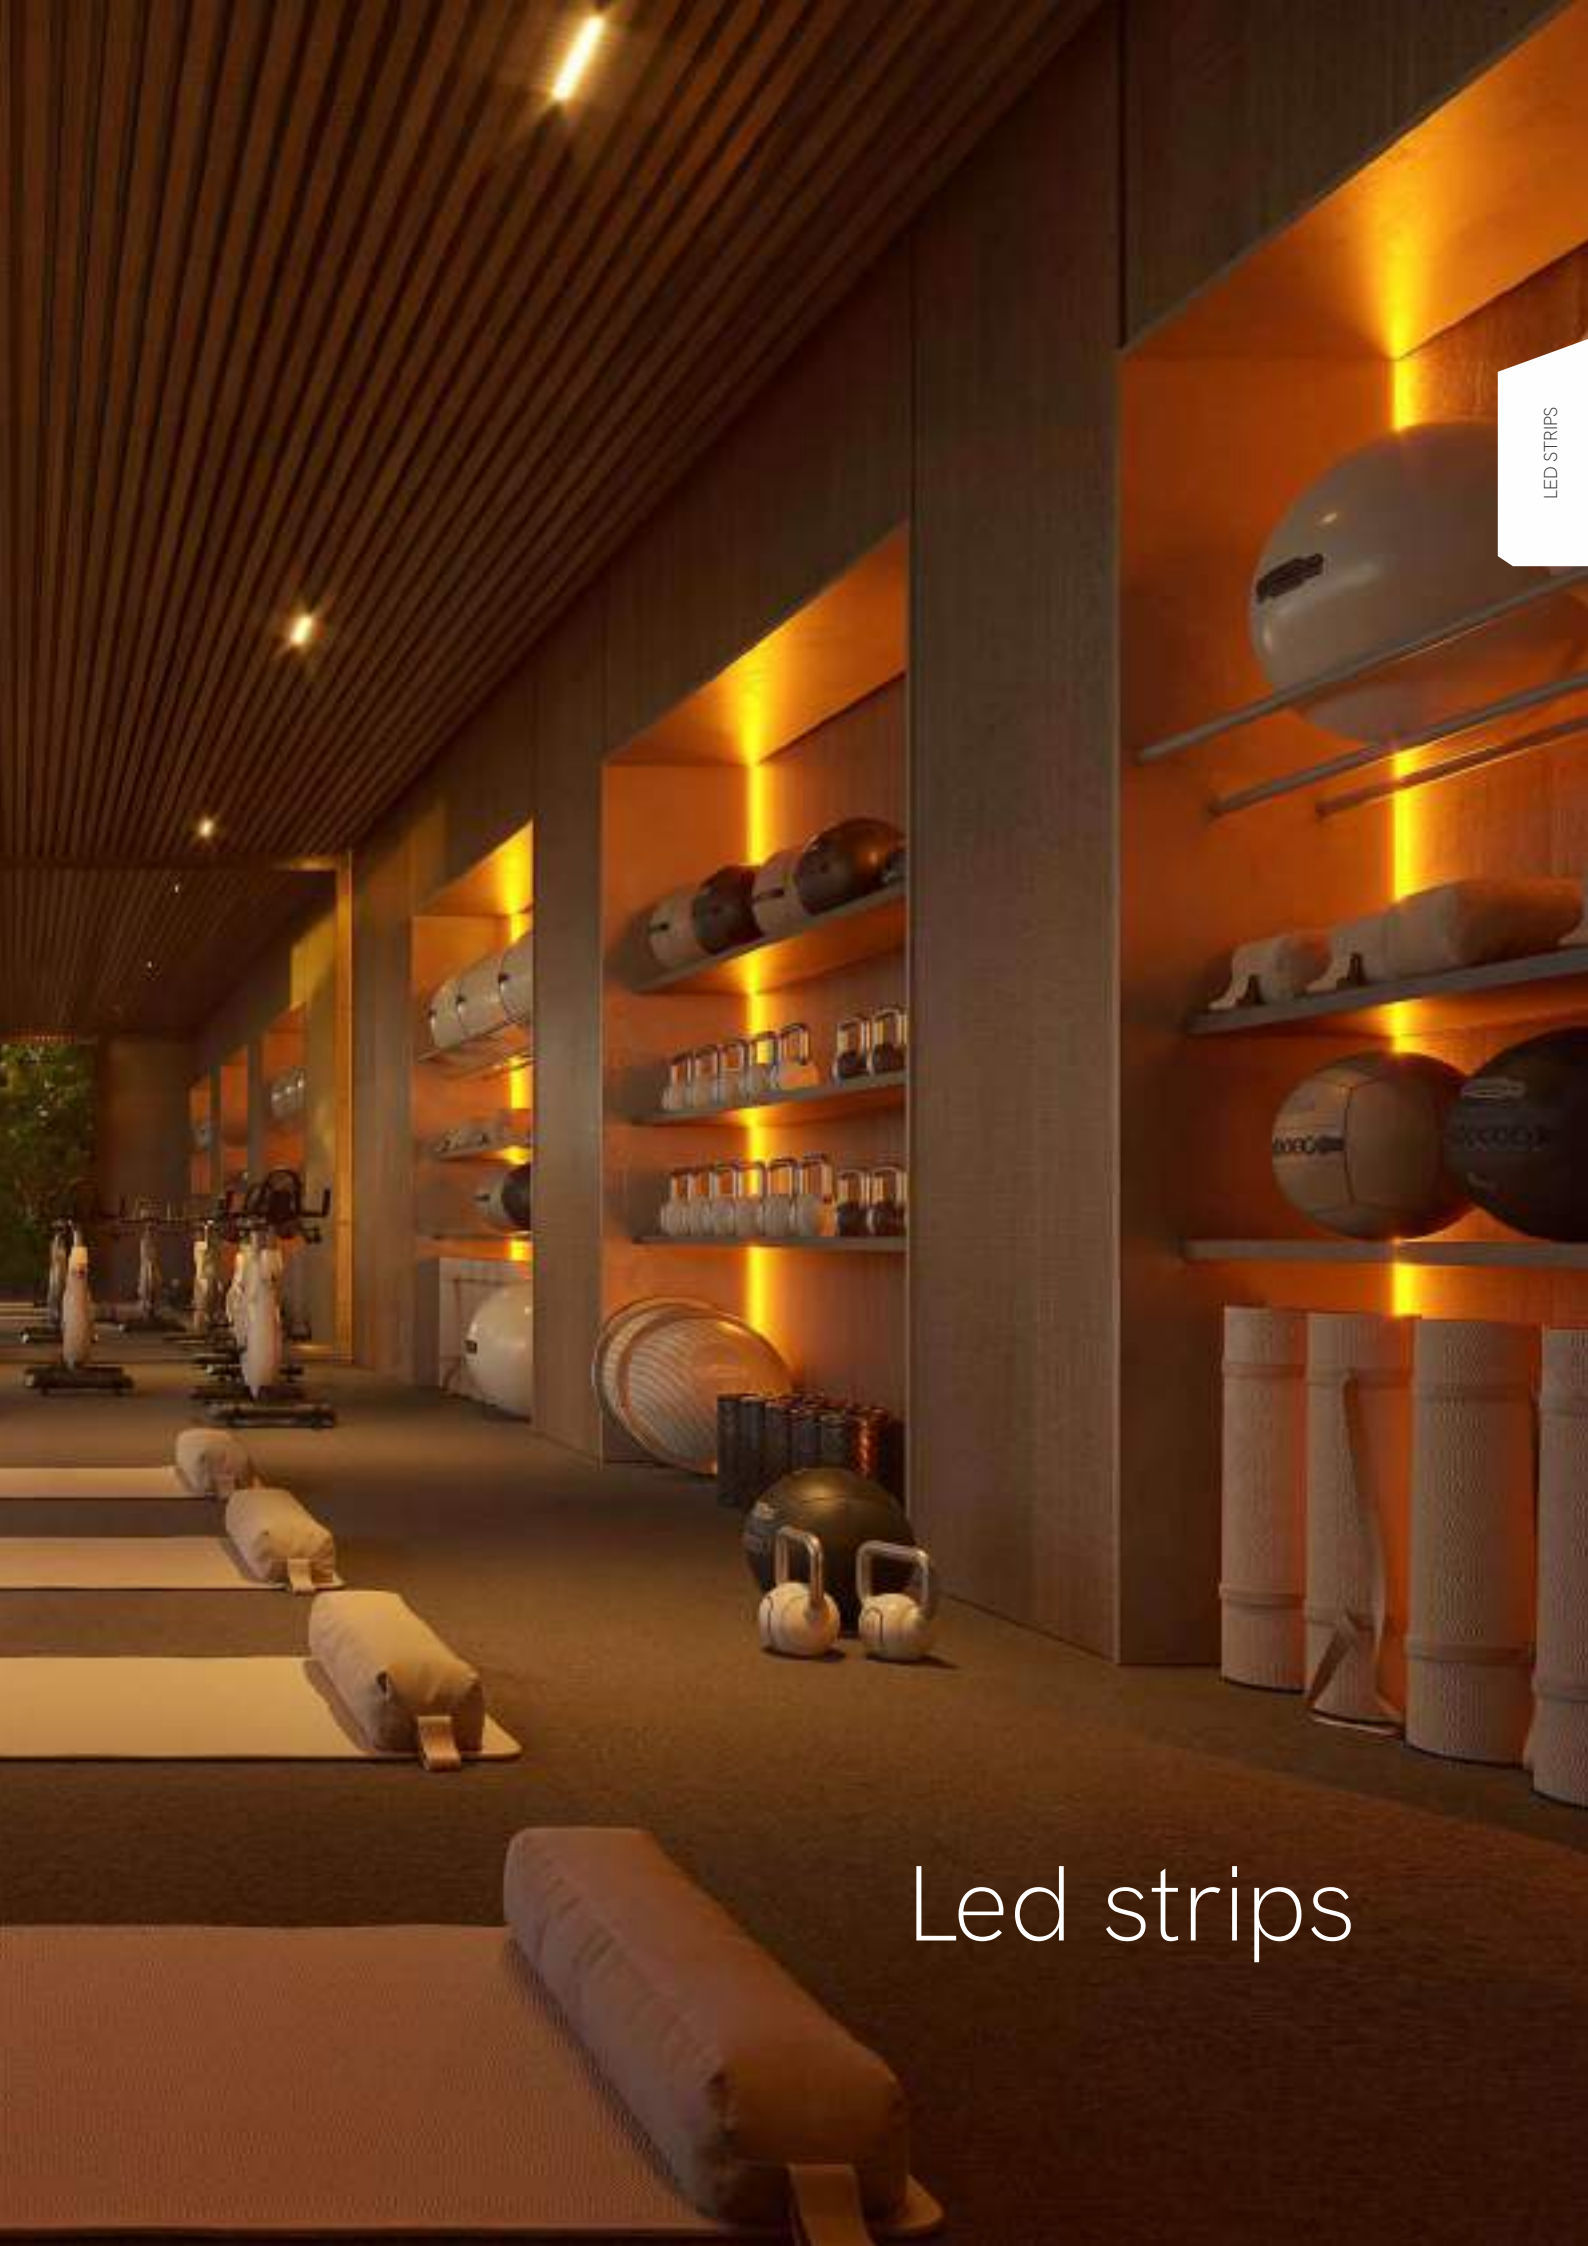

Led strips

	Model	Page	Power	Width	CCT
NEW	FINE 20	242	6W/m	8mm	2700K 3000K 4000K
NEW	FINE 26	243	6W/m	5mm	2700K 3000K 4000K
	FINE 25	305	20W/m	Ø25mm	2400K 2700K 3000K 4000K CCT RGB
	FINE 30	257	30W/m	20mm	2700K 3000K 4000K
	FINE 31	244	12W/m	10mm	2200K 2700K 3000K 4000K
	FINE 32 N	261	15W/m	12mm	2700K 3000K 4000K 6000K
	FINE 34	307	5W/m	6mm	2700K 3000K 4000K
	FINE 36	274	12W/m	10mm	CCT
	FINE 37	265	14,4W/m	10mm	2700K 3000K 4000K
	FINE 41	249	14,4W/m	10mm	2700K 3000K 4000K 6000K
	FINE 42	277	19,2W/m	10mm	CCT
	FINE 43	282	19,2W/m	12mm	RGB
	FINE 44	271	14,4W/m	10mm	MEAT FISH FRUIT BREAD
	FINE 45	289	10W/m	10mm	RED GREEN BLUE
	FINE 46	281	14,4W/m	10mm	RGB
	FINE 47	288	14,4W/m	12mm	RGB-W
	FINE 48	235	5W/m	10mm	2200K 2700K 3000K 4000K
	FINE 49	263	10W/m	4mm	2700K 3000K 4000K 6000K
	FINE 50	283	9,6W/m	5mm	RGB
	FINE 51	259	9,6W/m	10mm	2700K 3000K 4000K 6000K
	FINE 52	247	22W/m	10mm	2700K 3000K 4000K 6000K
	FINE 54	279	14W/m	10mm	RGB
	FINE 55	264	24W/m	20mm	2700K 3000K 4000K
	FINE 56	256	22W/m	15mm	2700K 3000K 4000K CCT
	FINE 60	285	8W/m	12mm	RGB
	FINE 61	252	15W/m	10mm	2700K 3000K 4000K 6000K
	FINE 63	273	19W/m	10mm	CCT
	FINE 64	234	2,5W/m	10mm	2700K 3000K 4000K
	FINE 66 N	286	20W/m	12mm	RGB-W

Lumens	CRI	Density	Voltage	IP20	IP54	IP65	IP67
72-84 Lm/W	≥97 CRI	320 LED/m	24 VDC	-			-
98-106 Lm/W	≥90 CRI	400 LED/m	24 VDC		-	-	-
41-73 Lm/W	≥90 CRI	240-480 LED/m	24 VDC	-	-	-	
150-160 Lm/W	≥90 CRI	352 LED/m	24 VDC		-	-	-
85-100 Lm/W	≥90 CRI	512 LED/m	24 VDC		-	-	
100-110 Lm/W	≥80 CRI	112 LED/m	220/240 VAC	-	-		-
28-32 Lm/W	≥90 CRI	196 LED/m	24 VDC	-	-	-	
100 Lm/W	≥90 CRI	140 LED/m	24 VDC		-	-	-
126-140 Lm/W	≥90 CRI	160 LED/m	48 VDC		-	-	-
92-102 Lm/W	≥90 CRI	140 LED/m	24 VDC		-		-
90 Lm/W	≥90 CRI	168 LED/m	24 VDC		-		-
90 Lm/W	-	240 LED/m	24 VDC		-	-	-
85-95 Lm/W	75/97 CRI	140 LED/m	24 VDC		-	-	-
15-91 Lm/W	-	480 LED/m	24 VDC		-	-	
38-41 Lm/W	-	144 LED/m	24 VDC		-		-
18-60 Lm/W	-	60 LED/m	24 VDC		-	-	-
110-135 Lm/W	≥90 CRI	160 LED/m	24 VDC		-	-	-
71-77 Lm/W	≥90 CRI	204 LED/m	24 VDC		-	-	-
58 Lm/W	-	120 LED/m	24 VDC		-	-	-
100 Lm/W	≥90 CRI	120 LED/m	24 VDC		-	-	
97-112 Lm/W		238 LED/m	24 VDC		-	-	
45-50 Lm/W	-	120 LED/m	24 VDC		-	-	
80-86 Lm/W	≥90 CRI	120 LED/m	24 VDC		-	-	-
130-170 Lm/W	≥80 CRI	160 LED/m	24 VDC		-	-	-
81 Lm/W	-	60 LED/m	24 VDC		-	-	-
110-125 Lm/W	≥90 CRI	160 LED/m	24 VDC		-		-
89-95 Lm/W	≥90 CRI	640 LED/m	24 VDC		-	-	
110-120 Lm/W	≥90 CRI	140 LED/m	24 VDC		-	-	-
167 Lm/W	-	840 LED/m	24 VDC		-	-	

	Model	Page	Power	Width	CCT
	FINE 68	250	19,2W/m	10mm	2700K 3000K 4000K
	FINE 69	241	9,6W/m	10mm	2200K 2700K 3000K 4000K 6000K
	FINE 70	311	5W/m	12,8mm	2700K 3000K 4000K RGB
	FINE 71	287	21W/m	12mm	RGB WW
	FINE 72	313	10W/m	16mm	2700K 3000K 4000K RGB
NEW	FINE 73	316	14,4W/m	19mm	2700K 3000K
	FINE 74	315	10W/m	24mm	2700K 3000K 4000K RGB
	FINE 75	260	7W/m	12mm	2700K 3000K 4000K
	FINE 76	253	15W/m	12mm	3000K 4000K
	FINE 77	309	8W/m	19mm	2700K 3000K 4000K RGB
	FINE 79	251	10W/m	8mm	2700K 3000K 4000K
NEW	FINE 81	275	22,5W/m	10mm	RGB CCT
	FINE 82	245	15W/m	8mm	2700K 3000K 4000K
	FINE 84	239	4,8W/m	10mm	2700K 3000K 4000K 6000K
NEW	FINE 86	267	10W/m	10mm	2700K 3000K RGB
	FINE 88	262	12W/m	5mm	2200K 2700K 3000K 4000K
NEW	FINE 90	268	10W/m	8mm	2700K 3000K 4000K
NEW	FINE 91	269	24W/m	10mm	CCT
	FINE 92	246	10W/m	6mm	2700K 3000K 4000K
	FINE 96	255	18W/m	18,5mm	3000K 4000K RGB-W
	FINE 97	237	10W/m	10mm	2200K
	FINE DMX-4	299	12W/m	12mm	RGB
	FINE DMX-5	301	17W/m	12mm	RGB-W
	FINE RUNNING	291	12W/m	10mm	3000K 4000K
	FINE SPI-2	293	14W/m	10mm	RGB
	FINE SPI-3	295	11W/m	10mm	RGB-W
	FINE SPI-4	296	20W/m	Ø25mm	RGB
NEW	FINE SPI-5	297	12W/m	8mm	RGB

Lumens	CRI	Density	Voltage	IP20	IP65	IP67
130-140 Lm/W	≥90 CRI	200 LED/m	24 VDC		-	-
87-102 Lm/W		140 LED/m	24 VDC			-
15-37 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
29-117 Lm/W	-	96 LED/m	24 VDC		-	
26-65 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
48-51 Lm/W	≥80 CRI	140 LED/m	24 VDC	-	-	
22-65 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
100-110 Lm/W	≥80 CRI	120 LED/m	220/240 VAC	-		-
120-128 Lm/W	≥90 CRI	126 LED/m	24 VDC		-	-
26-55 Lm/W	≥90 CRI	120 LED/m	24 VDC	-	-	
170-180 Lm/W	≥80 CRI	160 LED/m	24 VDC			-
100 Lm/W	≥80 CRI	216 LED/m	24 VDC		-	-
65-70 Lm/W	≥90 CRI	480 LED/m	24 VDC		-	-
95-102 Lm/W	≥90 CRI	70 LED/m	24 VDC			-
47-95 Lm/W	≥90 CRI	480 LED/m	24 VDC	-	-	 IP68
90-110 Lm/W	≥90 CRI	140 LED/m	24 VDC		-	-
95-110 Lm/W	≥80 CRI	60 LED/m	24 VDC		-	-
95 Lm/W	≥90 CRI	216 LED/m	24 VDC		-	-
80-90 Lm/W	≥97 CRI	320 LED/m	24 VDC		-	-
67,5-120 Lm/W	≥90 CRI	48 LED/m	24 VDC	-	-	
140 Lm/W	-	160 LED/m	24 VDC		-	-
42 Lm/W	-	70 LED/m	24 VDC	-	-	
50 Lm/W	-	70 LED/m	24 VDC		-	
79-87 Lm/W	≥90 CRI	360 LED/m	24 VDC		-	-
37 Lm/W	-	84 LED/m	24 VDC		-	-
51 Lm/W	-	60 LED/m	24 VDC		-	-
12,5 Lm/W	-	168 LED/m	24 VDC	-	-	
48 Lm/W	-	60 LED/m	24 VDC		-	-

Fine 64



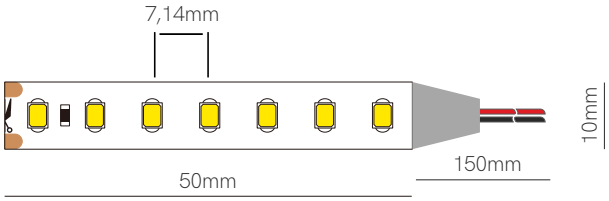



Compatible profiles.

Technical Information

V / A / W	24V / 0,1A / 2,5W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	64270	110 lm/w	275 lm/m	2700K	IP20
	64300	115 lm/w	287 lm/m	3000K	IP20
	64400	120 lm/w	300 lm/m	4000K	IP20

Accessories



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120

*Available in reel of 10 meters.

Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 2,5 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | LM-80 | 2835

Fine 48



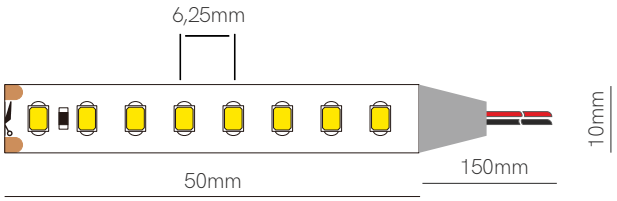



Compatible profiles.



Technical Information

V / A / W	24V / 0,2A / 5W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	48220	110 lm/w	550 lm/m	2200K	IP20
	48270	120 lm/w	600 lm/m	2700K	IP20
	48300	130 lm/w	650 lm/m	3000K	IP20
	48400	135 lm/w	675 lm/m	4000K	IP20
	48225	110 lm/w	550 lm/m	2200K	IP65
	48275	120 lm/w	600 lm/m	2700K	IP65
	48305	130 lm/w	650 lm/m	3000K	IP65
	48405	135 lm/w	675 lm/m	4000K	IP65

Accessories

End Cap
○ 20635

End Cap
○ 20625



Joint
13,8x11,55x3,9mm
□ 20220



Joint
13,55x11,67x4,7mm
□ 20120



Joint
24,3x14,6x7,7mm
□ 20225



Joint
24,3x14,6x7,7mm
□ 20125

*Available in reel of 10 meters. Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 5 W/m | 160 LED/m | CRI ≥90 | 24 VDC | 50mm | LM-80 | 2835


VELVET
JAZZ
VIDEO

Fine 97



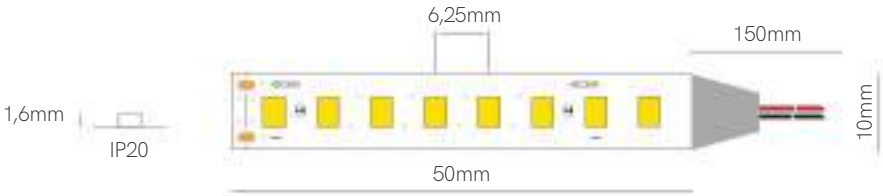







Compatible profiles.



Technical Information

V / A / W	24V / 0,4A / 10W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	97220	140 lm/w	1.400 lm/m	2200K	IP20

Accessories



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120

*Available in reel of 5 meters. Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 10 W/m | 160 LED/m | 24 VDC | 50mm | LM-80 | 2835



Casa Aliso, Vitoria (Spain). Interior design: WOOD STUDIO. Photography: Vicugo Studio.

Fine 84



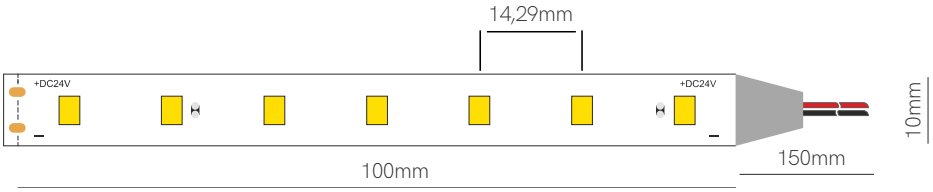



Compatible profiles.



Technical Information

V / A / W	24V / 0,2A / 4,8W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	84270	95 lm/w	456 lm/m	2700K	IP20
	84300	98 lm/w	470 lm/m	3000K	IP20
	84400	100 lm/w	480 lm/m	4000K	IP20
	84600	102 lm/w	489 lm/m	6000K	IP20
	84275	90 lm/w	432 lm/m	2700K	IP65
	84305	92 lm/w	441 lm/m	3000K	IP65
	84405	95 lm/w	456 lm/m	4000K	IP65
	84605	97 lm/w	465 lm/m	6000K	IP65

Accessories

End Cap
○ 20635

End Cap
○ 20625



Joint
24,3x14,6x7,7mm
□ 20225



Joint
24,3x14,6x7,7mm
□ 20125



Joint
15,4x11,5x5,7mm
□ 20991



Joint
21,6x11,5x5,7mm
□ 20999

*Available in reel of 5 or 25 meters. Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 4,8 W/m | 70 LED/m | CRI ≥90 | 24 VDC | 100mm | LM-80 | 2835



Building contractor: Construplan Construcciones y planificación S.L.U. Photography: David Rodríguez.



Architecture: Room C Studio, Gran Canaria (Spain).

Fine 69



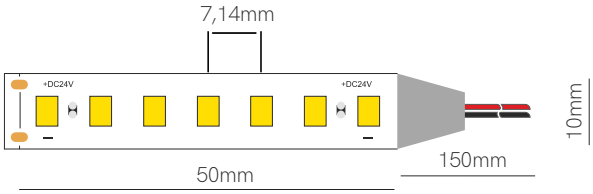



Compatible profiles.



Technical Information

V / A / W	24V / 0,4A / 9,6W/m

Code	Code	Lumen/w	Lumen/m	CCT	IP
	69220	87 lm/w	835 lm/m	2200K	IP20
	69270	95 lm/w	912 lm/m	2700K	IP20
	69300	98 lm/w	940 lm/m	3000K	IP20
	69400	100 lm/w	960 lm/m	4000K	IP20
	69600	102 lm/w	979 lm/m	6000K	IP20
	69225	87 lm/w	835 lm/m	2200K	IP65
	69275	90 lm/w	864 lm/m	2700K	IP65
	69305	92 lm/w	883 lm/m	3000K	IP65
	69405	95 lm/w	912 lm/m	4000K	IP65
	69605	97 lm/w	931 lm/m	6000K	IP65

Accessories

End Cap
○ 20635

End Cap
○ 20625



Joint
13,8x11,55x3,9mm
□ 20220



Joint
13,55x11,67x4,7mm
□ 20120



Joint
24,3x14,6x7,7mm
□ 20225



Joint
24,3x14,6x7,7mm
□ 20125

*Available in reel of 5 or 25 meters. Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 9,6 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | LM-80 | 2835

New

Fine 20





2,1mm | IP54

Compatible profiles.

Technical Information

V / A / W	24V / 0,25A / 6W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	20274	72 lm/w	432 lm/m	2700K	IP54
	20304	78 lm/w	468 lm/m	3000K	IP54
	20404	84 lm/w	504 lm/m	4000K	IP54

Accessories


End cap
☐ 20825


End cap
☐ 20865


Connector Cable
☐ 20818


Joint
☐ 20828


L Joint
☐ 20838

*Available in reel of 10 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 6 W/m | 320 LED/m | CRI ≥97 | 24 VDC | 50mm | LM-80 | COB

New

Fine 26







Compatible profiles.



Technical Information

V / A / W	24V / 0,25A / 6W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	26270	98 lm/w	588 lm/m	2700K	IP20
	26300	101 lm/w	606 lm/m	3000K	IP20
	26400	106 lm/w	636 lm/m	4000K	IP20

Accessories



Connector Cable
☐ 20518



Joint
☐ 20528

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 6 W/m | 400 LED/m | CRI ≥90 | 24 VDC | 20mm | LM-80 | COB

Fine 31



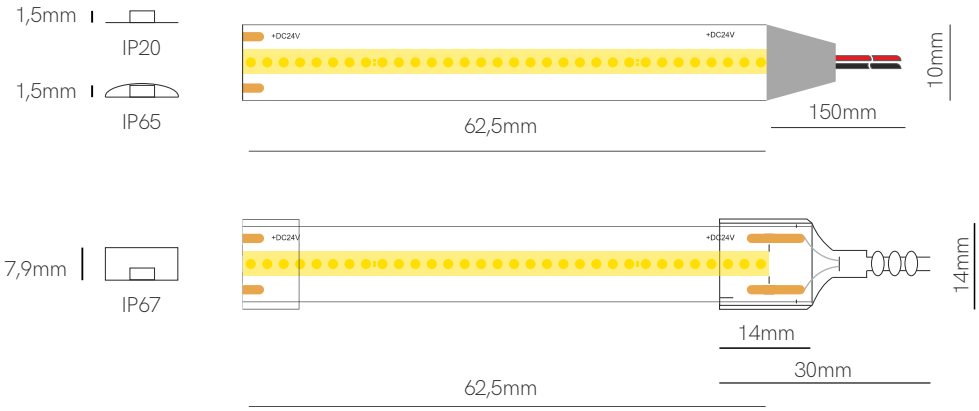

Compatible profiles.

Technical Information

V / A / W	24V / 0,5A / 12W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	31220	85 lm/w	1.020 lm/m	2200K	IP20
	31270	95 lm/w	1.140 lm/m	2700K	IP20
	31300	98 lm/w	1.176 lm/m	3000K	IP20
	31400	100 lm/w	1.200 lm/m	4000K	IP20
	31225 New	85 lm/w	1.020 lm/m	2200K	IP65
	31275 New	95 lm/w	1.140 lm/m	2700K	IP65
	31305 New	98 lm/w	1.176 lm/m	3000K	IP65
	31405 New	100 lm/w	1.200 lm/m	4000K	IP65
	31227	80 lm/w	960 lm/m	2200K	IP67
	31277	90 lm/w	1.080 lm/m	2700K	IP67
	31307	93 lm/w	1.116 lm/m	3000K	IP67
	31407	95 lm/w	1.140 lm/m	4000K	IP67

Accessories



End Cap	End Cap	Joint	Joint	Joint	L Joint
32635	32625	31709	31809	31909	20C90

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 12 W/m | 512 LED/m | CRI ≥90 | 24 VDC | 62,5mm | LM-80 | COB

Fine 82



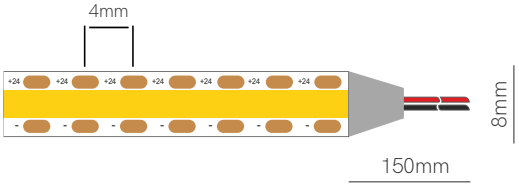



Compatible profiles.



Technical Information

V / A / W	24V / 0,63A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	82270	65 lm/w	650 lm/m	2700K	IP20
	82300	65 lm/w	650 lm/m	3000K	IP20
	82400	70 lm/w	700 lm/m	4000K	IP20

Accessories



Connector Cable
☐ 20818



Joint
☐ 20828



L Joint
☐ 20838



L Joint
☐ 20T90

*Available in reel of 10 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 10 W/m | 480 LED/m | CRI ≥90 | 24 VDC | Free cut | LM-80 | COB

Fine 92







Compatible profiles.

Technical Information

V / A / W	24V / 0,42A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	92270	80 lm/w	800 lm/m	2700K	IP20
	92300	85 lm/w	850 lm/m	3000K	IP20
	92400	90 lm/w	900 lm/m	4000K	IP20

*Available in reel of 10 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 10 W/m | 320 LED/m | CRI ≥97 | III | 24 VDC | 50mm | LM-80 | COB

Fine 52



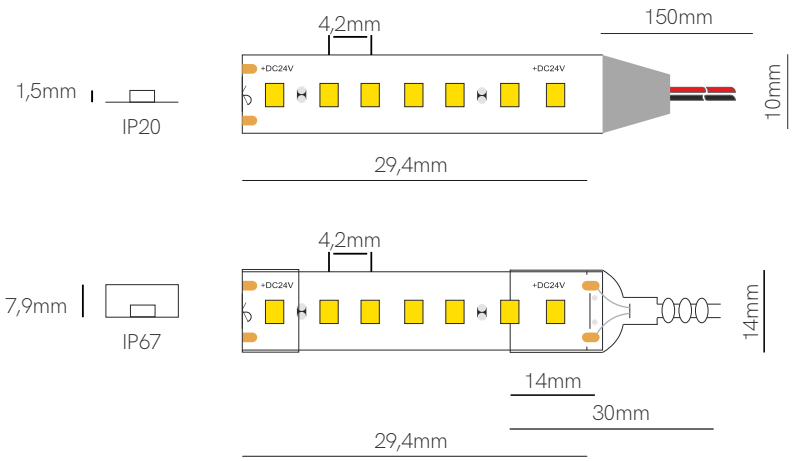

Compatible profiles.



Technical Information

V / A / W	24V / 0,91A / 22W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	52270	97 lm/w	2.134 lm/m	2700K	IP20
	52300	103 lm/w	2.266 lm/m	3000K	IP20
	52400	108 lm/w	2.376 lm/m	4000K	IP20
	52600	112 lm/w	2.464 lm/m	6000K	IP20
	52277	97 lm/w	2.134 lm/m	2700K	IP67
	52307	103 lm/w	2.266 lm/m	3000K	IP67
	52407	108 lm/w	2.376 lm/m	4000K	IP67
	52607	112 lm/w	2.464 lm/m	6000K	IP67

Accessories

End Cap
☐ 32635

End Cap
☐ 32625



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 22 W/m | 238 LED/m | CRI ≥90 | 24 VDC | 29,4mm | LM-80 | 2835



Fine 41



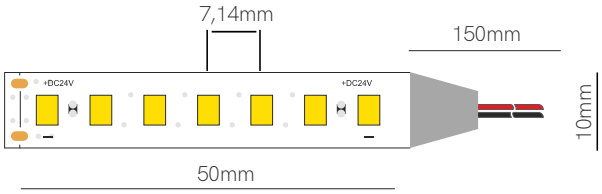



Compatible profiles.



Technical Information

V / A / W	24V / 0,6A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	41270	95 lm/w	1.368 lm/m	2700K	IP20
	41300	98 lm/w	1.411 lm/m	3000K	IP20
	41400	100 lm/w	1.440 lm/m	4000K	IP20
	41600	102 lm/w	1.468 lm/m	6000K	IP20
	41275	90 lm/w	1.296 lm/m	2700K	IP65
	41305	92 lm/w	1.324 lm/m	3000K	IP65
	41405	95 lm/w	1.368 lm/m	4000K	IP65
	41605	97 lm/w	1.396 lm/m	6000K	IP65

Accessories

End Cap
○ 20635

End Cap
○ 20625



Joint
13,8x11,55x3,9mm
□ 20220



Joint
13,55x11,67x4,7mm
□ 20120



Joint
24,3x14,6x7,7mm
□ 20225



Joint
24,3x14,6x7,7mm
□ 20125

*Available in reel of 5 or 25 meters. Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 14,4 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | LM-80 | 2835

Fine 68



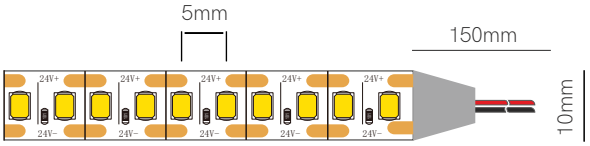



Compatible profiles.

Technical Information

V / A / W	24V / 0,8A / 19,2W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	68270	130 lm/w	2.496 lm/m	2700K	IP20
	68300	135 lm/w	2.592 lm/m	3000K	IP20
	68400	140 lm/w	2.688 lm/m	4000K	IP20

Accessories



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120

*Available in reel of 5 meters.

Accessories pages 317-319.

RoHS | 5 YEARS WARRANTY | 19,2 W/m | 200 LED/m | CRI ≥90 | III | 24 VDC | Free cut | LM-80 | 2835

Fine 79



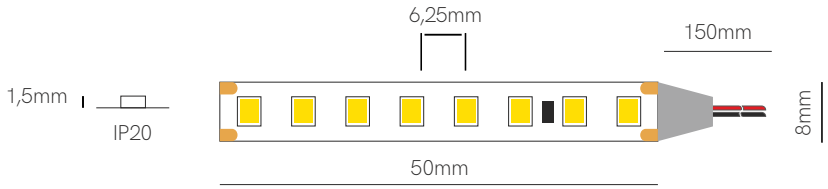

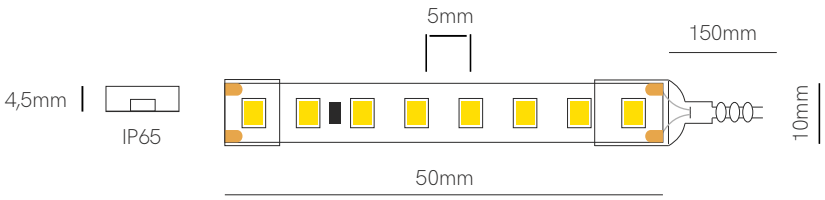

Compatible profiles.



Technical Information

V / A / W	24V / 0,42A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	79270	170 lm/w	1.700 lm/m	2700K	IP20
	79300	175 lm/w	1.750 lm/m	3000K	IP20
	79400	180 lm/w	1.800 lm/m	4000K	IP20
	79275	170 lm/w	1.700 lm/m	2700K	IP65
	79305	175 lm/w	1.750 lm/m	3000K	IP65
	79405	180 lm/w	1.800 lm/m	4000K	IP65

Accessories



End cap
☐ 20825



End cap
☐ 20865



Connector Cable
☐ 20818



Joint
☐ 20828



L Joint
☐ 20838



L Joint
☐ 20T90

*Available in reel of 5 meters. Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 10 W/m | 160 LED/m | CRI ≥80 | 24 VDC | 50mm | LM-80 | 2835

beneito-faure.com

Fine 61



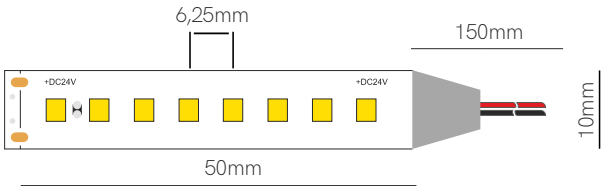



Compatible profiles.

Technical Information

V / A / W	24V / 0,62A / 15W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	61270	110 lm/w	1.650 lm/m	2700K	IP20
	61300	115 lm/w	1.725 lm/m	3000K	IP20
	61400	120 lm/w	1.800 lm/m	4000K	IP20
	61600	125 lm/w	1.875 lm/m	6000K	IP20
	61275	110 lm/w	1.650 lm/m	2700K	IP65
	61305	115 lm/w	1.725 lm/m	3000K	IP65
	61405	120 lm/w	1.800 lm/m	4000K	IP65
	61605	125 lm/w	1.875 lm/m	6000K	IP65

Accessories

End Cap
20635

End Cap
20625



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120



Joint
24,3x14,6x7,7mm
20225



Joint
24,3x14,6x7,7mm
20125

*Available in reel of 5 or 25 meters. Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 15 W/m | 160 LED/m | CRI ≥90 | 24 VDC | 50mm | LM-80 | 2835

Fine 76



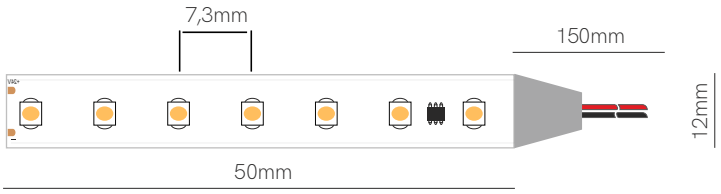





Compatible profiles.



Technical Information

V / A / W	24V / 0,62A / 15W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	76300	120 lm/w	1.800 lm/m	3000K	IP20
	76400	128 lm/w	1.920 lm/m	4000K	IP20

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 15 W/m | 126 LED/m | CRI ≥80 | 24 VDC | 50mm | LM-80 | 2835 LENS

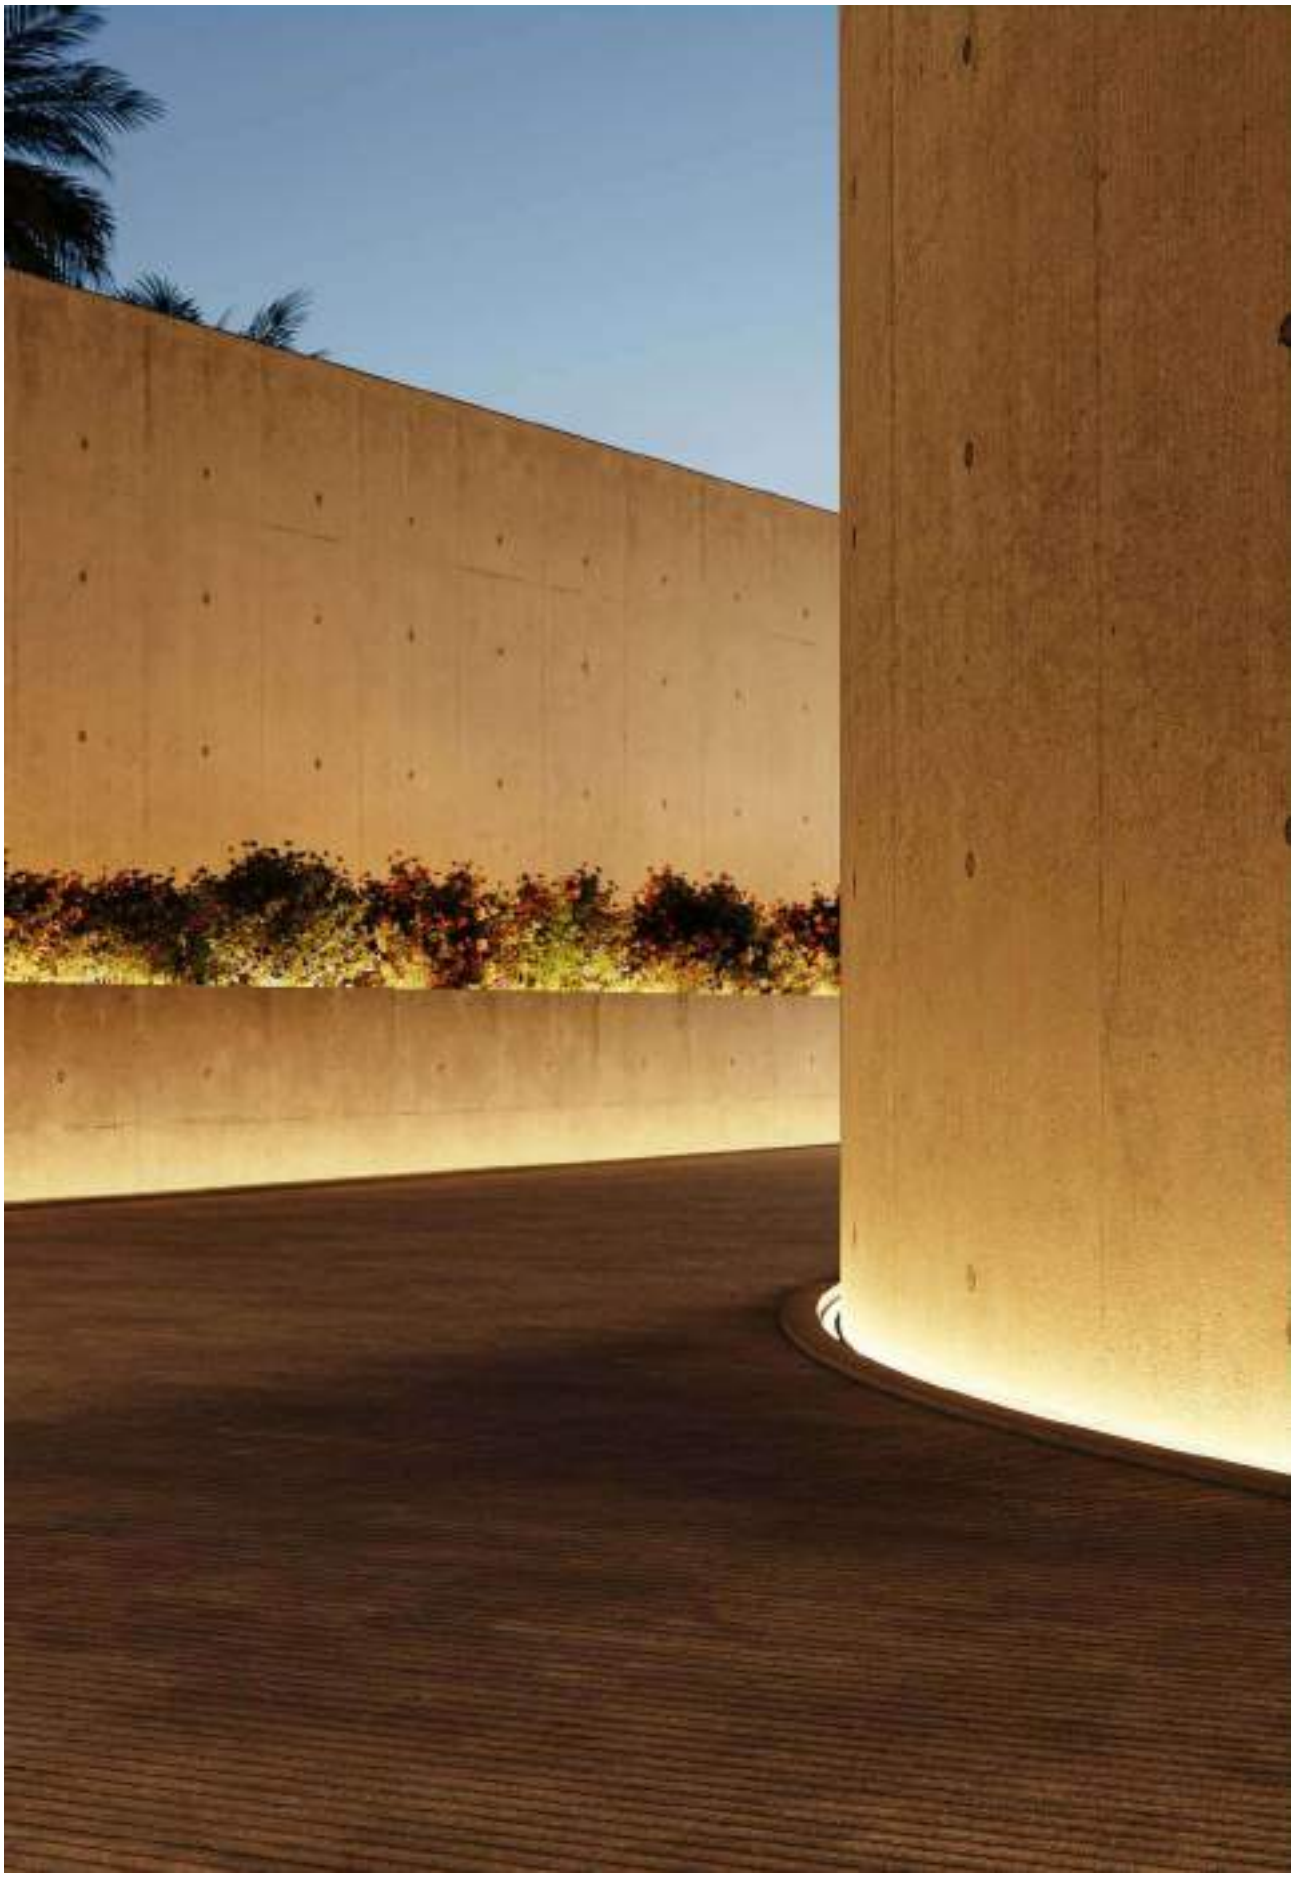

Fine 96



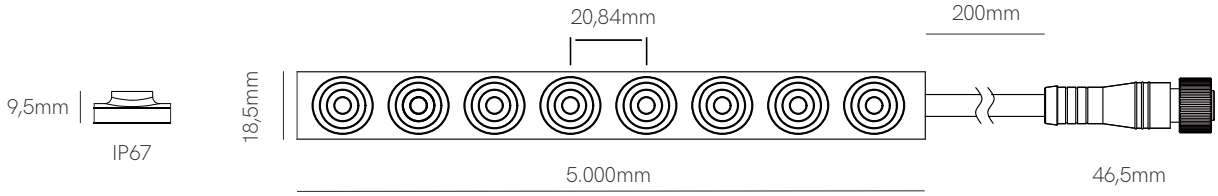



Integrated optics

Compatible profiles.



Technical Information

V / A / W (3.000K / 4.000K)	24V / 0,75A / 20W/m
V / A / W (RGB-W)	24V / 0,33A / 20W/m
Red	44 lm/w 5W
Green	89 lm/w 5W
Blue	25 lm/w 5W
White	77 lm/w 5W

Code	Code	Lumens/w	Lumens/m	CCT	IP
	96307	71 lm/w	1.915 lm/m	3000K	IP67
	96407	74 lm/w	2.167 lm/m	4000K	IP67
	96477	55 lm/w	1.200 lm/m	RGB-W 3.000K	IP67

Accessories



End Cap
☐ 96633



End Cap
☐ 96623



Clip
☐ 96119



Clip
☐ 96380



Clip
☐ 96330



Clip
☐ 96350



ADH
○ 96111



Extension cable
☐ 96946-M2
☐ 96946-M4
☐ 96946-H2
☐ 96946-H4



Extension cable
☐ 96920-2
☐ 96920-4

*Available in reel of 5 meters. Accessories pages 317-319.

CE RoHS

3 YEARS WARRANTY | 18/8 W/m | 42 LED/m | CRI ≥90 | 24 VDC | monocolor 23,81mm rgb-w 166mm | LM-80 | 2835 RGB 5050

Fine 56



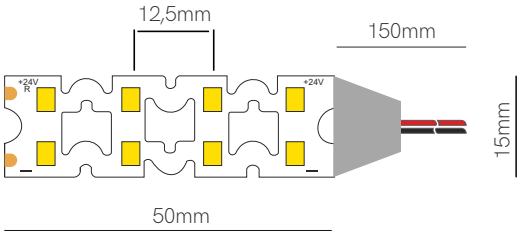



Compatible profiles.

Technical Information

V / A / W	24V / 0,91A / 22W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	56270	155 lm/w	3.410 lm/m	2700K	IP20
	56300	160 lm/w	3.520 lm/m	3000K	IP20
	56400	170 lm/w	3.740 lm/m	4000K	IP20
	56360	130 lm/w	2.860 lm/m	2.700-6.000K	IP20

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 22 W/m | 160 LED/m | CRI ≥80 | III | 24 VDC | 50 mm | LM-80 | 2835

Fine 30



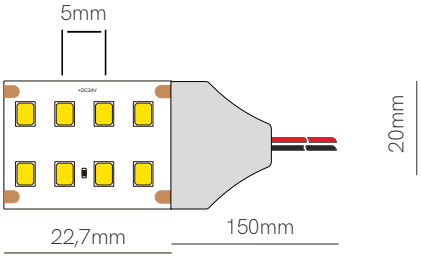



Compatible profiles.



Technical Information

V / A / W	24V / 1,25A / 30W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	30270	152 lm/w	4.560 lm/m	2700K	IP20
	30300	161 lm/w	4.826 lm/m	3000K	IP20
	30400	169 lm/w	5.069 lm/m	4000K	IP20

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 30 W/m | 352 LED/m | CRI ≥90 | III | 24 VDC | 22,7mm | LM-80 | 2835



Fine 51



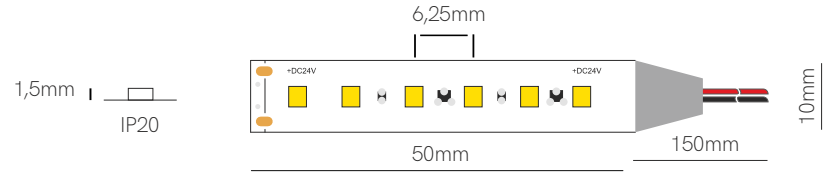

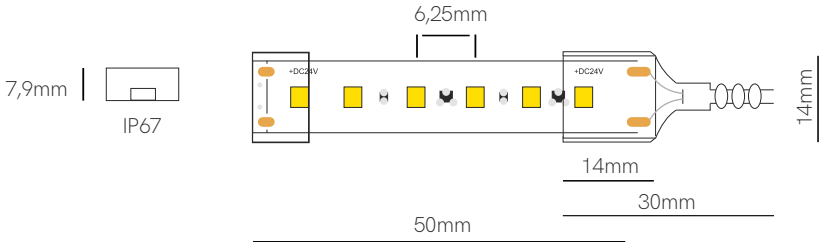

Compatible profiles.



Technical Information

V / A / W	24V / 0,4A / 9,6W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	51270	100 lm/w	960 lm/m	2700K	IP20
	51300	100 lm/w	960 lm/m	3000K	IP20
	51400	100 lm/w	960 lm/m	4000K	IP20
	51600	100 lm/w	960 lm/m	6000K	IP20
	51277	100 lm/w	960 lm/m	2700K	IP67
	51307	100 lm/w	960 lm/m	3000K	IP67
	51407	100 lm/w	960 lm/m	4000K	IP67
	51607	100 lm/w	960 lm/m	6000K	IP67

Accessories

End Cap
☐ 32635

End Cap
☐ 32625



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120

*Available in reel of 20 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 9,6 W/m | 120 LED/m | CRI ≥90 | 24 VDC | ULTRALONG | 50mm | LM-80 | 2835

Fine 75



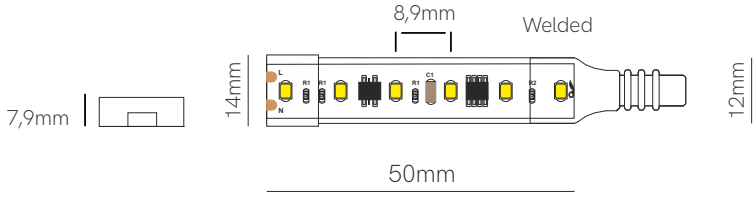

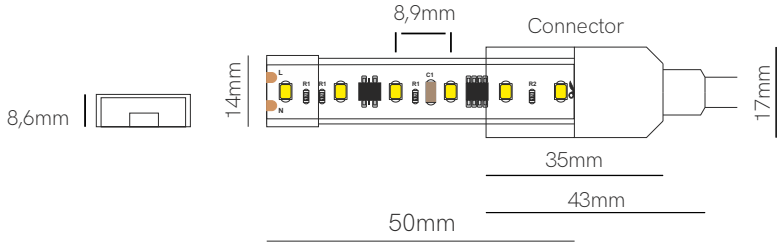

Compatible profiles.

Technical Information

V / A / W	220V / 0,03A / 7W/m

Code	Lumen/w	Lumen/m	CCT	IP
75275	100 lm/w	700 lm/m	2700K	IP65
75305	105 lm/w	735 lm/m	3000K	IP65
75405	110 lm/w	770 lm/m	4000K	IP65

Accessories

End Cap
☐ 32635

End Cap
☐ 32625



Connector kit
☐ 32699



Join 180°
☐ 32899



Join 90°
☐ 32499

Clip
☐ 32900

Joint
☐ 32299

*Available in reel of 50 meters. Accessories pages 317-319.

CE RoHS | 3 YEARS WARRANTY | 7 W/m | 120 LED/m | CRI ≥80 | 220/240 VAC | 50mm | TRIAC DIMM 30-100% | LM-80 | 2835

Fine 32 N



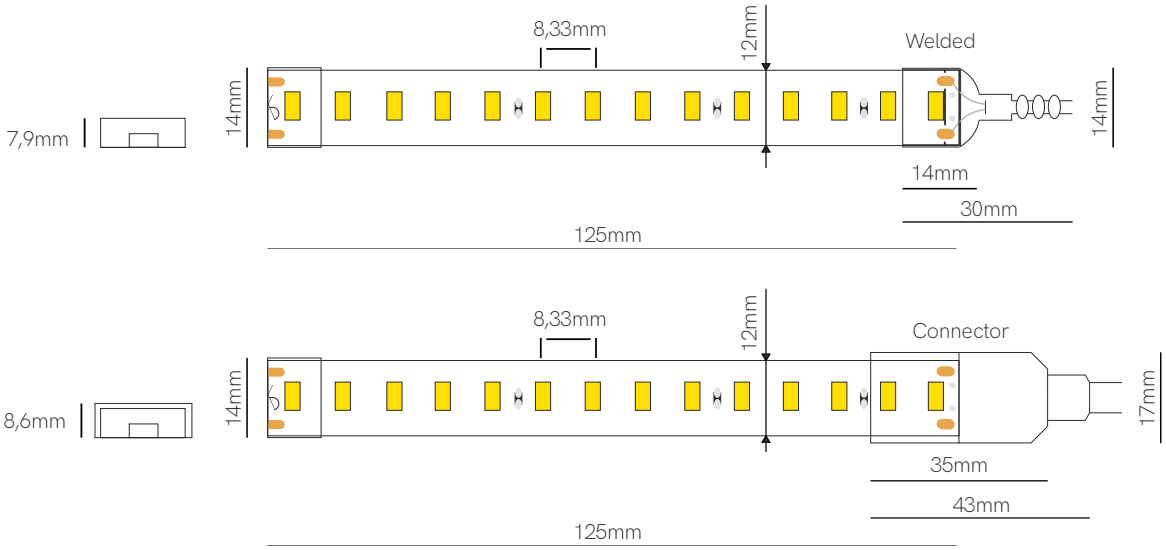

Compatible profiles.



Technical Information

V / A / W	220V / 0,068A / 15W/m

Code	Code	Lumen/w	Lumen/m	CCT	IP
	32275-N	100 lm/w	1.500 lm/m	2700K	IP65
	32305-N	105 lm/w	1.575 lm/m	3000K	IP65
	32405-N	110 lm/w	1.650 lm/m	4000K	IP65
	32605-N	110 lm/w	1.650 lm/m	6000K	IP65

Accessories



End Cap ☐ 32635

End Cap ☐ 32625

Connector kit ☐ 32699

Join 180° ☐ 32899

Join 90° ☐ 32499

Clip ☐ 32900

Joint ☐ 32299

*Available in reel of 5 or 50 meters. Accessories pages 317-319.

CE RoHS

3 YEARS WARRANTY | 15 W/m | 112 LED/m | CRI ≥80 | 220/240 VAC | 125mm | TRIAC DIMM 30-100% | LM-80 | 2835

Fine 88





5mm

50mm

2mm

IP20

Compatible profiles.

Technical Information

V / A / W	24V / 0,5A / 12W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	88220	90 lm/w	1.080 lm/m	2200K	IP20
	88270	100 lm/w	1.200 lm/m	2700K	IP20
	88300	105 lm/w	1.260 lm/m	3000K	IP20
	88400	110 lm/w	1.320 lm/m	4000K	IP20

Accessories



Connector Cable
☐ 20518



Joint
☐ 20528

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 12 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | LM-80 | 2835

Fine 49



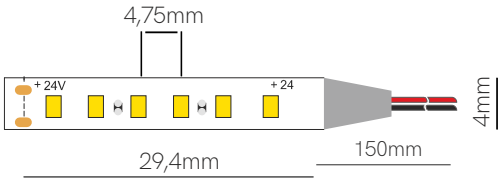



Compatible profiles.



Technical Information

V / A / W	24V / 0,4A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	49270	71 lm/w	710 lm/m	2700K	IP20
	49300	74 lm/w	740 lm/m	3000K	IP20
	49400	77 lm/w	770 lm/m	4000K	IP20
	49600	74 lm/w	740 lm/m	6000K	IP20

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 10 W/m | 204 LED/m | CRI ≥90 | 24 VDC | 29,4mm | LM-80 | 2216

Fine 55



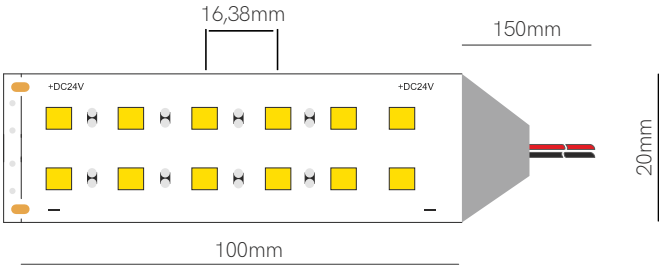



Compatible profiles.

Technical Information

V / A / W	24V / 1A / 24W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	55270	84 lm/w	2.016 lm/m	2700K	IP20
	55300	89 lm/w	2.136 lm/m	3000K	IP20
	55400	94 lm/w	2.256 lm/m	4000K	IP20

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 24 W/m | 120 LED/m | CRI ≥90 | 24 VDC | 100mm | LM-80 | 5050

Fine 37



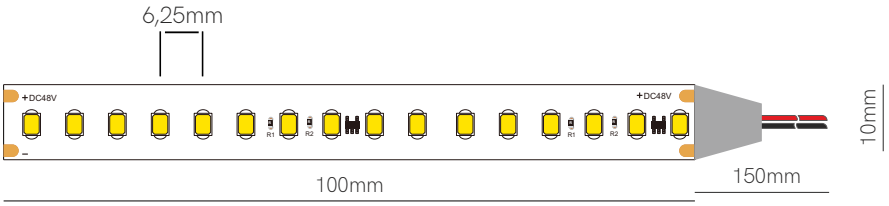



Compatible profiles.



Technical Information

V / A / W	48V / 0,3A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	37270	126 lm/w	1.815 lm/m	2700K	IP20
	37300	135 lm/w	1.944 lm/m	3000K	IP20
	37400	140 lm/w	2.016 lm/m	4000K	IP20

Power supply 48V (page 366).

Accessories



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120

*Available in reel of 25 meters.

Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 14,4 W/m | 160 LED/m | CRI ≥90 | 48 VDC | 100mm | LM-80 | 2835



New

Fine 86



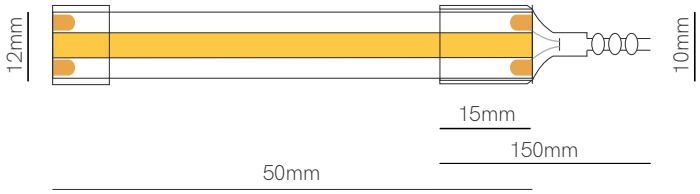

3mm | IP67

Compatible profiles.



Technical Information

V / A / W	24V / 0,42A / 10W/m / 12W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	86277	95 lm/w	950 lm/m	2700K	IP67
	86307	95 lm/w	950 lm/m	3000K	IP67
	86467	95 lm/w	1.140 lm/m	RGB-W 3.000K	IP67

Accessories

End Cap ☐ 32635

End Cap ☐ 32625

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 10 W/m 2700K 3000K | 12 W/m RGB-W | 480 LED/m | CRI ≥90 | 24 VDC | 50mm | LM-80 | COB

New

Fine 90



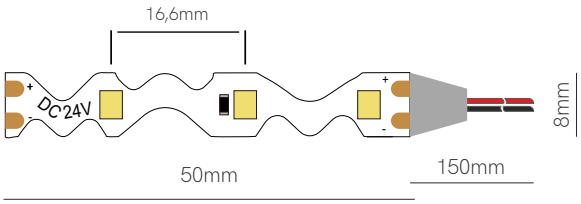



Compatible profiles.

Technical Information

V / A / W	24V / 0,42A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	90270	95 lm/w	950 lm/m	2700K	IP20
	90300	105 lm/w	1.050 lm/m	3000K	IP20
	90400	110 lm/w	1.100 lm/m	4000K	IP20

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS | 3 YEARS WARRANTY | 10 W/m | 60 LED/m | CRI ≥80 | III | 24 VDC | 50mm | LM-80 | 2835

New

Fine 91



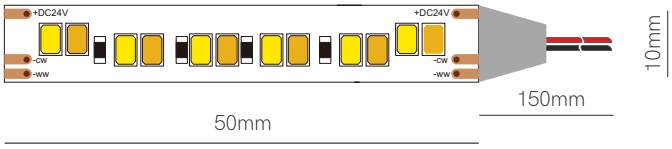



Compatible profiles.



Technical Information

V / A / W	24V / 1,00A / 24W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	91360	95 lm/w	2.280 lm/m	2.700-6.000K	IP20

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 24 W/m | 216 LED/m | CRI ≥90 | 24 VDC | 50mm | LM-80 | COB



Fine 44



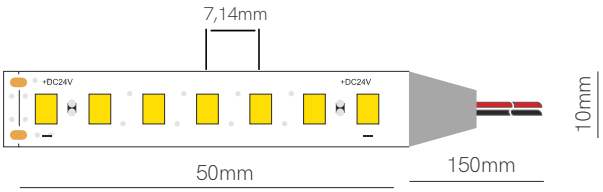




MEAT STRIP


FISH STRIP


FRUIT STRIP


BREAD STRIP

Compatible profiles.



Technical Information

V / A / W	24V / 0,6A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	44370	85lm/w	1.224 lm/m	MEAT (3.700K)	IP20
	44110	95 lm/w	1.368 lm/m	FISH (11.600K)	IP20
	44500	90 lm/w	1.296 lm/m	FRUIT (5.000K)	IP20
	44270	80 lm/w	1.152 lm/m	BREAD (2.700K)	IP20

Accessories


Joint
13,8x11,55x3,9mm
20220


Joint
13,55x11,67x4,7mm
20120

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 14,4 W/m | 140 LED/m | CRI 75/97 | III | 24 VDC | 50mm | LM-80 | 2835



Fine 63



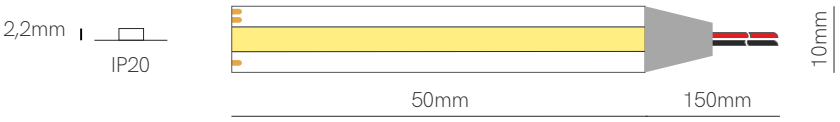

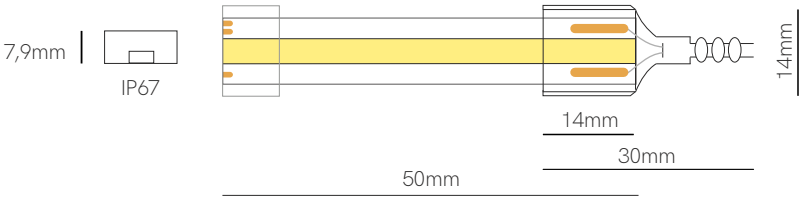

Compatible profiles.



Technical Information

V / A / W	24V / 0,79A / 19W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	63360	80-95 lm/w	800-1.750 lm/m	2.700-6.500K	IP20
	63367	80-95 lm/w	800-1.750 lm/m	2.700-6.500K	IP67

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS

3 YEARS WARRANTY | 19 W/m | 640 LED/m | CRI ≥90 | 24 VDC | 50mm | COB

Fine 36



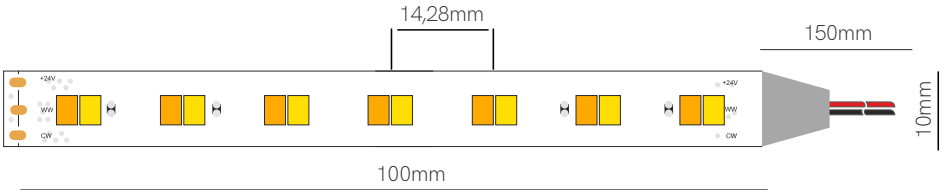



Compatible profiles.

Technical Information

V / A / W	24V / 0,5A / 12W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	36360	90-110 lm/w	1.200 lm/m	2.700-5.000K	IP20

Accessories



Joint
13,57x11,63x3,5mm
☐ 20230



Joint
13,57x11,63x4,7mm
☐ 20130

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 12 W/m | 140 LED/m | CRI ≥90 | III | 24 VDC | 100mm | 2835

New

Fine 81



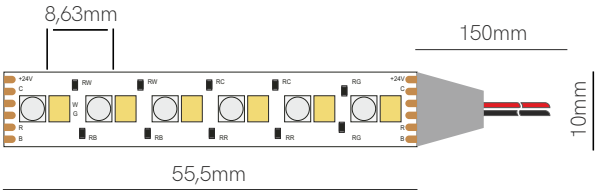



Compatible profiles.



Technical Information

V / A / W	24V / 0,94A / 22,5W/m

	Code	Lumens/w	Lumens/m	CCT		IP
Code	81470	100 lm/w	2.250 lm/m	RGB	2.700-6.000K	IP20

Accessories



Joint
☐ 20738



Connector Cable
☐ 20718



Joint
☐ 20728

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 22,5 W/m | 216 LED/m | CRI ≥80 | III | 24 VDC | 55mm | LM-80 | 2835


▶ VIDEO

Fine 42



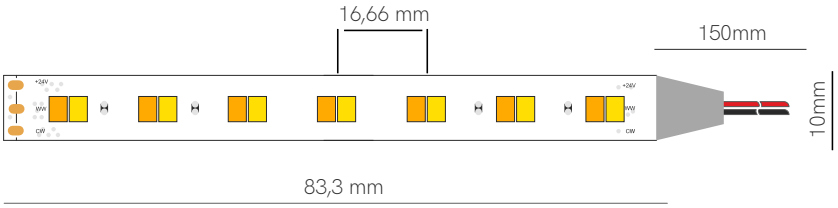



Compatible profiles.



Technical Information

V / A / W	24V / 0,8A / 19,2W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	42360	85-104 lm/w	1.728 lm/m	1.800-4.000K	IP20
	42365	85-104 lm/w	1.728 lm/m	1.800-4.000K	IP65

Accessories

End Cap
20635

End Cap
20625



Joint
13,57x11,63x3,5mm
20230



Joint
13,57x11,63x4,7mm
20130



Joint
24,3x14,6x7,7mm
20235



Joint
24,3x14,6x7,7mm
20135

*Available in reel of 5 or 25 meters. Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 19,2 W/m | 168 LED/m | CRI ≥90 | 24 VDC | 83,3mm | 2835


▶ VIDEO

Fine 54



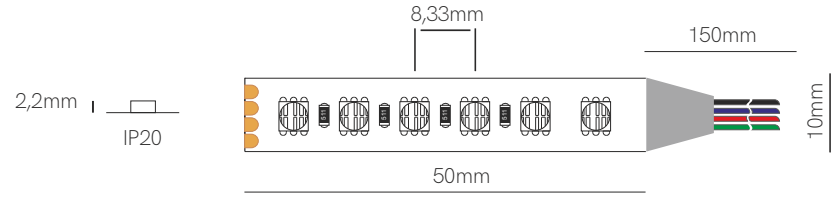

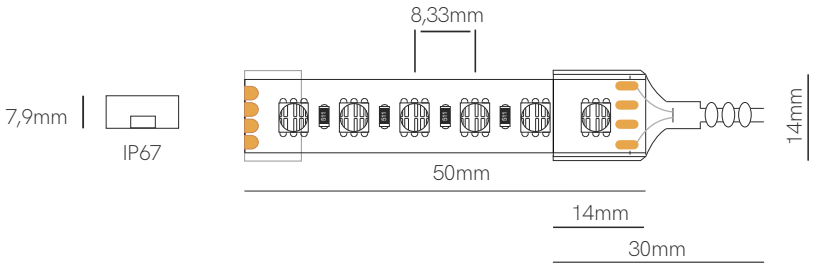

Compatible profiles.



Technical Information

V / A / W	24V / 0,6A / 14W/m
Red	33 lm/w 4,6W
Green	75 lm/w 4,6W
Blue	21 lm/w 4,6W

	Code	Lumens/w	Lumens/m	CCT	IP
Code	54460	50 lm/w	700 lm/m	RGB	IP20
	54467	45 lm/w	630 lm/m	RGB	IP67

Accessories

End Cap
☐ 32635

End Cap
☐ 32625



Joint
13,54x11,7x4,1mm
☐ 20240



Joint
13,56x13,46x4,7mm
☐ 20140

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 14 W/m | 120 LED/m | 24 VDC | 50mm | 4040



Connecta Fisioteràpia i Salut, Barcelona (Spain).

Fine 46



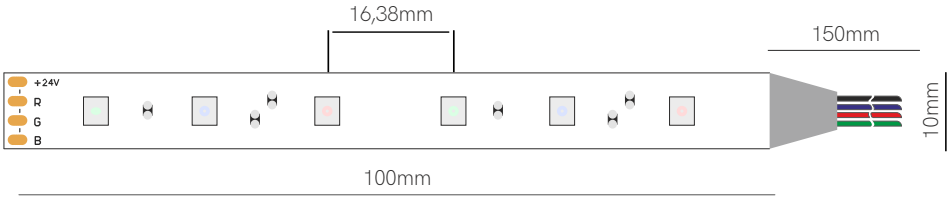



Compatible profiles.



Technical Information

V / A / W	24V / 0,6A / 14,4W/m
Red	33 lm/w 4,8W
Green	75 lm/w 4,8W
Blue	21 lm/w 4,8W

Code	Code	Lumens/w	Lumens/m	CCT	IP
Code	46460	38 lm/w	547 lm/m	RGB	IP20
	46465	41 lm/w	590 lm/m	RGB	IP65

Accessories

End Cap
○ 20635

End Cap
○ 20625



Joint
13,54x11,7x4,1mm
□ 20240



Joint
13,56x13,46x4,7mm
□ 20140



Joint
24,3x14,6x7,68mm
□ 20245



Joint
24,3x14,6x7,68mm
□ 20145

*Available in reel of 5 or 25 meters. Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 14,4 W/m | 60 LED/m | 24 VDC | 50mm | 5050

Fine 43



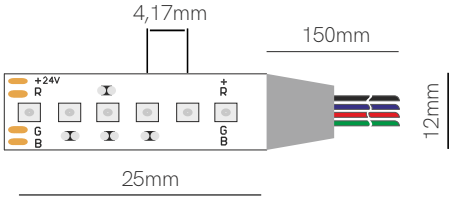



Compatible profiles.

Technical Information

V / A / W	24V / 0,8A / 19,2W/m
Red	23 lm/w 6,4W
Green	75 lm/w 6,4W
Blue	21 lm/w 6,4W

	Code	Lumens/w	Lumens/m	CCT	IP
Code	43430	58 lm/w	1.728 lm/m	RGB	IP20

*Available in reel of 5 meters.

Accessories pages 317-319.

RoHS

5 YEARS WARRANTY | 19,2 W/m | 240 LED/m | 24 VDC | 25mm | 3535

Fine 50



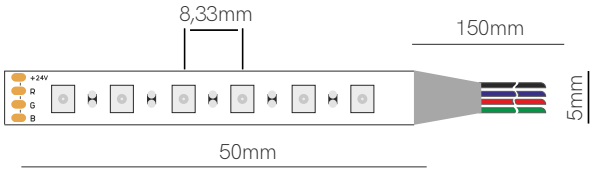



Compatible profiles.



Technical Information

V / A / W	24V / 0,4A / 9,6W/m
Red	25 lm/w 3,2W
Green	78 lm/w 3,2W
Blue	13 lm/w 3,2W

	Code	Lumens/w	Lumens/m	CCT	IP
Code	50460	58 lm/w	556 lm/m	RGB	IP20

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 9,6 W/m | 120 LED/m | 24 VDC | 50mm | 2835



Fine 60



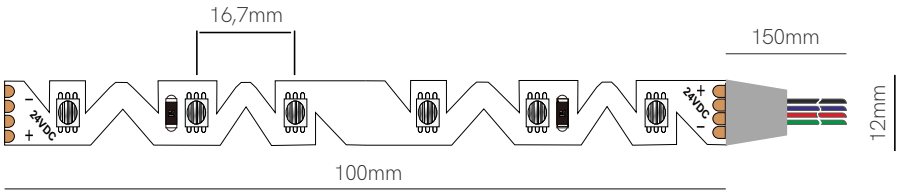



Compatible profiles.



Technical Information

V / A / W	24V / 0,33A / 8W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	60460	81 lm/w	648 lm/m	RGB	IP20

Accessories



Joint
13,54x11,7x4,1mm
☐ 20240



Joint
13,56x13,46x4,7mm
☐ 20140

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 8 W/m | 60 LED/m | 24 VDC | III | 100mm | 5050

Fine 66 N



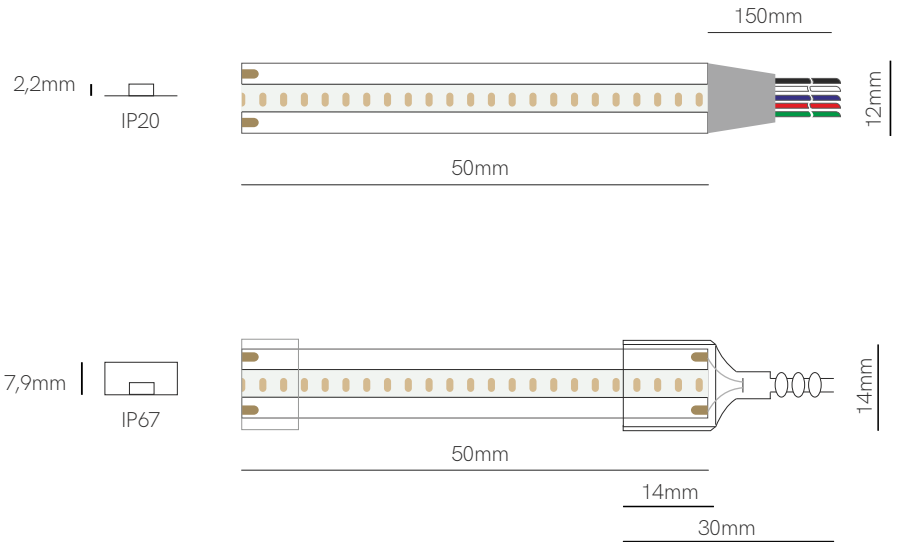

Compatible profiles.

Technical Information

V / A / W	24V / 1A / 24W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	66470/N	167 lm/w	996 lm/m	RGB-W 2.700K	IP20
	66477/N	167 lm/w	996 lm/m	RGB-W 2.700K	IP67

Accessories

End Cap
☐ 32635

End Cap
☐ 32625



Joint
☐ 20066



Joint
☐ 20266

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 24 W/m | 560 LED/m | 24 VDC | III | 50mm | CSP

Fine 71



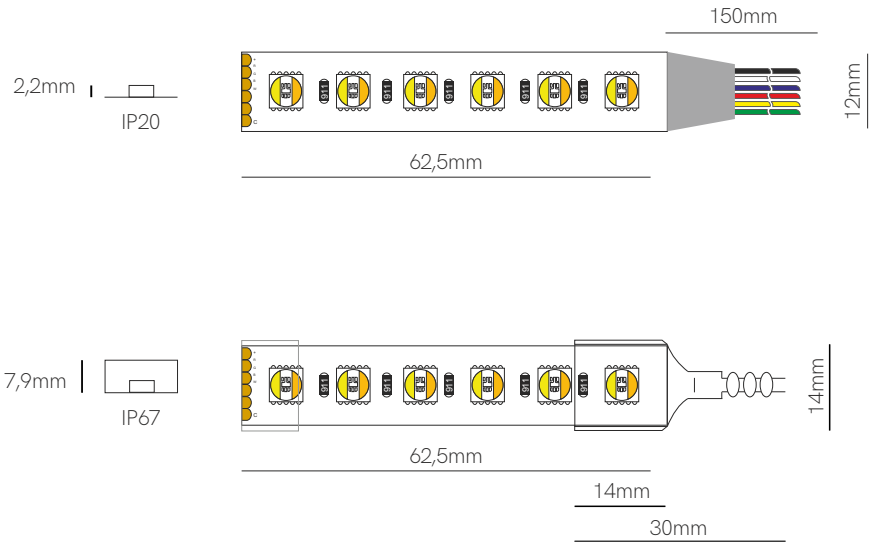

Compatible profiles.



Technical Information

V / A / W	24V / 0,875A / 21W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	71470	29-117 lm/w	70-1.555 lm/m	RGB-WW 2.700K 6000K	IP20
	71477	29-117 lm/w	70-1.555 lm/m	RGB-WW 2.700K 6000K	IP67

Accessories

End Cap
☐ 32635

End Cap
☐ 32625

*Available in reel of 5 meters.

Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 21 W/m | 96 LED/m | 24 VDC | 62,5mm | 5050

Fine 47



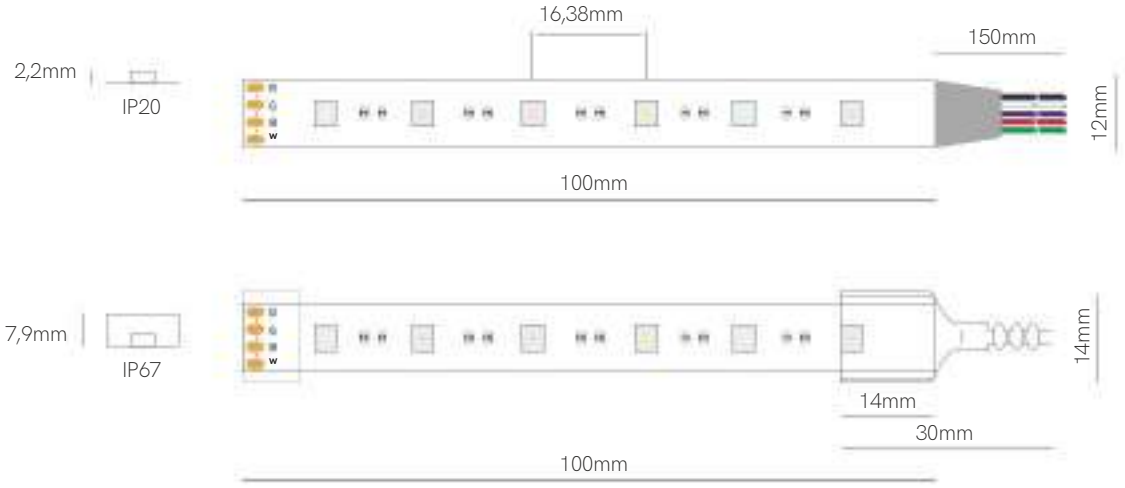

Compatible profiles.

Technical Information

V / A / W	24V / 0,6A / 14,4W/m

Code	Lumens/w	Lumens/m	CCT	IP
47430	18-60 lm/w	260-864 lm/m	RGB-W 3.000K	IP20
47440	18-60 lm/w	260-864 lm/m	RGB-W 4.000K	IP20
47437	18-60 lm/w	260-864 lm/m	RGB-W 3.000K	IP67
47447	18-60 lm/w	260-864 lm/m	RGB-W 4.000K	IP67

Accessories

End Cap
32635

End Cap
32625



Joint
13,5x13,73x4,2mm
20150



Joint
13,5x13,55x4,8mm
20250

*Available in reel of 5 or 25 meters.

Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 14,4 W/m | 60 LED/m | 24 VDC | III | 100mm | 5050

Fine 45





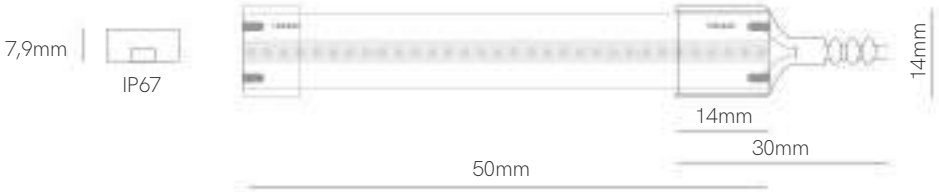

Compatible profiles.



Technical Information

V / A / W	24V / 0,41A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	45220	15	150	RED	IP20
	45310	91	910	GREEN	IP20
	45520	13	130	BLUE	IP20
	45227	15	150	RED	IP67
	45317	91	910	GREEN	IP67
	45527	13	130	BLUE	IP67

Accessories



End Cap 32635 | End Cap 32625 | Clip 31709 | Clip 31809 | Joint 31909

*Available in reel of 10 meters.

Accessories pages 317-319.

CE RoHS

5 YEARS WARRANTY | 10 W/m | 480 LED/m | 24 VDC | III | 50 mm | CSP

Running led strip

▶ VIDEO

Running is the new digital LED strip that provides a new generation of lighting, simulating the movement of light known as running or chase effect, along the strip.
Based on pixel by pixel control, its LEDs turn on and off sequentially, generating a displacement of light that causes a more pleasant and dynamic visual experience in space.
We do have 2 controllers, SP6329 RF control with 14 different scenes and speed control, and another controller SP9812 developed by Beneito & Faure, standard push button control, with which it is possible to adjust the speed of the scenes, the direction in one direction or another of the light and the intensity. Our system is very versatile, adapting to the size of the installations, it can control up to 1024 pixels.









Running es la nueva tira de LED digital que proporciona una iluminación de nueva generación, simulando el movimiento de la luz conocido como efecto running o chase, a lo largo de la tira. Basado en el control pixel a pixel, sus LEDs se encienden y apagan secuencialmente, generando un desplazamiento de la luz que provoca una experiencia visual más agradable y dinámica en el espacio.
Disponemos de 2 controladores, SP6329 control RF con 14 escenas diferentes y control de velocidad, y otro controlador SP9812 desarrollado por Beneito & Faure, control por pulsador estándar, con el cual es posible ajustar la velocidad de las escenas, la dirección en un sentido u otro de la luz y la intensidad. Nuestro sistema es muy versátil, adaptándose al tamaño de las instalaciones, puede controlar hasta 1024 pixels.

Fine running

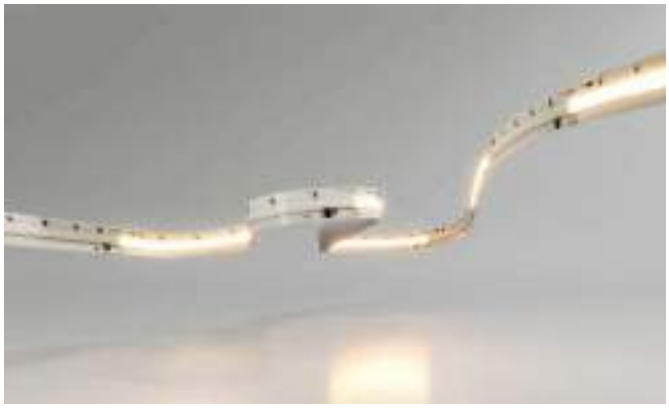

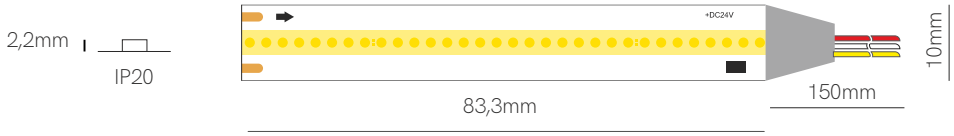

Compatible profiles.



Technical Information

V / A / W	24V / 0,5A / 12W/m
IC	WS2811 (12px/m)

Code	Code	Lumens/w	Lumens/m	CCT	IP
SP1270	New	75 lm/w	900 lm/m	2700K	IP20
SP1300		79 lm/w	950 lm/m	3000K	IP20
SP1400		87 lm/w	1.050 lm/m	4000K	IP20

*Available in reel of 5 meters. Accessories pages 317-319.

Control

	Code	Version	Power Max	Pixels Max	VDC IN
	SP-9812	Controller	-	-	24 VDC
	SP-6329	Running Touch Controller	8A	1.024	24 VDC

CE RoHS

3 YEARS WARRANTY | 12 W/m | 360 LED/m | CRI ≥90 | 24 VDC | 83,3mm | SPI | COB



Fine SPI-2



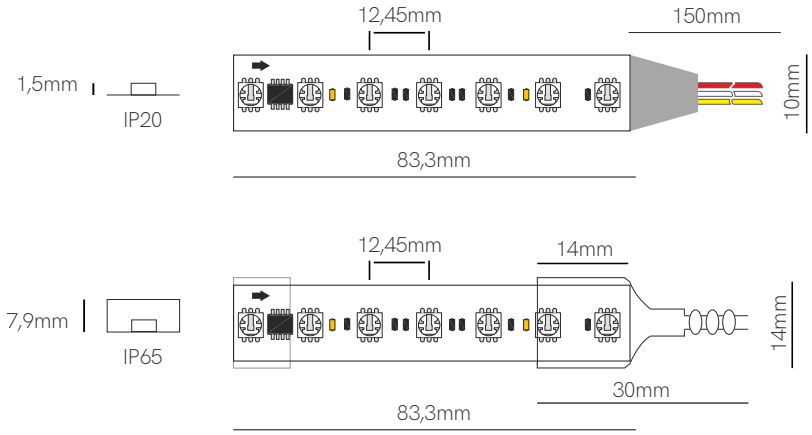

Compatible profiles.



Technical Information

V / A / W	24V / 0,58A / 14W/m
IC	SM16703PB (12px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP2430	37 lm/w	515 lm/m	RGB	IP20
	SP2435	37 lm/w	515 lm/m	RGB	IP65

Accessories

End Cap ☐ 32635

End Cap ☐ 32625

*Available in reel of 5 meters.

Control accessories pages 323/338. Accessories pages 317-319.

CE RoHS | 3 YEARS WARRANTY | 14 W/m | 84 LED/m | III | 24 VDC | 83,3mm | SPI | 5050


aramco
aramco
aramco
aramco

Fine SPI-3

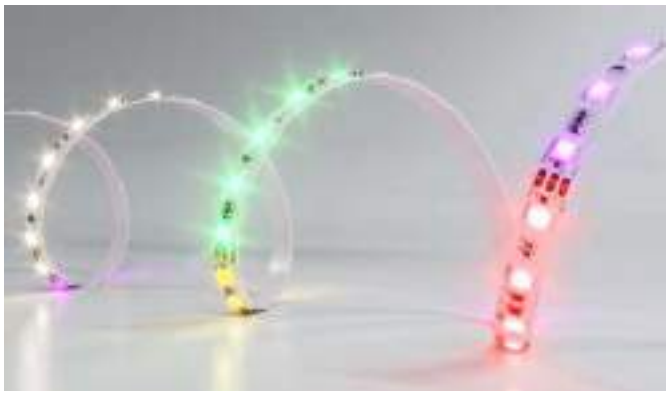

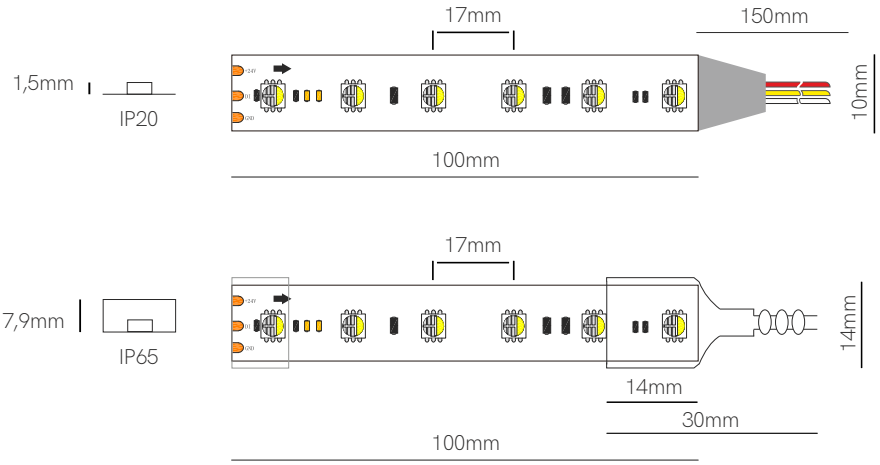

Compatible profiles.



Technical Information

V / A / W	24V / 0,45A / 11W/m
IC	SK6812 12MA (10px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP3470	51 lm/w	561 lm/m	RGB-W 3.000K	IP20
	SP3475	51 lm/w	561 lm/m	RGB-W 3.000K	IP65

Accessories

End Cap ☐ 32635

End Cap ☐ 32625

*Available in reel of 5 meters.

Control accessories pages 323/338. Accessories pages 317-319.

CE RoHS | 3 YEARS WARRANTY | 11 W/m | 60 LED/m | III | 24 VDC | 100mm | SPI | 5050

Fine SPI-4

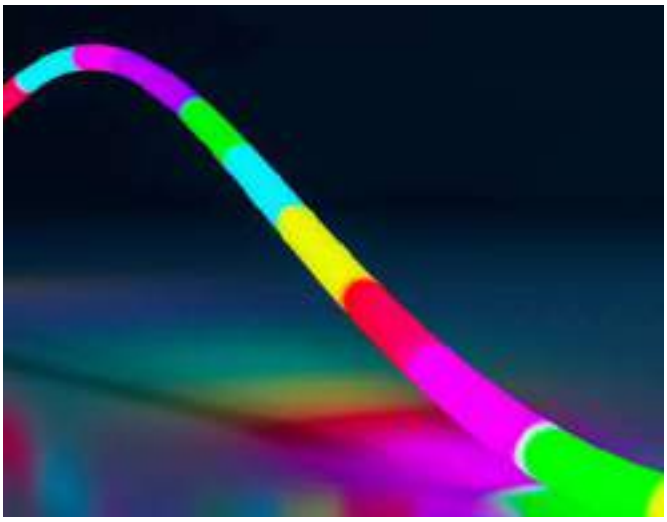

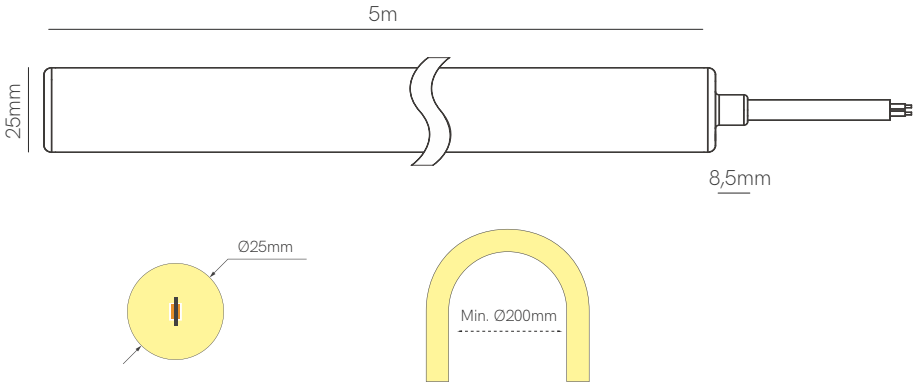

Technical Information

V / A / W	24V / 0,83A / 20W/m
IC	SK6812 12MA (12px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP4437	12,5 lm/w	250 lm/m	RGB	IP67

Accessories



End Cap	End Cap	Initial roof Cap	Clip	Initial Cap	Initial Cap	Tube	Joint with base	Suspension kit
○ 25627	○ 25657-1 ● 25657-2 ○ 25657	○ 25997-1 ● 25997-2 ○ 25997	○ 25530	○ 25667-1 ● 25667-2 ○ 25667	○ 25637	○ 25450	○ 25227-1 ● 25227-2 ○ 25227	○ 25887

*Available in reel of 5 meters. Control accessories pages 323/338. Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 20 W/m | 168 LED/m | 24 VDC | 83,3mm | SPI | 5050

New

Fine SPI-5



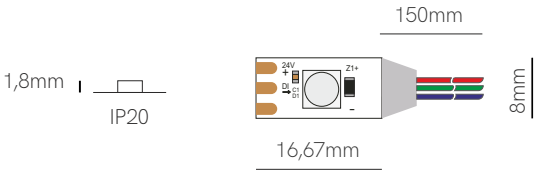

Compatible profiles.



Technical Information

V / A / W	24V / 0,50A / 12W/m
IC	WS2815P (60px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP5470	48 lm/w	576 lm/m	RGB	IP20

*Available in reel of 5 meters.
Control accessories pages 323/338. Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 12 W/m | 60 LED/m | 24 VDC | 16,67mm | SPI | LM-80 | 5050


▶ VIDEO

Fine DMX-4

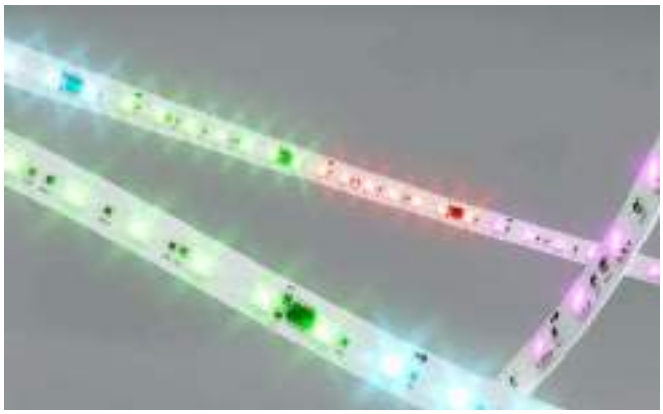

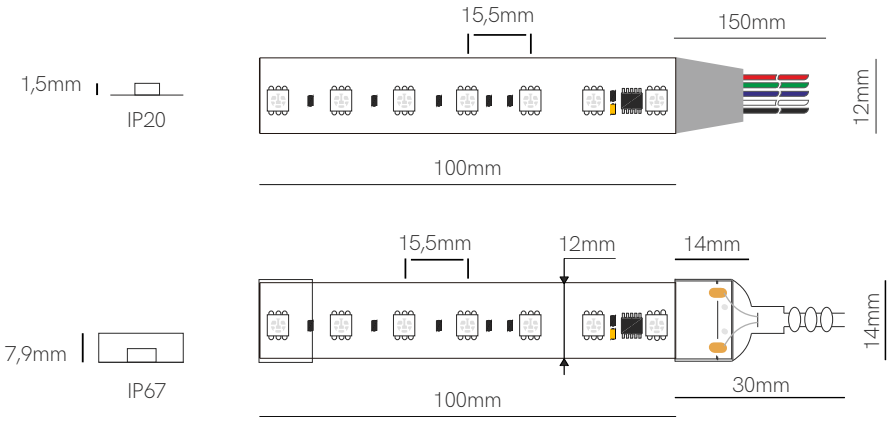

Compatible profiles.



Technical Information

V / A / W	24V / 0,5A / 12W/m
IC	SM18512PS (10px/m)

	Code	Lumen/w	Lumen/m	CCT	IP
Code	DM4430	42 lm/w	503 lm/m	RGB	IP20
	DM4437	42 lm/w	503 lm/m	RGB	IP67

Accessories

End Cap
32635

End Cap
32625

*Available in reel of 5 meters.

Control accessories page 338. Accessories pages 317-319.

CE RoHS | 3 YEARS WARRANTY | 12 W/m | 70 LED/m | III | 24 VDC | 100mm | DMX | 5050



Fine DMX-5



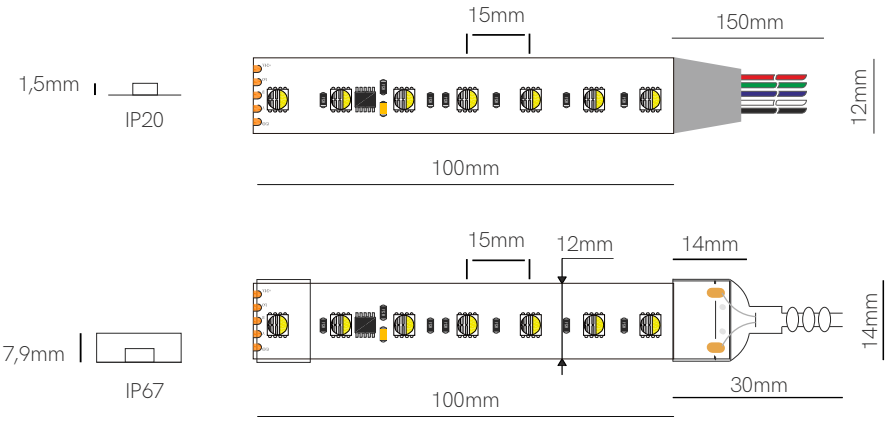

Compatible profiles.



Technical Information

V / A / W	24V / 0,7A / 17W/m
IC	SM18512PS (10px/m)

	Code	Lumen/w	Lumen/m	CCT	IP
Code	DM5470	50 lm/w	861 lm/m	RGB-W 3.000K	IP20
	DM5477	50 lm/w	861 lm/m	RGB-W 3.000K	IP67

Accessories

End Cap
☐ 32635

End Cap
☐ 32625

*Available in reel of 5 meters.

Control accessories page 338. Accessories pages 317-319.

CE RoHS | 3 YEARS WARRANTY | 17 W/m | 70 LED/m | 24 VDC | 100mm | DMX | 5050

NEON IP67 LED Strips

Beneito Faure's 24V flexible neon strips allow you to choose between different light powers, protections, densities and lengths, while maintaining the safety and durability of low voltage installations.

The lighting needs for the nautical industry require a customized and high-performance solution.

All Beneito Faure neon strips have a certificate of resistance to corrosion, resistance to saline alkalis and anti-UV resistance, in addition to an ingress protection of IP67.

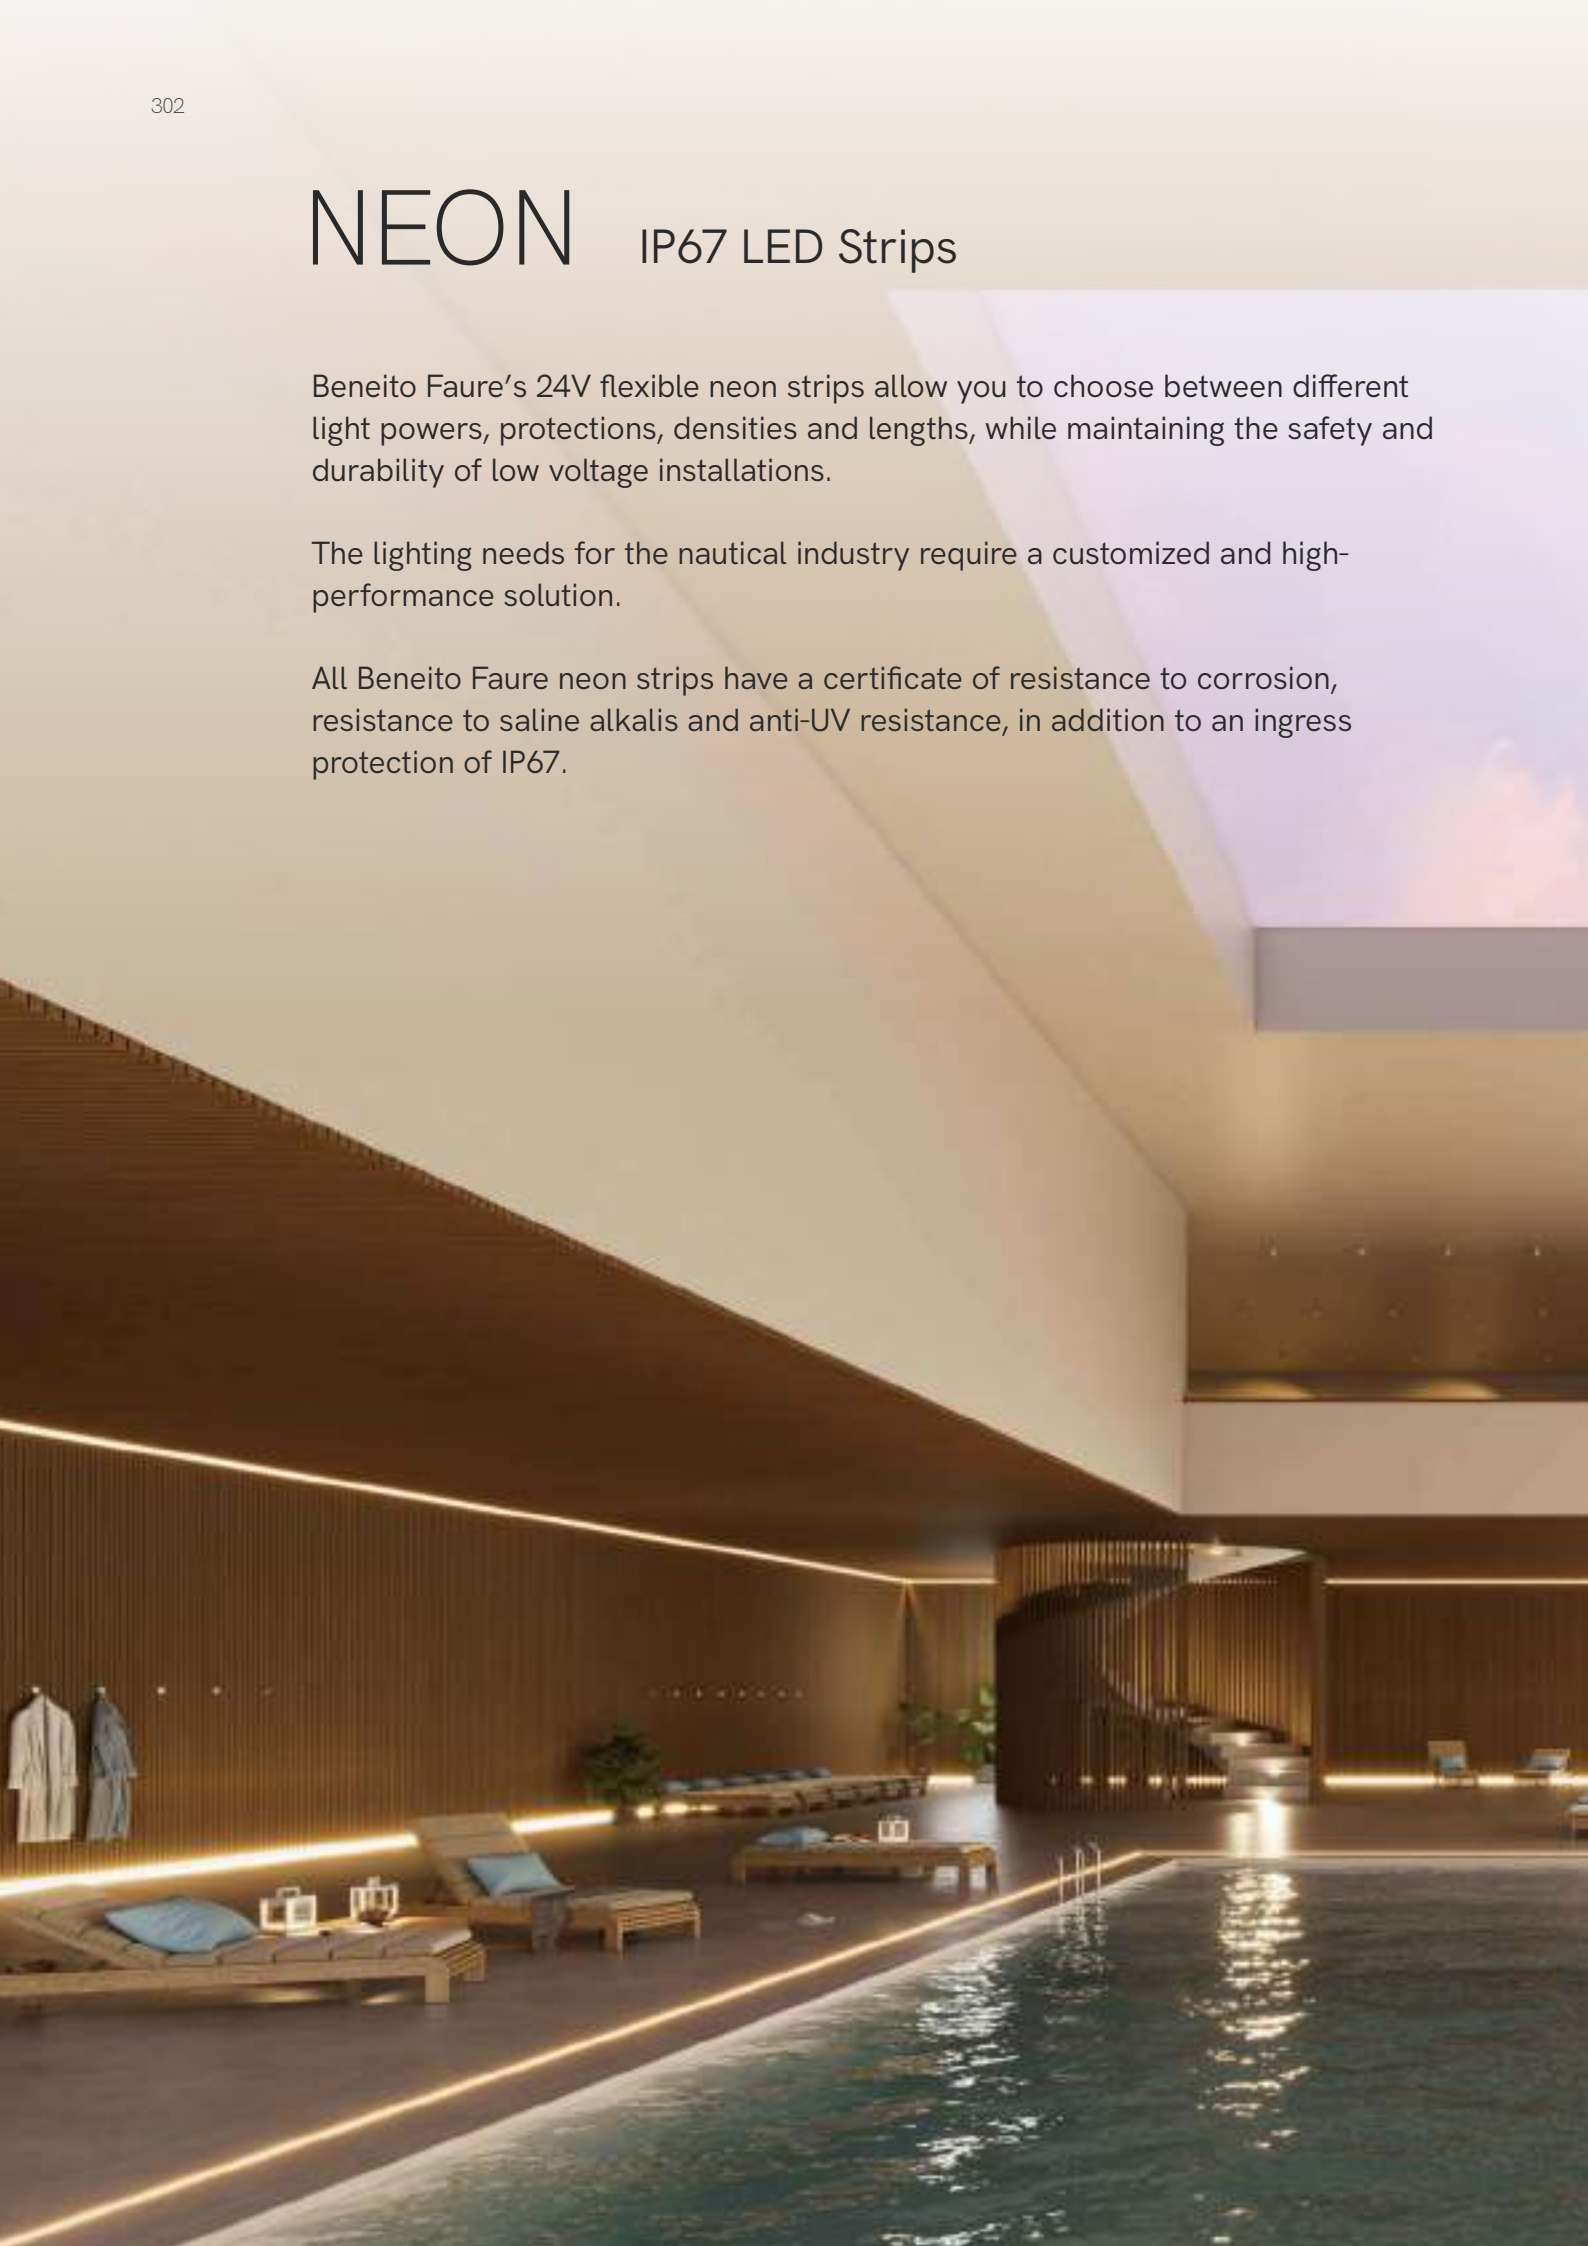

Las tiras flexibles neón de Beneito Faure de 24V permiten elegir entre diferentes rendimientos lumínicos, protecciones, densidades y longitudes, manteniendo la seguridad y la vida útil de las instalaciones de baja tensión.

Las necesidades de iluminación para el sector náutico requieren una solución personalizada y de alto rendimiento.

Todas las tiras neón de Beneito Faure tienen el certificado de resistencia a la corrosión, resistencia a los álcalis salinos y resistencia anti UV, además de un índice de protección lumínico de IP67.





FITSEVENELEVEN®, Club Frankfurt Airport.

Fine 25

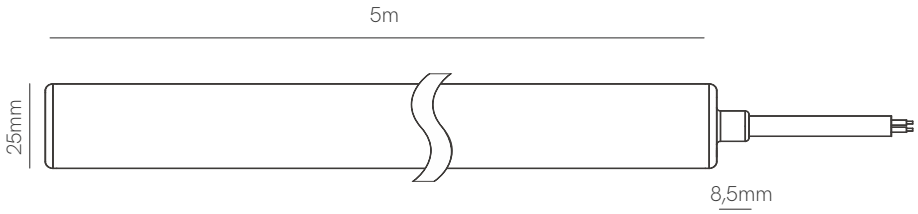





Technical Information

V / A / W	24V / 0,83A / 20W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	25247	60 lm/w	1.200 lm/m	2400K	IP67
	25277	65 lm/w	1.300 lm/m	2700K	IP67
	25307	69 lm/w	1.380 lm/m	3000K	IP67
	25407	73 lm/w	1.460 lm/m	4000K	IP67
	25367	55 lm/w	1.100 lm/m	2700K-4200K	IP67
	25467	41 lm/w	820 lm/m	RGB	IP67

*Available in reels of 1,5 m, 3 m and 5 meters.

Accessories

End Cap
○ 25627



End Cap
○ 25657-1
● 25657-2
○ 25657



Initial roof Cap
○ 25997-1
● 25997-2
○ 25997



Clip
○ 25530



Initial Cap
○ 25667-1
● 25667-2
○ 25667



Initial Cap
○ 25637

Tube
○ 25450



Joint with base
○ 25227-1
● 25227-2
○ 25227



Suspension kit
○ 25887

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 20 W/m | 320 LED/m | 480 LED/m (CCT) | 240 LED/m (RGB) | 24 VDC | 10mm / 50mm (CCT-RGB) | LM-80 | 2835 | 4040 (RGB) | CRI ≥90



Fine 34







Technical Information

V / A / W	24V / 0,21A / 5W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	34277	28 lm/w	140 lm/m	2700K	IP67
	34307	30 lm/w	150 lm/m	3000K	IP67
	34407	32 lm/w	160 lm/m	4000K	IP67

Accessories

End Cap
☐ 34627

End Cap
☐ 34637



Clip
1000x5,8x5mm
☐ 34119

*Available in reel of 10 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 5 W/m | 196 LED/m | 24 VDC | 35,7mm | LM-80 | 2216 | CRI ≥90



Fine 77



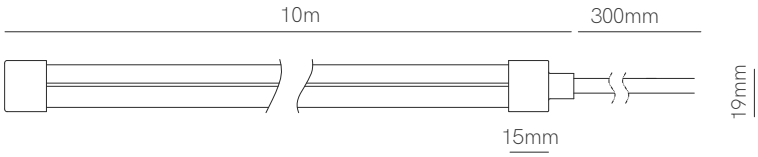





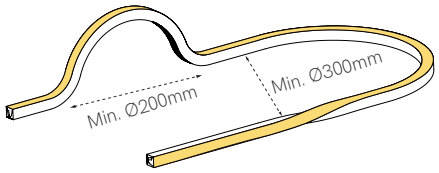

Technical Information

V / A / W	24V / 0,33A / 12W/m / 8W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	77277	50 lm/w	600 lm/m	2700K	IP67
	77307	51 lm/w	612 lm/m	3000K	IP67
	77407	55 lm/w	660 lm/m	4000K	IP67
	77437	26 lm/w	208 lm/m	RGB	IP67

Accessories



End Cap ☐ 77627
End Cap ☐ 77967
End Cap ☐ 77997
End Cap ☐ 77637
Clip 30x18x18mm ☐ 77580
Clip 1000x18x18mm ☐ 77819
Clip 1000x18x18mm ☐ 77953

*Available in reel of 10 meters. Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 12 W/m | 8 W/m (RGB) | 120 LED/m | 24 VDC | III | 50mm | LM-80 | 2835 | 4040 (RGB) | CRI ≥90



Fine 70

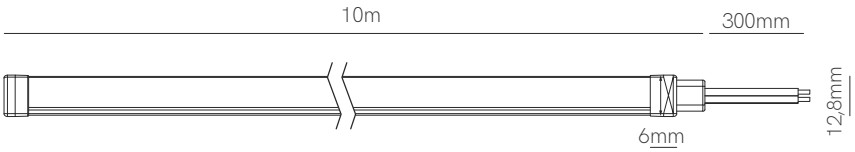





Technical Information

V / A / W	24V / 0,20A / 5W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	70277	31 lm/w	155 lm/m	2700K	IP67
	70307	35 lm/w	175 lm/m	3000K	IP67
	70407	37 lm/w	185 lm/m	4000K	IP67
	70437	15 lm/w	75 lm/m	RGB	IP67

Accessories

End Cap
☐ 70627

End Cap
☐ 70967

End Cap
☐ 70637



Clip
19,7x8x13mm
☐ 70330



Clip
1000x8x13mm
☐ 70119



Clip
1000x7,5x12,5mm
☐ 70350

*Available in reel of 10 meters.

Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 5 W/m | 140 LED/m | 96 LED/m (RGB) | 24 VDC | 50mm | LM-80 | 2835 | 4040 (RGB) | CRI ≥90



Fine 72

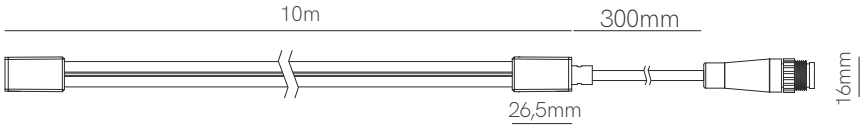





Technical Information

V / A / W	24V / 0,41A / 10W/m

Code	Lumens/w	Lumens/m	CCT	IP
72277	59 lm/w	590 lm/m	2700K	IP67
72307	62 lm/w	620 lm/m	3000K	IP67
72407	65 lm/w	650 lm/m	4000K	IP67
72437	26 lm/w	260 lm/m	RGB	IP67

Accessories



End Cap
- ☐ 72967-L2
- ☐ 72967-L4



End Cap
- ☐ 72967-2
- ☐ 72967-4



End Cap
- ☐ 72627-2
- ☐ 72627-4



End Cap
- ☐ 72637



Clip 20,2x14x14mm
- ☐ 77530



Clip 1000x14x14mm
- ☐ 77519



Clip 1000x14x18mm
- ☐ 77350



Extension cable
- ● 77946 (Mono)
- ● 77920 (RGB)

*Available in reel of 10 meters. Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 10 W/m | 140 LED/m | 96 LED/m (RGB) | 24 VDC | III | 50mm / 62,5mm (RGB) | LM-80 | 2835 | 4040 (RGB) | CRI ≥90



Fine 74

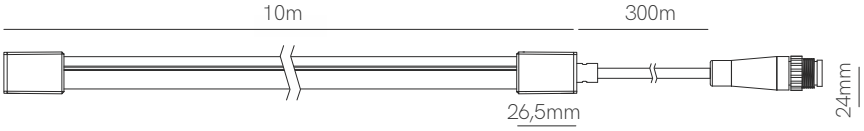





Technical Information

V / A / W	24V / 0,41A / 10W/m

Code	Lumens/w	Lumens/m	CCT	IP
74277	59 lm/w	590 lm/m	2700K	IP67
74307	62 lm/w	620 lm/m	3000K	IP67
74407	65 lm/w	650 lm/m	4000K	IP67
74437	22 lm/w	220 lm/m	RGB	IP67

Accessories



End Cap
- ☐ 74967-L2
- ☐ 74967-L4



End Cap
- ☐ 74967-2
- ☐ 74967-4



End Cap
- ☐ 74627-2
- ☐ 74627-4



End Cap
- ☐ 74637



Clip 20x12,7x18,7mm
- ☐ 77330



Clip 1000x14,5x21,5mm
- ☐ 77119



Clip 1000x13,5x18mm
- ☐ 77350



Extension cable
- ● 77946 (Mono)
- ● 77920 (RGB)

*Available in reel of 10 meters. Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 10 W/m | 140 LED/m | 96 LED/m (RGB) | 24 VDC | 50mm / 55,5mm (RGB) | LM-80 | 2835 | 4040 (RGB) | CRI ≥90

New

Fine 73

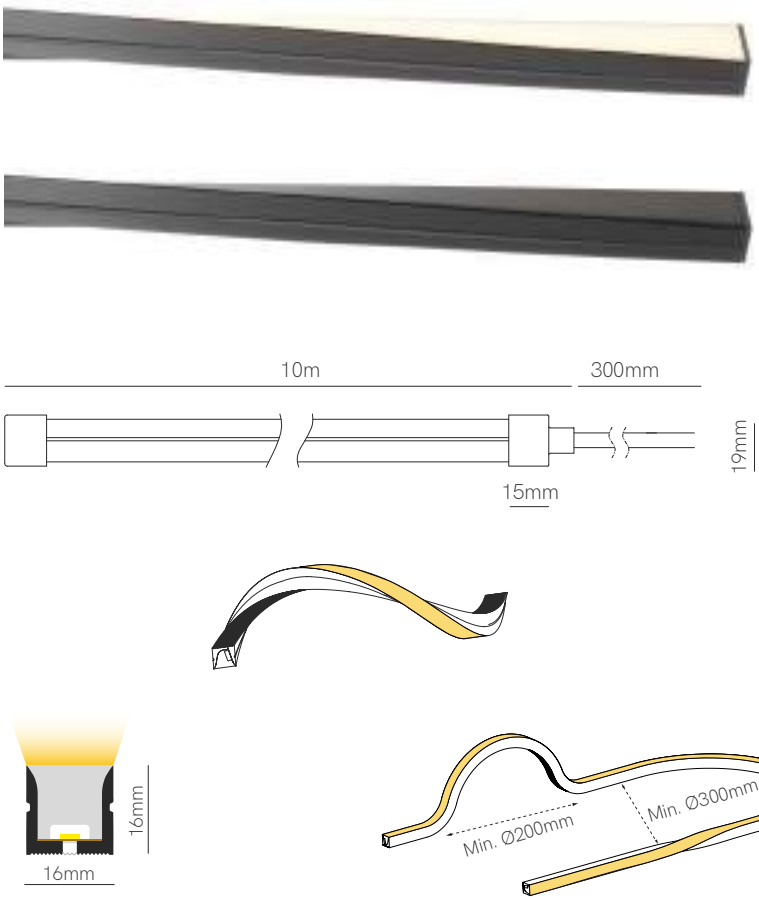

Technical Information

V / A / W	24V / 0,60A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	73277	48 lm/w	691 lm/m	2700K	IP67
	73307	51 lm/w	734 lm/m	3000K	IP67

Accessories



End Cap ■ 73627
End Cap ■ 73967
End Cap ■ 73637
Clip 30x18x18mm ■ 73580
Clip 1000x18x18mm ■ 73819
Clip 1000x18x18mm ■ 73953

*Available in reel of 10 meters. Accessories pages 317-319.

CE RoHS | 5 YEARS WARRANTY | 14,4 W/m | 140 LED/m | 24 VDC | 50mm | LM-80 | 2835 | CRI ≥80

Led strips accessories

Cables



Parallel Cable
2x0,5mm
■ 332



Flat Sheathed Cable
2x0,5mm
○ 332PB



Round Sheathed Cable
2x0,5mm
○ 332RB
● 332RN



Round Sheathed Cable
3x0,5mm
○ 333RB
● 333RN



Parallel Cable
4x0,5mm
■ 334



Round Sheathed Cable
4x0,35mm
○ 334RB
● 334RN



Parallel Cable
5x0,5mm
■ 335



Round Sheathed Cable
5x0,35mm
○ 335RB
● 335RN



Round Sheathed Cable
6x0,22mm
○ 336

SMD / COB 8mm Monocolor IP20



Connector Cable
□ 20818



Joint
□ 20828



L Joint
□ 20838

SMD Fine 81



Joint
□ 20738



Connector Cable
□ 20718



Joint
□ 20728

8mm IP67



End cap
□ 20825



End cap
□ 20865

COB 5mm



Connector Cable
□ 20518



Joint
□ 20528

SMD 10mm Monocolor IP20



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999



L Joint
19x12x5mm
☐ 20C90

SMD 10mm Monocolor IP65

End Cap
◯ 20635

End Cap
◯ 20625



Joint
24,3x14,6x7,7mm
☐ 20225



Joint
24,3x14,6x7,7mm
☐ 20125

SMD / COB 8mm Monocolor IP20



L Joint
19x19x5mm
☐ 20T90

Fine 32 / Fine 75 IP65

End Cap
☐ 32635

End Cap
☐ 32625



Connector kit
☐ 32699



Join 180°
☐ 32899



Join 90°
☐ 32499

Clip
☐ 32900

Joint
☐ 32299

SMD / COB 10mm Monocolor IP20



Joint
☐ 31709



Joint
☐ 31809



Joint
☐ 31909



L Joint
19x12x5mm
☐ 20C90



L Joint
19x19x5mm
☐ 20T90

SMD / COB 10mm IP67

End Cap
☐ 32635

End Cap
☐ 32625

SMD 10mm CCT IP20



Joint
13,8x11,55x3,9mm
☐ 20230



Joint
13,55x11,67x4,7mm
☐ 20130

SMD 10mm CCT IP65

End Cap
☐ 20635

End Cap
☐ 20625



Joint
24,3x14,6x7,7mm
☐ 20235



Joint
24,3x14,6x7,7mm
☐ 20135

SMD 10mm RGB IP20



Joint
13,54x11,7x4,1mm
☐ 20240



Joint
13,56x13,46x4,7mm
☐ 20140

SMD 10mm RGB IP65

End Cap
○ 20635

End Cap
○ 20625



Joint
24,3x14,6x7,68mm
☐ 20245



Joint
24,3x14,6x7,68mm
☐ 20145

SMD 12mm RGBW IP20



Joint
13,5x13,73x4,2mm
☐ 20150



Joint
13,5x13,55x4,8mm
☐ 20250

COB 12mm RGBW IP20



Connector cable
☐ 20066



Joint
☐ 20266

SMD 5mm Monocolor IP20



Connector Cable
☐ 20049



Joint
☐ 20249

Single-wire connections



20917



20915

Bipolar connections



20927



20925

FINE 20	0,50 mm	1,00 mm	–	–	–
FINE 25	0,75 mm	1,50 mm	–	–	–
FINE 26	0,75 mm	–	–	–	–
FINE 30	1,00 mm	–	–	–	–
FINE 31	0,50 mm	1,00 mm	–	–	–
FINE 32N	0,50 mm	0,50 mm	1,00 mm	1,00 mm	1,50 mm
FINE 34	0,35 mm	0,35 mm	0,50 mm	0,75 mm	–
FINE 36	0,50 mm	1,00 mm	–	–	–
FINE 37	0,50 mm	0,50 mm	1,00 mm	1,00 mm	1,50 mm
FINE 41	0,50 mm	0,75 mm	1,50 mm	–	–
FINE 42	0,50 mm	1,00 mm	–	–	–
FINE 43	0,50 mm	1,00 mm	–	–	–
FINE 44	0,50 mm	0,75 mm	–	–	–
FINE 45	0,35 mm	0,50 mm	0,75 mm	–	–
FINE 46	0,50 mm	0,75 mm	1,50 mm	–	–
FINE 47	0,35 mm	0,75 mm	1,50 mm	–	–
FINE 48	0,35 mm	0,35 mm	0,50 mm	–	–
FINE 49	0,50 mm	–	–	–	–
FINE 50	0,35 mm	–	–	–	–
FINE 51	0,50 mm	0,75 mm	1,00 mm	1,50 mm	–
FINE 52	0,75 mm	1,50 mm	–	–	–
FINE 54	0,50 mm	0,75 mm	–	–	–
FINE 55	1,00 mm	–	–	–	–
FINE 56	0,75 mm	1,50 mm	–	–	–
FINE 60	0,35 mm	0,50 mm	–	–	–
FINE 61	0,50 mm	0,75 mm	–	–	–
FINE 63	0,50 mm	1,00 mm	–	–	–
FINE 64	0,35 mm	0,35 mm	0,50 mm	–	–
FINE 66 N	0,75 mm	1,50 mm	–	–	–
FINE 68	0,50 mm	1,00 mm	–	–	–
FINE 69	0,50 mm	0,75 mm	1,00 mm	–	–
FINE 70	0,35 mm	0,50 mm	0,75 mm	–	–
FINE 71	0,75 mm	1,50 mm	–	–	–
FINE 72	0,50 mm	0,75 mm	–	–	–
FINE 73	0,50 mm	0,75 mm	–	–	–
FINE 74	0,50 mm	0,75 mm	–	–	–
FINE 75	0,35 mm	0,50 mm	0,75 mm	–	–
FINE 76	0,50 mm	0,75 mm	1,00 mm	–	–
FINE 77	0,50 mm	1,00 mm	–	–	–
FINE 79	0,35 mm	0,75 mm	1,00 mm	–	–
FINE 81	0,75 mm	1,50 mm	–	–	–
FINE 82	0,50 mm	0,75 mm	1,00 mm	–	–
FINE 84	0,35 mm	0,35 mm	0,50 mm	0,75 mm	–
FINE 86	0,75 mm	1,50 mm	–	–	–
FINE 88	0,50 mm	1,00 mm	–	–	–
FINE 90	0,50 mm	0,75 mm	1,00 mm	–	–
FINE 91	0,50 mm	1,00 mm	–	–	–
FINE 92	0,35 mm	0,75 mm	1,00 mm	–	–
FINE 96	0,50 mm	1,00 mm	–	–	–
FINE 97	0,50 mm	0,75 mm	1,00 mm	–	–
DMX-4 / DMX5	0,50 mm	–	–	–	–
FINE RUNNING	0,50 mm	–	–	–	–
SPI-2 / SPI-3	0,50 mm	–	–	–	–
SPI-4 / SPI-5	0,75 mm	–	–	–	–

*Cable section.

Light perception

	Open circuit					Back feed				
										
	5 mts	10 mts	15 mts	20 mts	25 mts	5 mts	10 mts	15 mts	20 mts	25 mts
FINE 20	100%	87%	–	–	–	100%	98%	–	–	–
FINE 25	100%	–	–	–	–	–	–	–	–	–
FINE 26	100%	–	–	–	–	–	–	–	–	–
FINE 30	100%	–	–	–	–	–	–	–	–	–
FINE 31	100%	90%	–	–	–	100%	95%	–	–	–
FINE 32N	100%	98%	95%	92%	90%	–	–	–	–	–
FINE 34	100%	100%	–	–	–	–	–	–	–	–
FINE 36	100%	86%	–	–	–	100%	93%	–	–	–
FINE 37	100%	100%	100%	95%	90%	100%	100%	100%	100%	100%
FINE 41	100%	80%	70%	–	–	100%	94%	90%	–	–
FINE 42	100%	87%	–	–	–	100%	93%	–	–	–
FINE 43	100%	–	–	–	–	100%	98%	–	–	–
FINE 44	100%	80%	–	–	–	100%	94%	–	–	–
FINE 45	100%	80%	70%	–	–	100%	94%	85%	–	–
FINE 46	100%	80%	70%	–	–	100%	94%	90%	–	–
FINE 47	100%	80%	70%	–	–	100%	95%	90%	–	–
FINE 48	100%	100%	85%	–	–	100%	100%	96%	–	–
FINE 49	100%	–	–	–	–	–	–	–	–	–
FINE 50	100%	–	–	–	–	–	–	–	–	–
FINE 51	100%	100%	100%	100%	–	–	–	–	–	–
FINE 52	100%	90%	–	–	–	100%	98%	–	–	–
FINE 54	100%	80%	–	–	–	100%	90%	–	–	–
FINE 55	100%	80%	–	–	–	100%	95%	–	–	–
FINE 56	100%	80%	–	–	–	100%	95%	–	–	–
FINE 60	100%	90%	–	–	–	100%	98%	–	–	–
FINE 61	100%	90%	80%	–	–	100%	98%	92%	–	–
FINE 63	100%	80%	–	–	–	100%	92%	–	–	–
FINE 64	100%	100%	90%	–	–	100%	100%	96%	–	–
FINE 66 N	100%	88%	–	–	–	100%	95%	–	–	–
FINE 68	100%	95%	–	–	–	100%	100%	–	–	–
FINE 69	100%	95%	90%	85%	–	100%	100%	95%	95%	–
FINE 70	100%	–	–	–	–	–	–	–	–	–
FINE 71	100%	87%	–	–	–	100%	97%	–	–	–
FINE 72	100%	–	–	–	–	–	–	–	–	–
FINE 73	100%	87%	–	–	–	–	–	–	–	–
FINE 74	100%	–	–	–	–	–	–	–	–	–
FINE 75	100%	98%	95%	92%	90%	–	–	–	–	–
FINE 76	100%	80%	70%	–	–	100%	95%	90%	–	–
FINE 77	100%	–	–	–	–	–	–	–	–	–
FINE 79	100%	90%	85%	–	–	100%	97%	95%	–	–
FINE 81	100%	87%	–	–	–	100%	97%	–	–	–
FINE 82	100%	100%	85%	–	–	100%	100%	90%	–	–
FINE 84	100%	95%	90%	85%	–	100%	100%	95%	95%	–
FINE 86	100%	88%	–	–	–	100%	95%	–	–	–
FINE 88	100%	–	–	–	–	–	–	–	–	–
FINE 90	100%	90%	80%	–	–	100%	98%	93%	–	–
FINE 91	100%	87%	–	–	–	100%	98%	–	–	–
FINE 92	100%	100%	85%	–	–	100%	100%	90%	–	–
FINE 96	100%	80%	–	–	–	100%	95%	–	–	–
FINE 97	100%	95%	90%	–	–	100%	100%	95%	–	–
DMX-4 / DMX-5	100%	–	–	–	–	–	–	–	–	–
FINE RUNNING	100%	–	–	–	–	–	–	–	–	–
SPI-2 / SPI-3	100%	–	–	–	–	–	–	–	–	–
SPI-4 / SPI-5	100%	–	–	–	–	–	–	–	–	–

*Efficiency (%).


VIDEO

Dynamic control





Stair light controller with dual PIR sensor + double push button (up & down), and daytime detection function. Controls a maximum of 32 steps.

Controlador de iluminación para escaleras con sensor PIR dual, doble pulsador (subir y bajar) y función de detección de luz diurna. Controla hasta 32 escalones.

PIR stair light controller (single color led strip)

Code	VDC IN	VDC OUT	Output current	Output power	Sensitive field	Sensitive angle
85732 ☐	5-24VDC	32 x (5-24)VDC	32CH,1A/CH	32 x (5-24)W	⩽3m	30° (±10°)





Stair light controller / SPI led scenes + double push button (up & down). Controls speed and brightness. Suitable for multiple ICs.

Controlador de iluminación para escaleras / Escenas LED SPI + doble pulsador (subir y bajar).
Controla la velocidad y el brillo. Compatible con múltiples circuitos integrados.

SPI light controller (RGB or white light led pixel strip)

Code	VDC IN	Input current	Output signal	Pixel number
85769 ☐	5-24VDC	15A	2 X SPI(TTL)	Max 960





Stair light controller / SPI led scenes with dual PIR sensor + double push button (up&down), and daylight detection function. Suitable for multiple ICs.

Controlador de iluminación para escaleras / Escenas LED SPI con sensor PIR dual + pulsador doble (subir/bajar) y función de detección de luz diurna.
Compatible con múltiples circuitos integrados.

SPI light controller stairs / scenes (RGB or white light led pixel strip)

Code	VDC IN	Input current	Output signal	Pixel number	Sensitive field	Sensitive angle
85753 ☐	5-24VDC	15A	2 X SPI(TTL)	Max 960	⩽3m	30° (±10°)

CE RoHS

5 YEARS WARRANTY | IP 20

Smart home solution

On - Off

0% 100%
Dimmable

2.700K 5.000K
CCT

Light color

Group

50%
3.500K
Scenes

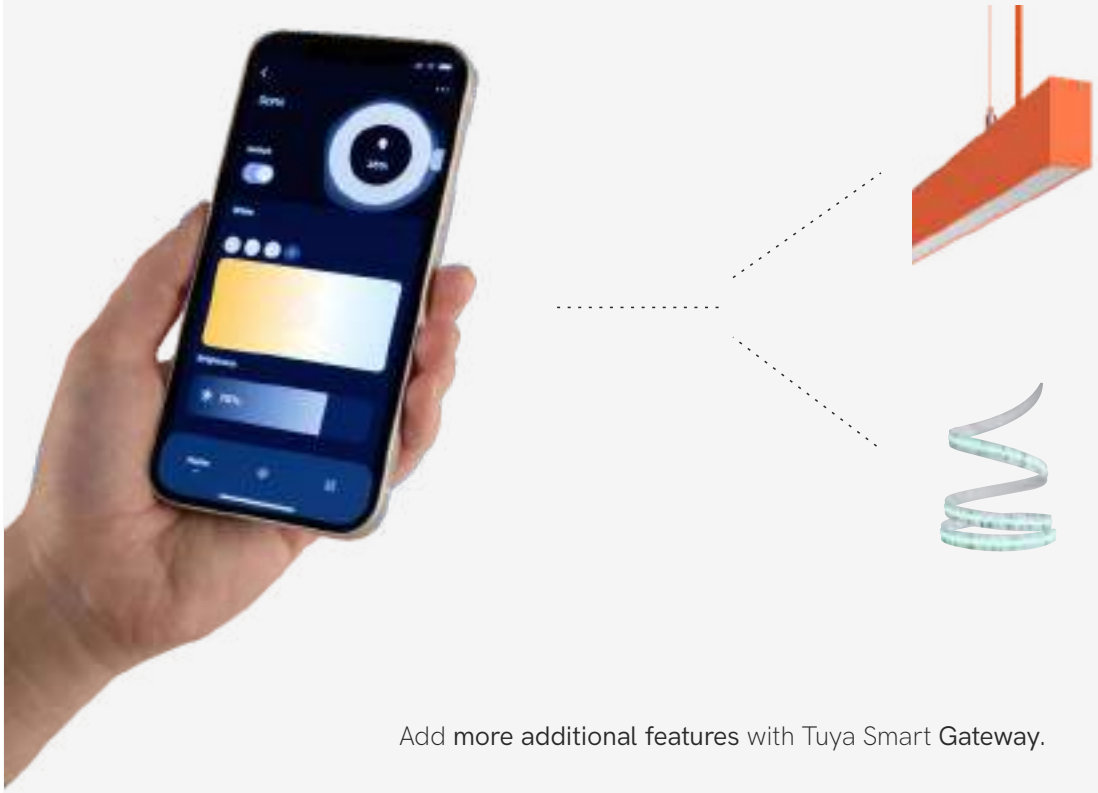

Add **more additional features** with Tuya Smart **Gateway**.

Schedule day and time

Control from anywhere via internet

Voice control with Alexa

Voice control with Google Home



All products with Tuya logo can have these functions.

CASAMBI

Professional solution



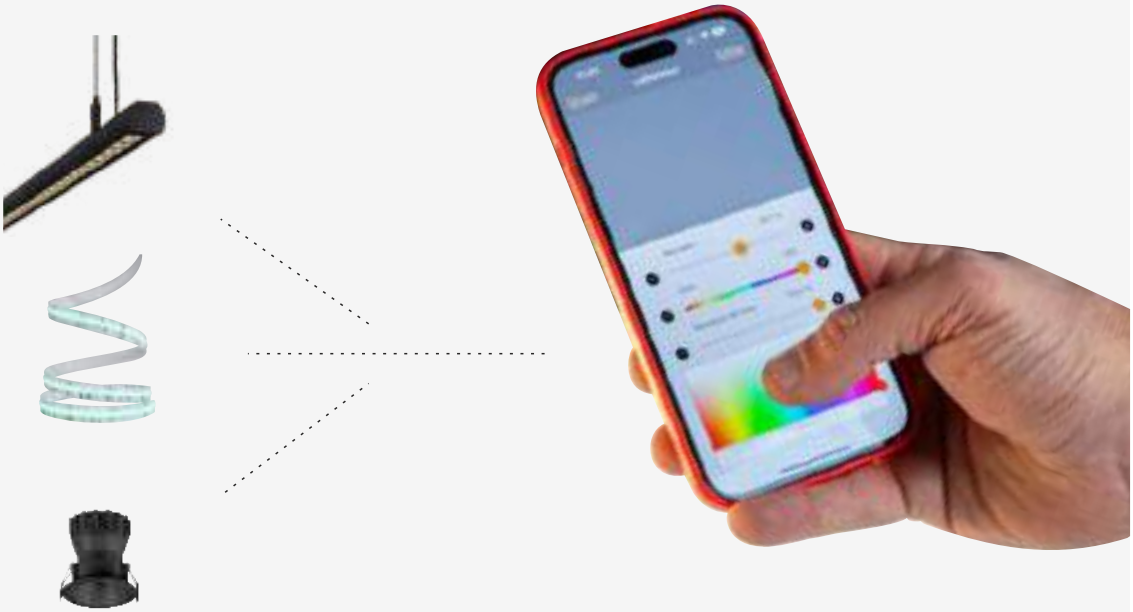

Add **more additional features** with Casambi Smart **Gateway**.

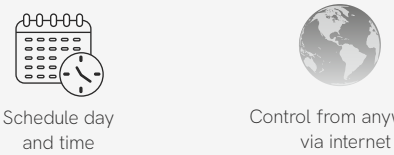



All products with Casambi logo can have these functions.

1. 
2. 
3. 
4. 
5. 

6. 
7. 
8. 
9. 
10. 
11. 

12. 
13. 
14. 
15. 

RF Control

	Code		Version	Power Max	VDC IN	Size
1.	85890	■	RF Dimming	-	3VDC (CR2032)	139x36x11mm
2.	85360	■	RF CCT	-	3VDC (CD2032)	139x36x11mm
3.	85460	■	RF RGB	-	3VDC (CR2032)	139x36x11mm
4.	85470	■	RF RGB-W	-	3VDC (CR2032)	139x36x11mm
5.	85990	■	RF RGB+CCT	-	3VDC (CR2032)	139x36x11mm
6.	85894	■	RF Dimming 4 Zones	-	3VDC (CR2032)	138x50x22mm
7.	85364	■	RF CCT 4 Zones	-	4,5 VDC (3xAAA)	120x55x17mm
8.	85475	■	RF RGB-W 4 Zones	-	4,5 VDC (3xAAA)	120x55x17mm
9.	85995	■	RF RGB+CCT 4 Zones	-	4,5 VDC (3xAAA)	120x55x17mm
10.	84431	□	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
11.	84432	■	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
12.	85144	■	RF Dimming 4 Zone 2 Scenes	-	3VDC (CR2032)	86x86x9,5mm
13.	85244	■	RF CCT 4 Zones 2 Scenes	-	3VDC (CR2032)	86x86x9,5mm
14.	85444	■	RF RGB/RGBW 4 Zones	-	3VDC (CR2032)	86x86x9,5mm
15.	85544	■	RF RGB+CCT 4 Zones	-	3VDC (CR2032)	86x86x9,5mm

RF

1. 
2. 
3. 4. 

Control Tuya

	Code			Version	Power Max	VDC IN	Size
1.	22856	☐		Controller Tuya/RF 5C	5Cx3A	12-24 VDC	114x38x20mm
2.	22821	☐		Controller Push/Tuya RF 2C	2Cx5A	12-36 VDC	114x38x20mm
3.	22570	☐		Controller Push/Tuya/RF 5C	5Cx6A	12-48 VDC	179x56x30mm
4.	22699	☐	NEW	Controller Push/Tuya RF1C	1Cx10/15A	12-48 VDC	175x45x27mm

RF | PUSH | tuya

1. 
2. 
3. 

Mini controller Tuya/RF/Push

	Code			Version	Power Max	VDC IN	Size
1.	22571	☐	NEW	Mini controller Tuya/RF/Push 1C	1C/5A	12-48 VDC	58X35,5X18mm
2.	22573	☐	NEW	Mini controller Tuya/RF/Push 3C	3C/3A	12-24 VDC	58X35,5X18mm
3.	22575	☐	NEW	Mini controller Tuya/RF/Push 5C	5C/2A	12-24 VDC	58X35,5X18mm

☐ | RF | PUSH

1. 
2. 
3. 4. 

Power Push/RF

	Code		Power	IP	VAC IN	VDC OUT	Size
1.	82440	☐	40W	IP20	100-240 VAC	24 VDC	168x44x30mm
2.	82475	☐	75W	IP20	200/240 VAC	24 VDC	179x56x30mm
3.	82415	☐	150W	IP20	110-277 VAC	24 VDC	310x45x30mm

☐ | RF | PUSH

Power Supplies Push/RF/Tuya

	Code		Power	IP	VAC IN	VDC OUT	Size
4.	97415	☐	150W	IP20	100-277 VAC	24 VDC	310x45x30mm

☐ | RF | PUSH | tuya

CE RoHS

3 YEARS WARRANTY



1. 
2. 
3. 
4. 

Control Casambi

	Code	Version	Power Max	VDC IN	Size
1.	59682	Touch Dimmer Casambi 4C Oak/Black	-	-	Ø73x62mm
2.	59689	Touch Dimmer Casambi 4C Oak/Silver	-	-	Ø73x62mm
3.	59182	Touch Dimmer Casambi 4C Mahogany/Black	-	-	Ø73x62mm
4.	59189	Touch Dimmer Casambi 4C Mahogany/Silver	-	-	Ø73x62mm

CASAMBI

5. 

6. 

7. 

8. 

9. 

10. 

11. 

12. 

13. 

14. 

15. 

16. 

Control Casambi

	Code			Version	Power Max	VAC IN	Size
5.	59112	■		Casambi Wall touch panel Black	-	-	146x90x24mm
6.	59847	■		Casambi Touch Control (Includes 24VDC power supply and gateway code 57452)	-	220/230VAC	86x86x26mm
7.	57661	■		Casambi Control 4 buttons + wheel	-	-	66x63mm
8.	59805	□	NEW	Casambi RF Control CCT+RGB 4 Zones	-	-	120x55x17mm
9.	59475	□	NEW	Casambi Touch Panel RGB+CCT White	-	-	86x86x26mm
10.	57241	□		Xpress Casambi White	-	-	90x90x12mm
11.	57242	■		Xpress Casambi Black	-	-	90x90x12mm
12.	57299	□		Casambi Control On/Off, dimming, CCT, scene	-	-	134x36x9mm
13.	59121	□		Wall switch batteryfree 2C White	-	-	81x81x14mm
14.	59122	■		Wall switch batteryfree 2C Anthracite	-	-	81x81x14mm
15.	59141	□		Wall switch batteryfree 4C White	-	-	81x81x14mm
16.	59142	■		Wall switch batteryfree 4C Anthracite	-	-	81x81x14mm

CASAMBI

15. 

16. 

17. 

18. 

19. 

20. 

21. 

22. 

23. 

24. 

25. 

Control Casambi

	Code		Version	Power Max	V IN	Size
15.	57924	■	Controller input 4 button Casambi	-	230 VAC	45x19x17mm
16.	59629	■	Smart Gateway Casambi	-	230 VAC	101x74x29mm
17.	59549	■	Led Strips regulator 5C Casambi/Push	5CX5A	12-48V	186x29x21mm
18.	59733	□	Relay Casambi	10A	-	120x50 x32mm
19.	59777	□	Triac Dimmable Casambi/Push	-	-	Ø52x15,5mm
20.	59249	□	Control CBU-PWM4 long range	4Cx1,5A	12-24 VDC	72,6x30x18mm
21.	59739	■	Relay Casambi	10A	200-240 VAC	35x22x35mm
22.	59519	■	Led Strips regulator 1C Casambi/Push	12A	12-48V	44x57x19mm
23.	59769	□	Controller End of phase long range	0,43A	85-240 VAC	72,6x30x18mm
24.	59789	□	Interface 0-10/1-10 Dali long range	-	220-240 VAC	40,4x36,2x14mm
25.	57588	■	Controller PWM4+Push	4Cx5A	12-24 VDC	88x54x25mm

CASAMBI

26. 

27. 

28. 

29. 

30. 

31. 

32. 

33. 

34. 

Control Casambi

	Code			Version	Power Max	V IN	Size
26.	57881	☐		Presence and illuminance mini sensor recessed White	0,4W	220/240 VAC	38X38X48mm
27.	57882	■		Presence and illuminance mini sensor recessed Black	0,4W	220/240 VAC	38X38X48mm
28.	57666	☐		Presence and illuminance sensor recessed White	0,05A	100-240 VAC	79x85x85mm
29.	57662	☐		Casambi Gateway 2 output 0-10V, 1-10V or 1 DALI	-	100-277 VAC	76x26x23mm
30.	59289	■		Led Strips regulator 2C Casambi/Push	10A	12-48 VDC	136x29x21mm
31.	57452	■		Casambi Gateway 45 profiles 8 groups / 8 scenes	-	100-254 VAC	57x44x25mm
32.	57400	■		Waterproof box 2XM20 for input and output. IP66	-	-	131x68x37mm
33.	57001	■		Timer Casambi	-	12-48 VDC	58x45x25mm
34.	57461	■	NEW	Casambi relay with switched phase	10A	100/240 VAC	44x57x25mm

CASAMBI

CE RoHS

3 YEARS WARRANTY | IP 20

This equipment connects to a DALI bus and allows you to view and control all DALI devices from the CASAMBI APP as if they were CASAMBI devices. Capable of controlling 16/32/64 drivers individually. Supports D4i, DT6 and DT8. Needs an external DALI power supply.

Este equipo se conecta a un bus DALI y permite ver y controlar desde la APP de CASAMBI todos los equipos DALI como si fuesen equipos CASAMBI. Capaz de controlar 16/32/64 drivers de forma individual. Soporta D4i, DT6 y DT8. Necesita fuente de alimentación DALI externa.



DALI to CASAMBI Gateway

Code			Version	Channels	VDC IN	Protocol	Size
59016	☐	NEW	Dali/Casambi Gateway	16CH	9,5/22,5 VDC	D4i-DT6-DT8	40,4x36,3x14mm
59032	☐	NEW	Dali/Casambi Gateway	32CH	9,5/22,5 VDC	D4i-DT6-DT8	40,4x36,3x14mm
59064	☐	NEW	Dali/Casambi Gateway	64CH	9,5/22,5 VDC	D4i-DT6-DT8	40,4x36,3x14mm

Este equipo se conecta a un bus DALI y permite ver y controlar desde la APP de CASAMBI todos los equipos DALI como si fuesen equipos CASAMBI. Capaz de controlar 16/32/64 drivers de forma individual. Soporta D4i, DT6 y DT8. Dispone de fuente DALI Integrada de 130mA. Incorpora reloj en tiempo real con pila para guardar la hora en caso de cortes de alimentación y protección anti-tirones del cableado.

This device connects to a DALI bus, allowing you to monitor and control all DALI units through the CASAMBI APP as if they were native Casambi devices. It is capable of controlling 16/32/64 drivers individually and supports D4i, DT6, and DT8 standards. It features an integrated 130mA DALI power supply. Additionally, it includes a battery-backed real-time clock (RTC) to maintain settings during power outages and built-in cable strain relief.



CASAMBI to DALI Gateway

Code			Version	Channels	VAC IN	Protocol	Size
59216	☐	NEW	Dali/Casambi Gateway	16CH	100-277 VAC	D4i-DT6-DT8	106x67x28mm
59232	☐	NEW	Dali/Casambi Gateway	32CH	100-277 VAC	D4i-DT6-DT8	106x67x28mm
59264	☐	NEW	Dali/Casambi Gateway	64CH	100-277 VAC	D4i-DT6-DT8	106x67x28mm

CE RoHS

3 YEARS WARRANTY | IP 20



Control Casambi RF/Push

Code			Version	Power Max	VDC IN	Size
59020	☐	NEW	Controller Casambi RF/Push 2C	2C/5A	12-24 VDC	117X38X20mm

PUSH | RF | CASAMBI



Control Casambi RF

Code			Version	Power Max	VDC IN	Size
59050	☐	NEW	Controller Casambi RF 5C	5C/3A	12-24 VDC	117X38X20mm

RF | CASAMBI



Control Casambi Running SPI

Code			Version	Power Max	VDC IN	Size
59911	■	NEW	Controller Casambi Running SPI	7A	5-12-24 VDC	136X29X21mm

SPI | CASAMBI



Led Driver CC-Casambi

Code			Version	Power Max	VDC IN	VDC OUT	I OUT	Size
DR-H-42WCAS	☐	NEW	Led Driver CC-Casambi	42W	194-264 VAC	2,5-42 VDC	150-1.050mA	97X43X30mm

CASAMBI

CE RoHS

3 YEARS WARRANTY | IP 20



Control Dali touch

Code		Version	Power Max	VDC IN	Size
29187	■	Controller Dali DT8 2GR/10 scenes	10A	12-24 VDC	86X86X26mm



Control Dali

Code			Version	Power Max	VDC IN	Size
29276	■	NEW	Controller Dali DT8 RGB/RGBW/RGBWW	5x5A (12A Max)	10,8-52,8 VDC	186x29x21mm
29882	■	NEW	Controller Dali DT8 Monocolor/CCT	2x7A (10A Max)	12-24-48 VDC	137x29x21mm



Control Dali Push

Code		Version	Power Max	VDC IN	Size
29777	■	Controller Dali 4CH	10A	12-24 VDC	88x54x26mm



Control Dali Push Triac

Code		Version	Power Max	VAC IN	Size
22948	□	Controller Dali+Push/Triac	1,5A	100-240 VAC	187x46x22mm

CE RoHS

3 YEARS WARRANTY | IP 20



DALI Bus Power Supply

Code			Version	Power Max	VAC IN	Size
29261	■	NEW	DALI Bus Power Supply	15/18 VDC-240mA	90/264 VAC	145x38x22mm

DALI



Control Dali SPI APP

Code		Version	Power Max	VDC IN	Size
29735	■	Controller Dali SPI APP	7A	5-12-24 VDC	120x29x21mm

DALI

1. 

2. 

Control Driver RF / Push

	Code		Version	Power Max	VDC IN	Size
1.	22911	□	Controller 4CH RF Push	3-45 VDC/150-500mA	12-48 VDC	139x36x11mm
2.	22974	□	Controller 4CH RF Push	3-45 VDC/350-1.200mA	12-48 VDC	138x50x22mm

RF | PUSH

1. 

2. 

Control Dali Push

	Code		Version	Power Max	VDC IN	Size
1.	22490	▫	Controller PWM Dali Push 1-10V	12A	12-24-48 VDC	155x51x26mm
2.	22499	▫	Controller PWM Dali Push 1-10V	5A	12-24-48 VDC	132x22x20mm

PUSH | DALI

CE RoHS

3 YEARS WARRANTY | IP 20

LED Strips accessories



Control Basic

	Code		Version	Power Max	VDC IN	Size
1.	90990	☐	RF Mono Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
2.	89260	☐	RF CCT Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
3.	88460	☐	RF RGB Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
4.	91430	☐	RF RGB-W Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
5.	86019	☐	Controller Mono/CCT/RGB Basic	3Cx5A	12-24 VDC	145x46x18mm
6.	87029	☐	Controller RGB-W Basic	5Cx5A	12-24 VDC	145x46x18mm

RF



Control Top

	Code		Version	Power Max	VDC IN	Size
1.	81990	■	RF Mono Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
2.	80260	■	RF CCT Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
3.	79430	■	RF RGB-W Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
4.	77019	☐	Controller Mono/CCT/RGB/RGB-W Top	4Cx5A	12-23 VDC / 5Ax4C	178x46x18mm
5.	82995	☐	RF Mono Button Panel Top	-	24 VDC	86x86x41mm
6.	83475	■	RF RGB-W Button Panel Top Black	-	24 VDC	86x86x41mm
7.	83419	☐	RF RGB-W Button Panel Top White	-	24 VDC	86x86x41mm

RF

CE RoHS

3 YEARS WARRANTY | IP 20


1.


2.


3.


4.


5.


6.


7.

Control Push / Triac

	Code		Version	Power Max	V IN	Size
1.	85890	■	RF Dimming	-	3 VDC (CR2032)	139x36x11mm
2.	85894	■	RF Dimming 4 Zones	-	3 VDC (CR2032)	138x50x22mm
3.	84431	□	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
4.	84432	■	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
5.	85144	■	RF Dimming 4 Zone 2 Scenes	-	3VDC (CR2032)	86x86x9,5mm
6.	85876	□	Controller Wifi RF Push Triac Tuya	1,5A	100-240 VAC	52x52x26mm
7.	85884	□	Controller RF Push Triac	2A	100-240 VAC	110x48x67mm

tuya | PUSH | DALI


1.


2.


3.


4.


5.


6.


7.

Control PMW / RF

	Code		Version	Power Max	VDC IN	Size
1.	85890	■	RF Dimming	-	3VDC (CR2032)	139x36x11mm
2.	85894	■	RF Dimming 4 Zones	-	3VDC (CR2032)	138x50x22mm
3.	84431	□	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
4.	84432	■	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
5.	85144	■	RF Dimming 4 Zone 2 Scenes	-	3VDC (CR2032)	86x86x9,5mm
6.	22799	□	Controller Push/RF Progressive	8A	12-48 VDC	120x43x27mm
7.	22726	□	Control Push - Dim / RF	8A	5-36 VDC	97x33x18mm

RF | PMW

CE RoHS

3 YEARS WARRANTY | IP 20

1. 
2. 
3. 
4. 
5. 

Control SPI/RF

	Code		Version	Power Max	Pixels Max	VDC IN	Size
1.	92353	■	SPI 1 Zone RGB/RGB-W Remote	-	-	3VDC (CR2032)	107x58,5x9mm
2.	92473	□	Controller SPI/RF (RGB/RGB-W)	8A	1.024	5-24 VDC	97x33x18mm
3.	92853	□	Controller SPI/Tuya/RF (RGB/RGB-W)	8A	1.000	5-24 VDC	114x38x20mm
4.	92553	□	SPI Signal Repeater	-	-	5-24 VDC	52x52x126mm
5.	92699	■	Controller SPI/Computer	-	2.048	5-24 VDC	159x89x24mm

tuya | RF | SPI

1. 
2. 
3. 
4. 
5. 
6. 

Control DMX

	Code		Version	Power Max	V IN	Size
1.	96009	□	Controller DMX / Triac 2CH	2Cx1A	100-240 VAC	170x50x23mm
2.	93470	■	RF RGB-W DMX Touch Panel 4 Zone	-	100-240 VAC	86x86x33mm
3.	95153	□	Amplifier DMX 2CH	-	12-48 VDC	175x45x27mm
4.	93579	■	Decoder DMX 512 5CH	5Cx4A	12-48 VDC	175x46x24mm
5.	95479	■	Decoder DMX 512 4CH	4Cx5A	12-48 VDC	175x46x24mm
6.	95179	□	Decoder DMX 512 1CH	15A	12-24 VDC	170x50x23mm

DMX

CE RoHS

3 YEARS WARRANTY | IP 20

1.
2.



3.



4.



Led Driver CC

	Code			Power Max	VDC IN	VDC OUT	I OUT	Size
1.	DR-H-21W	☐	NEW	21W	220-240 VAC	10-42 VDC	100-500mA	131x43x30mm
2.	DR-H-43W	☐	NEW	43W	220-240 VAC	9-40 VDC	300-1.050mA	131x43x30mm
3.	40807	☐	NEW	-	-	-	-	-

Led Driver Dali

	Code			Power Max	VDC IN	VDC OUT	I OUT	Size
3.	40807	☐	NEW	-	-	-	-	-
4.	DR-H42WDA	☐	NEW	42W	220-240 VAC	2,5-42 VDC	150-1.050mA	131x43x30mm



Led Driver CC Dali / Push

Code		Power Max	VDC IN	VDC OUT	I OUT	Size
CCT-10DA	☐	10W	100-277 VAC	3-42 VDC	100-450mA	135x30x20mm
CCT-20DA	☐	20W	100-277 VAC	3-42 VDC	250-700mA	160x43x20mm
CCT-40DA	☐	40W	100-277 VAC	3-65 VDC	300-1.400mA	172x54x20mm
CCT-60DA	☐	60W	100-277 VAC	3-65 VDC	600- 2.100mA	192x62x24mm

Led Driver CC Triac

Code		Power Max	VDC IN	VDC OUT	I OUT	Size
CCT-10TR	☐	10W	220-240 VAC	3-42 VDC	100-450mA	135x30x20mm
CCT-20TR	☐	20W	220-240 VAC	3-42 VDC	250-700mA	160x43x20mm
CCT-40TR	☐	40W	220-240 VAC	3-65 VDC	300-1.400mA	172x54x20mm
CCT-60TR	☐	60W	220-240 VAC	3-65 VDC	600- 2.100mA	192x62x24mm

DALI 2 | ☐ | TRIAC DIMM

CE RoHS

3 YEARS WARRANTY | IP 20

Power Supplies 24V

Power Supplies Standard

Code			Power	IP	VAC IN	VDC OUT	Size
62430	☐		30W	IP20	198-264 VAC	24 VDC	162x42x30mm
62460	☐		60W	IP20	198-264 VAC	24 VDC	187x45x30mm
62475	☐		75W	IP20	198-264 VAC	24 VDC	187x45x30,5mm
62412	☐		120W	IP20	198-264 VAC	24 VDC	268x45x30,5mm
62415	☐		150W	IP20	198-264 VAC	24 VDC	268x45x30,5mm
62425	☐	NEW	250W	IP20	180-264 VAC	24 VDC	195x67,1x31,2mm
62432	☐	NEW	320W	IP20	198-264 VAC	24 VDC	215x77,5x35mm



Power Supplies Basic

Code		Power	IP	VAC IN	VDC OUT	Size
22420	☐	24W	IP67	176-264 VAC	24 VDC	110x40x30mm
22435	☐	40W	IP67	176-264 VAC	24 VDC	148x40x30mm
22460	☐	60W	IP67	176-264 VAC	24 VDC	162,5x42,5x32mm
22410	☐	100W	IP67	176-264 VAC	24 VDC	190x52x33mm



Power Supplies Top

Code		Power	IP	VAC IN	VDC OUT	Size
22415	☐	150W	IP67	90-264 VAC	24 VDC	191x63x37,5mm
22424	▩	240W	IP67	90-305 VAC	24 VDC	244,2x68x38,8mm
22430	▩	300W	IP67	90-305 VAC	24 VDC	246x77x39,5mm
22432	▩	320W	IP67	90-305 VAC	24 VDC	252x90x43,8mm



Power Supplies Slim

Code		Power	IP	VAC IN	VDC OUT	Size
TR3024	☐	30W	IP20	220-240V VAC	24 VDC	300x30x16mm
TR6024	☐	60W	IP20	220-240V VAC	24 VDC	300x30x16mm
TR10024	☐	100W	IP20	220-240V VAC	24 VDC	350X30X18mm
TR16024	☐	150W	IP20	220-240V VAC	24 VDC	350X30X18mm



CE RoHS

PF >0,9 | 3 YEARS WARRANTY

Power Supplies Triac

Code		Power	IP	VAC IN	VDC OUT	Size
24609	☐	60W	IP20	200-240 VAC	24 VDC	178x61x24mm
24109	■	100W	IP66	200-240 VAC	24 VDC	230x70x43mm
24159	■	150W	IP66	200-240 VAC	24 VDC	256x78x47mm
24309	■	300W	IP66	200-240 VAC	24 VDC	276x78x47mm
TR10024TR	☐	100W	IP20	200-240 VAC	24 VDC	330x30x22mm
TR15024TR	☐	150W	IP20	200-240 VAC	24 VDC	330x30x22mm

TRIAC DIMM



Power Supplies Dali-2 / Push

Code		Power	IP	VAC IN	VDC OUT	Size
64458	☐	45W	IP20	176-264 VAC	24 VDC	187x45x30,5mm
64808	☐	80W	IP20	176-264 VAC	24 VDC	290x45x30,5mm
64158	☐	150W	IP20	176-264 VAC	24 VDC	290x45x30,5mm
TR3024DA	☐	12-30W	IP20	200-240 VAC	24 VDC	300x30x16mm
TR6024DA	☐	60W	IP20	200-240 VAC	24 VDC	350x30x18mm
TR10024DA	☐	30-100W	IP20	200-240 VAC	24 VDC	350x30x18mm
TR15024DA	☐	45-150W	IP20	200-240 VAC	24 VDC	350x30x18mm



Power Supplies Push / Dali-2

Code			Power	IP	VAC IN	VDC OUT	Size
24758	■		90W	IP67	100-305 VAC	24 VDC	180x63x35,5mm
24108	■		120W	IP67	100-305 VAC	24 VDC	199x63x35,5mm
24208	■		200W	IP67	100-305 VAC	24 VDC	219x63x35,5mm
24248	■	NEW	240W	IP67	108-305 VAC	24 VDC	175x68x38,5mm
24308	■		300W	IP66	110-277 VAC	24 VDC	301x78x25,1mm
24408	■	NEW	400W	IP67	90-305 VAC	24 VDC	251x90x41,5mm
24508	■	NEW	500W	IP67	176-305 VAC	24 VDC	251x90x41,5mm

*24758/ 24108 Only Dali

>220W | <220W



Power Supplies Dali-2 DT-8 / Push Dim - CCT

Code		Power	IP	VAC IN	VDC OUT	Size
64453	☐	45W	IP20	176-264 VAC	24 VDC	187x45x30,5mm
64803	☐	80W	IP20	176-264 VAC	24 VDC	290x45x30,5mm
64153	☐	150W	IP20	176-264 VAC	24 VDC	290x45x30,5mm



CE RoHS

PF >0,9 | 3 YEARS WARRANTY


▶ VIDEO

1. 

2. 

3. 

4. 

5. 

Motion Sensor

	Code		Version	Power Max	V IN	Size
1.	85993	■	Mini Sensor Mono PWM	6A	12-24 VDC	55x10mm
2.	85263	■	Mini Sensor CCT PWM	2Cx4A	12-24 VDC	55x10mm
3.	85183	■	Motion Sensor Pir	8A	12-24 VDC	55x10mm
4.	85332	○	Motion Sensor Surface Pir	4A	12-24 VDC	45x62mm
5.	85999	○	Microwave induction dimmer & switch	4A	100-240 VAC	95x40mm

1. 

2. 

3. 4. 

5. 

6. 

7. 

8. 9. 

10. 

Motion Sensor

	Code		Version	Power Max	VDC IN	Size
1.	85220	□	Sensor Pir Double Surface hand/door	4A	12-24 VDC	12x12mm
2.	85290	■	Sensor Pir Double Surface hand/door	4A	12-24 VDC	12x12mm
3.	85120	□	Sensor Simple Surface door	4A	12-24 VDC	12x12mm
4.	85420	□	Sensor Simple Surface hand	4A	12-24 VDC	12x12mm
5.	85190	■	Sensor Simple Surface door	4A	12-24 VDC	12x12mm
6.	85626	○	Sensor Pir Double Recessed hand/door	4A	12-24 VDC	14x18mm
7.	85696	●	Sensor Pir Double Recessed hand/door	4A	12-24 VDC	14x18mm
8.	85336	○	Sensor Simple Recessed door	4A	12-24 VDC	14x18mm
9.	85330	○	Sensor Simple Recessed hand	4A	12-24 VDC	14x18mm
10.	85396	●	Sensor Simple Recessed door	4A	12-24 VDC	14x18mm

CE RoHS

3 YEARS WARRANTY | IP 20



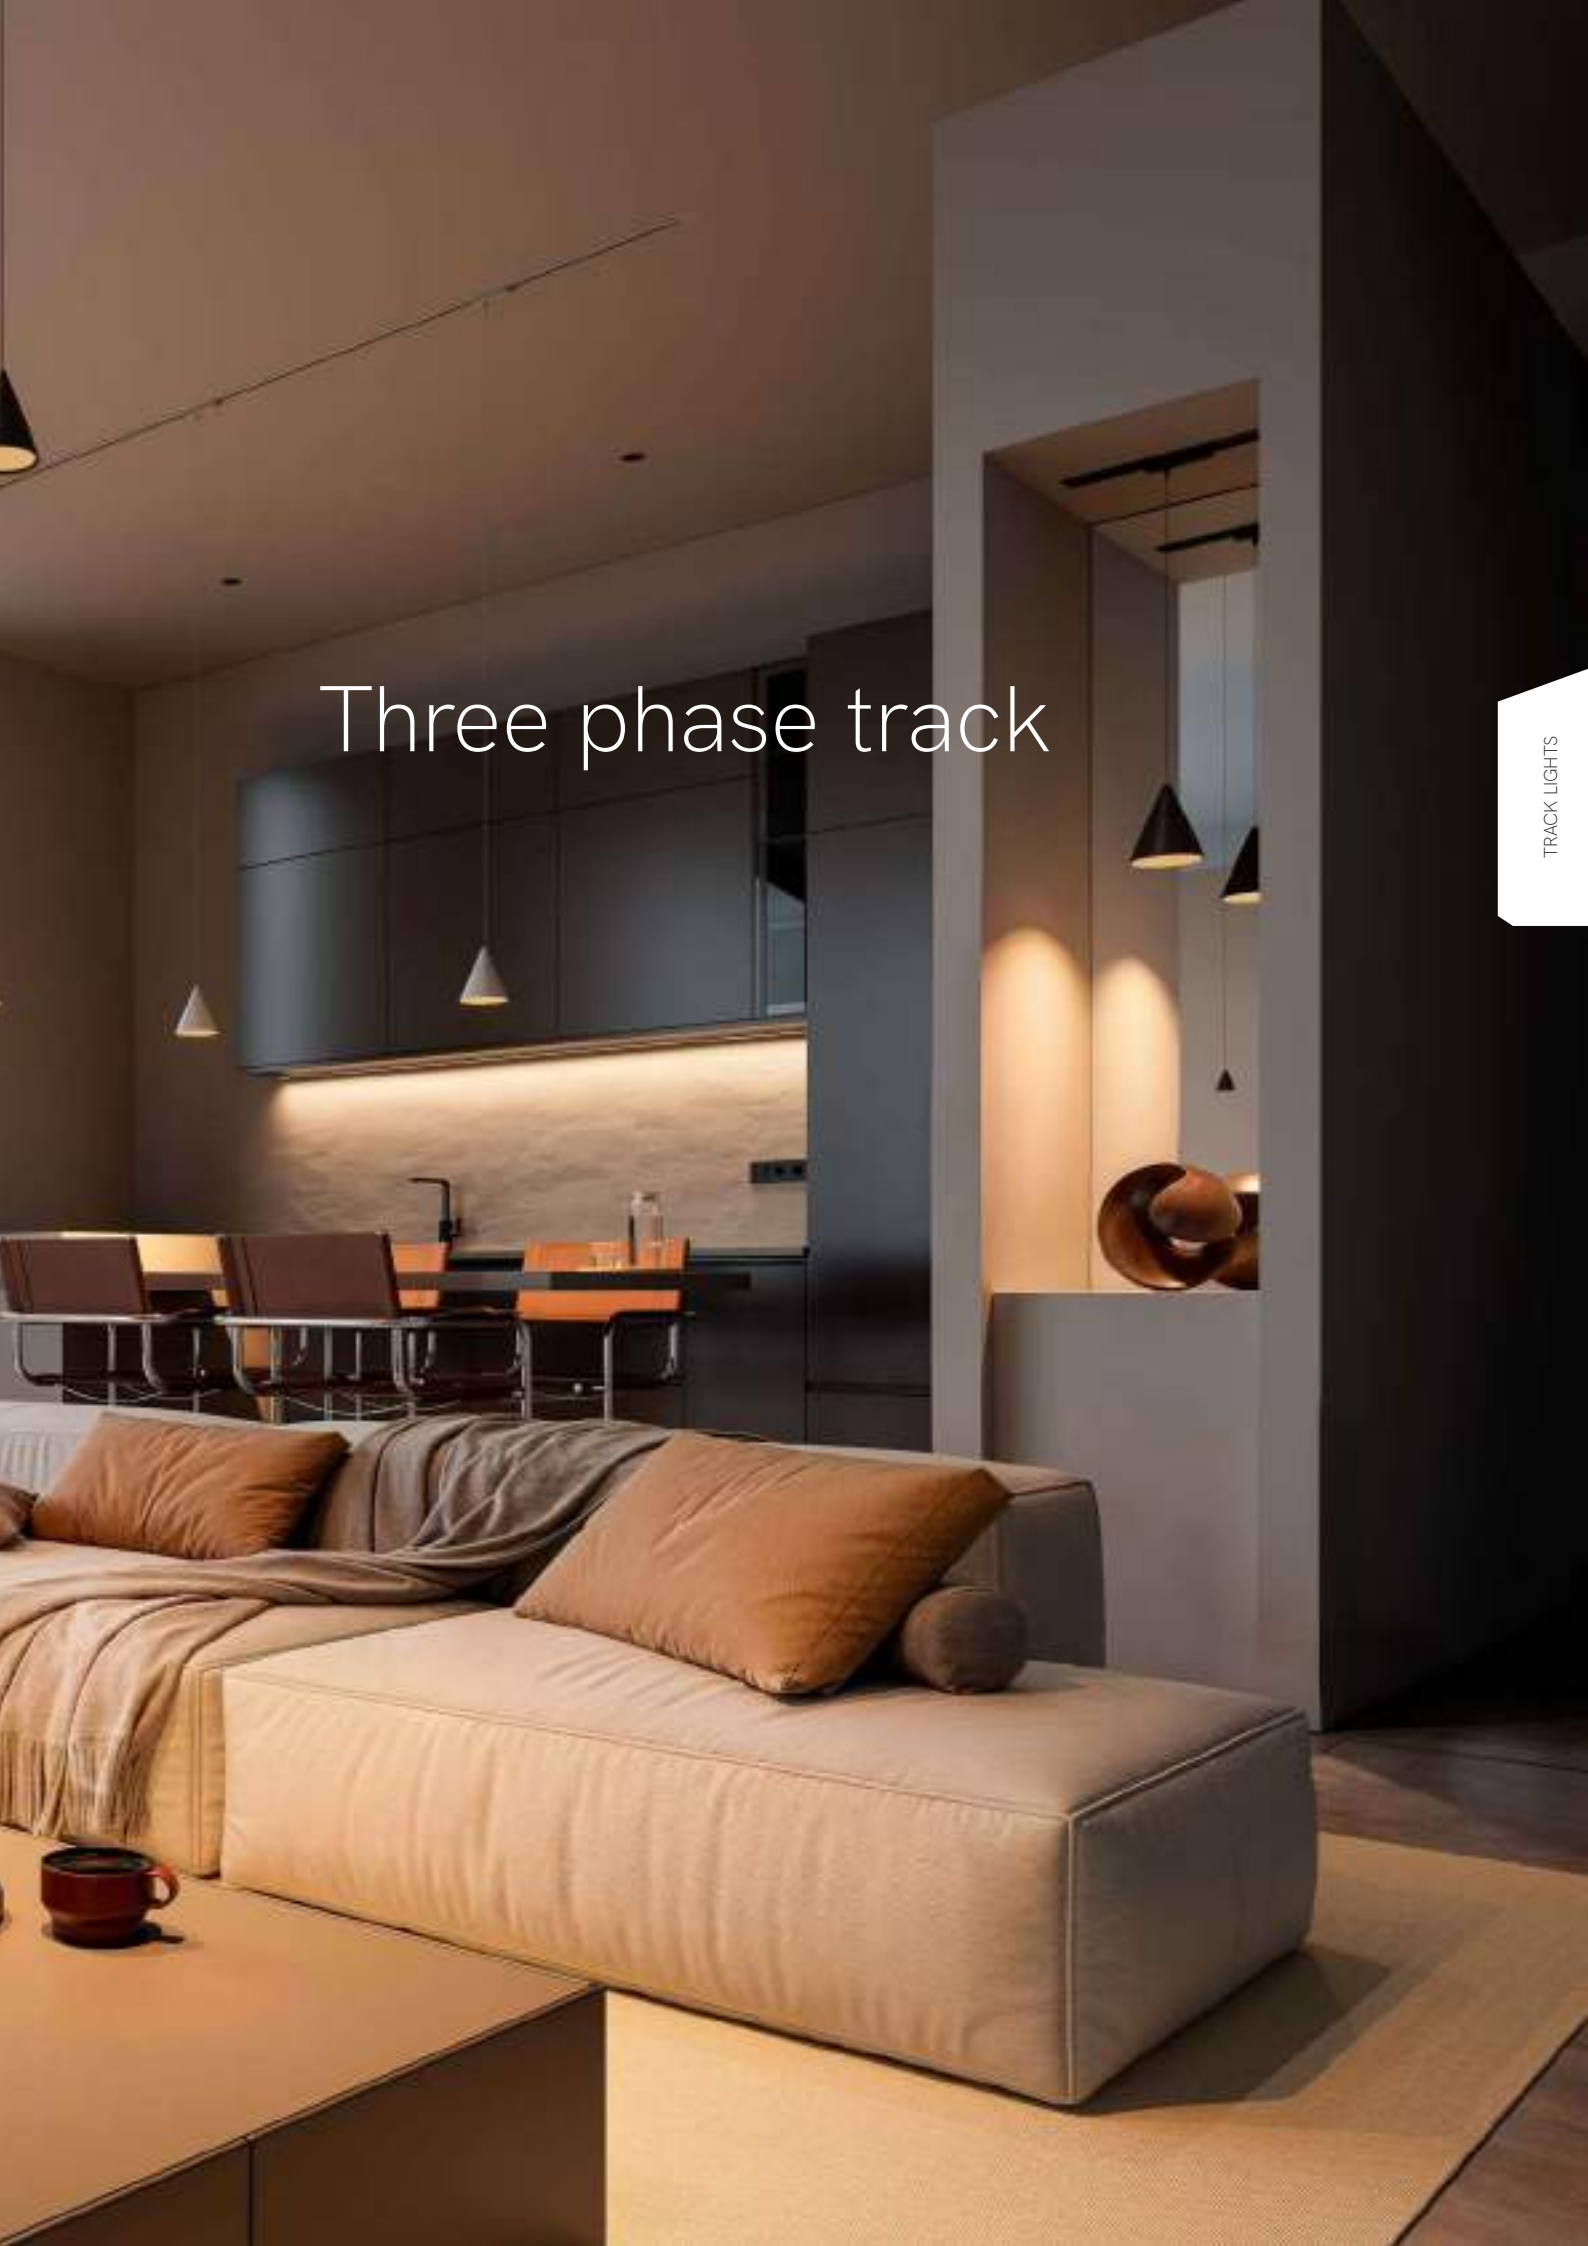

Three phase track

Three phase track surface accessories

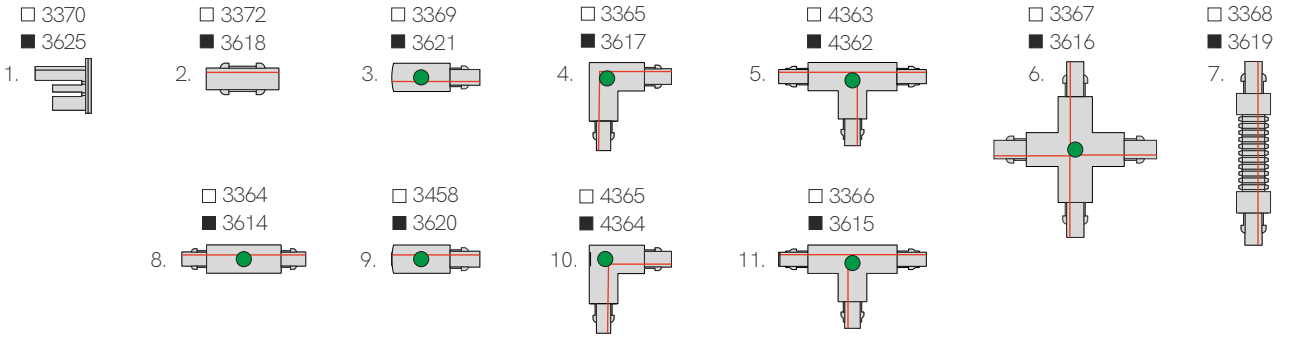

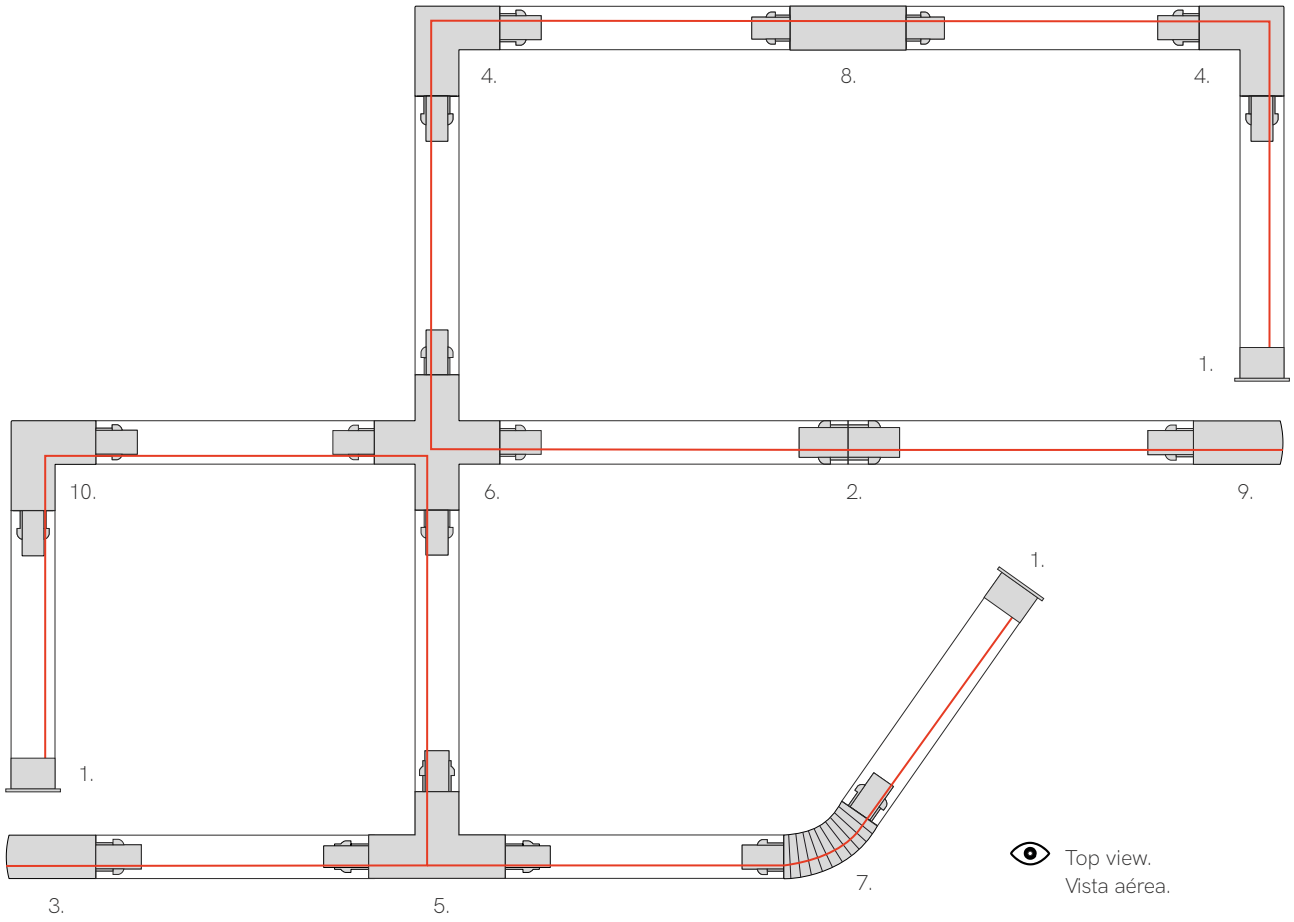

● Allows power input

CE RoHS

3 YEARS WARRANTY | IP 20



*End cap and right power connector included

Three phase track surface
W: 32mm H: 31mm

☐	1m	3795
☐	2m	3796
☐	3m	3797
■	1m	D-3626
■	2m	D-3627
■	3m	D-3628



Ceiling fixing 3PH surface
L: 30mm W: 25mm H: 12mm

☐	3373
■	3623



Power connector 3PH surface
L: 98mm W: 32mm H: 32mm

☐	Left	3369
☐	Right	3458
■	Left	3621
■	Right	3620



Linear joint 3PH without spacing
L: 68mm W: 25mm H: 27mm

☐	3372
■	3618



Linear joint 3PH with spacing surface
L: 166mm W: 35mm H: 32mm

☐	3364
■	3614



L joint 90° 3PH surface
L: 100mm W: 66mm H: 32mm

☐	Left	4365
☐	Right	3365
■	Left	4364
■	Right	3617



T joint 3PH surface
L: 166mm W: 100mm H: 32mm

☐	Left	4363
☐	Right	3366
■	Left	4362
■	Right	3615



X joint 3PH surface
L: 166mm W: 166mm H: 32mm

☐	3367
■	3616



Flexible joint 3PH
L: 245mm W: 35mm H: 32mm

☐	3368
■	3619



End cap 3PH
L: 32mm W: 32mm H: 32mm

☐	3370
■	3625



Adapter 3PH
L: 70mm W: 40mm H: 41mm

☐	3371-V2
■	3624-V2



Suspension kit 3PH
L: 3.000mm W: Ø35 | Ø2.4 H: 47mm

☐	3459
■	3622



Surface base 3PH
L: Ø100mm H: 32mm

○	4700
●	4701

Surface Common Base

Three phase track recessed accessories

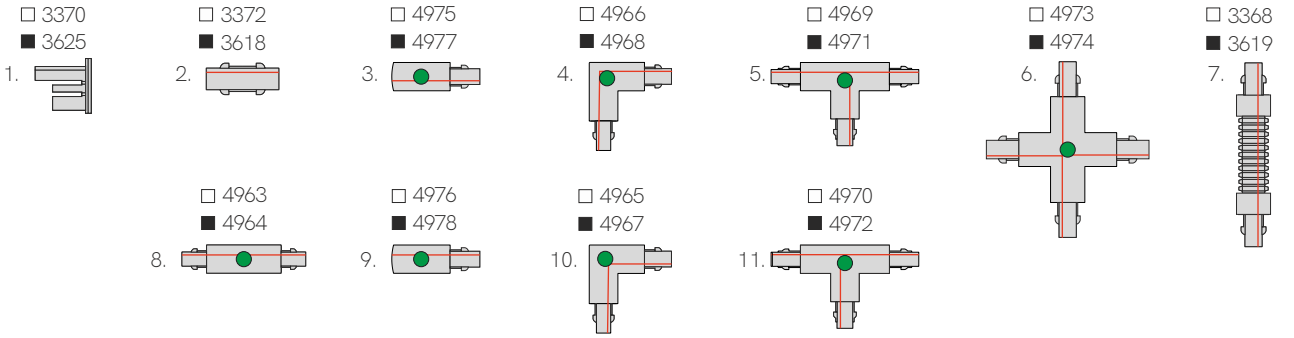

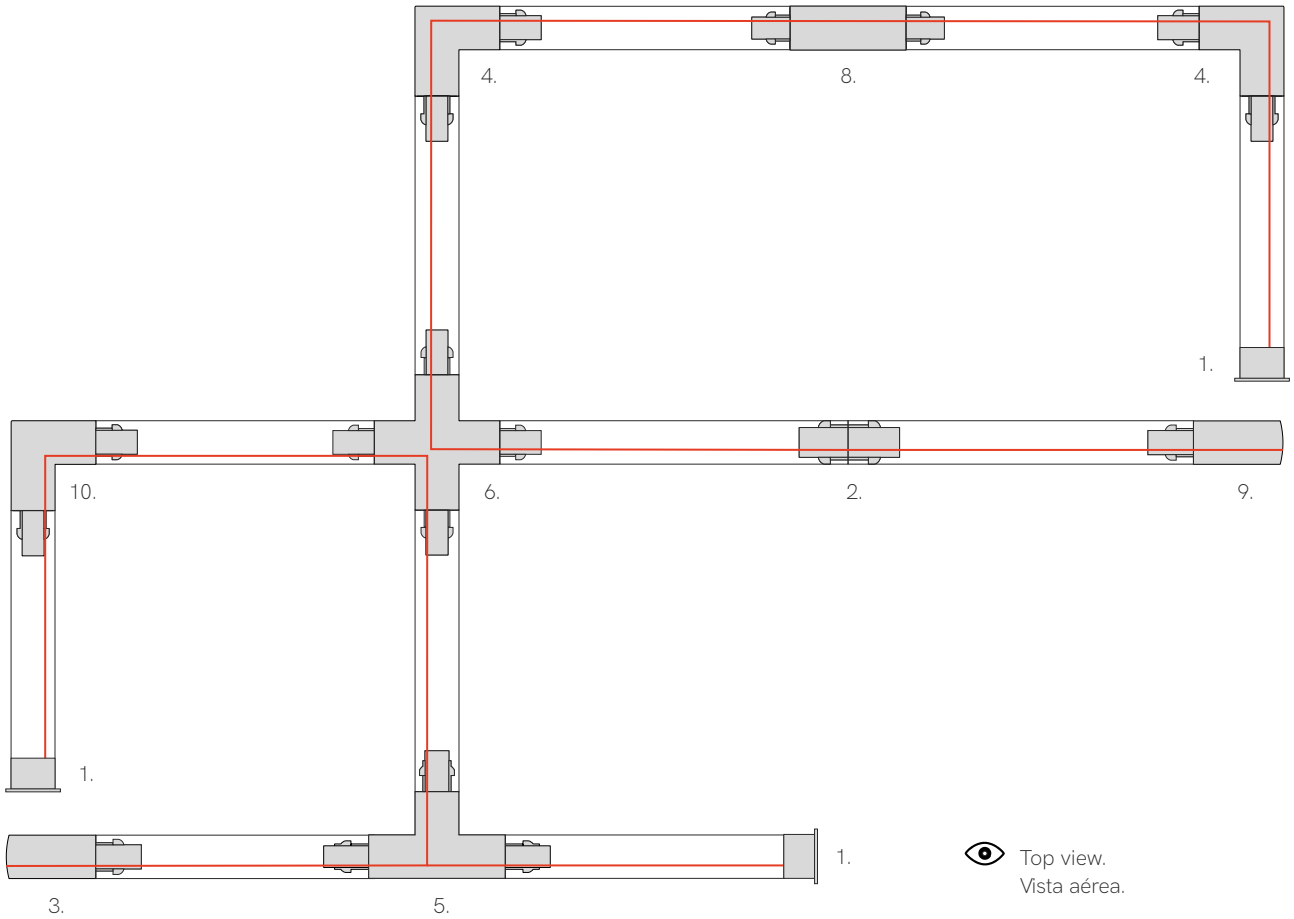

● Allows power input

CE RoHS

3 YEARS WARRANTY | IP 20



*End cap and right power connector included

Three phase track recessed
W: 56mm H: 33mm

☐	2m	3897
☐	3m	3898
■	2m	4753
■	3m	4754



Ceiling fixing 3PH recessed
L: 64mm W: 25mm H: 32mm

▩	3805	



Power connector 3PH recessed
L: 98mm W: 56,5mm H: 33,7mm

☐	Left	4975
☐	Right	4976
■	Left	4977
■	Right	4978



Linear joint 3PH without spacing
L: 68mm W: 25mm H: 27mm

☐	3372	
■	3618	



Linear joint 3PH with spacing recessed
L: 166mm W: 56,5mm H: 33,7mm

☐	4963	
■	4964	



Flexible joint 3PH
L: 245mm W: 35mm H: 32mm

☐	3368	
■	3619	



L joint 3PH recessed
L: 111mm W: 111mm H: 33,7mm

☐	Left	4965
☐	Right	4966
■	Left	4967
■	Right	4968



T joint 3PH recessed
L: 166mm W: 111mm H: 33,7mm

☐	Left	4969
☐	Right	4970
■	Left	4971
■	Right	4972



X joint 3PH recessed
L: 166mm W: 166mm H: 33,7mm

☐	4973	
■	4974	



End cap 3PH
L: 32mm W: 32mm H: 32mm

☐	3370	
■	3625	



Adapter 3PH
L: 70mm W: 40mm H: 41mm

☐	3371-V2	
■	3624-V2	



Recessed base 3PH
L: Ø130mm H: 60mm Ø110mm

○	3851	
●	3852	

*Need Three Phase Surface Base (4700 or 4701) to put inside.

Recessed Common Base

New

Nano Alp 3PH suspension





Alp 3PH suspension





Technical Information

	Nano Alp 3PH suspension	Alp 3PH suspension
Power	5W	5W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	370 lm	370 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
○	190S11 ON/OFF	191S11 ON/OFF
●	190S12 ON/OFF	191S12 ON/OFF
○	190S41 TRIAC	191S41 TRIAC
●	190S42 TRIAC	191S42 TRIAC

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 45° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/60

New

Ark 3PH suspension



Black-gray



Black-transp.



White-transp.



Technical Information

Power	6W
Installation	Three Phase Track
Color Temperature	2.700K / 3.000K
Lumens	350 lm / 360 lm
Material	Aluminium and acrylic
Finishes	White-transparent / Black-transparent / Black-gray

Code								
198211	ON/ OFF	White-transp.	2.700K	199241	TRIAC	White-transp.	2.700K
198311	ON/ OFF	White-transp.	3.000K	199341	TRIAC	White-transp.	3.000K
198212	ON/ OFF	Black-transp.	2.700K	199242	TRIAC	Black-transp.	2.700K
198312	ON/ OFF	Black-transp.	3.000K	199342	TRIAC	Black-transp.	3.000K
198219	ON/ OFF	Black-gray	2.700K	199249	TRIAC	Black-gray	2.700K
198319	ON/ OFF	Black-gray	3.000K	199349	TRIAC	Black-gray	3.000K

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 90° | 50/60 Hz | +40°C -20°C | 1/12

New

Atmos 3PH suspension





Atmos XL 3PH suspension





Technical Information

	Atmos 3PH suspension	Atmos XL 3PH suspension
Power	7W	10W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	770 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code					
	○	313S11	ON/OFF	○ 314S11	ON/OFF
	●	313S12	ON/OFF	● 314S12	ON/OFF
	○	313S41	TRIAC	○ 314S41	TRIAC
	●	313S42	TRIAC	● 314S42	TRIAC
		1/8		1/4	

ⓘ Consult delivery terms and conditions.

Accessories

Included with:
313S11 / 313S41 / 314S11 / 314S41



Included with:
313S12 / 313S42 / 314S12 / 314S42

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH

beneito-faure.com

New

Atmos GU10 3PH suspension





Atmos GU10 XL 3PH suspension





Technical Information

Installation	Three Phase Track	Three Phase Track
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)

Code		
	○ 315011	○ 316011
	● 315012	● 316012
	1/8	1/4

CE RoHS

Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 220/240 VAC |

New

Bora 3PH suspension





Bora XL 3PH suspension





Technical Information

	Bora 3PH suspension	Bora XL 3PH suspension
Power	8W	15W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	○ 192S11 ON/OFF	○ 193S11 ON/OFF
	● 192S12 ON /OFF	● 193S12 ON /OFF
	○ 192S41 TRIAC	○ 193S41 TRIAC
	● 192S42 TRIAC	● 193S42 TRIAC
	1/30	1/20

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH

New

Lievo 3PH suspension





Lievo XL 3PH suspension





Technical Information

	Lievo 3PH suspension	Lievo XL 3PH suspension
Power	8W	15W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
V / I in	20-55VDC/150mA	20-42VDC/350mA

Code		
○	194S11 ON/OFF	195S11 ON/OFF
●	194S12 ON /OFF	195S12 ON /OFF
○	194S41 TRIAC	195S41 TRIAC
●	192S42 TRIAC	195S42 TRIAC
	1/30	1/12

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH


▶ VIDEO

New

Zoe 3PH suspension





Zoe XL 3PH suspension





Technical Information

Power	8W	15W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
△	196S11 ON/OFF	197S11 ON/OFF
▲	196S12 ON /OFF	197S12 ON /OFF
△	196S41 TRIAC	197S41 TRIAC
▲	196S42 TRIAC	197S42 TRIAC
	1/30	1/12

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH

New

Mini Hat 3PH suspension





Hat 3PH suspension





Technical Information

	Mini Hat 3PH suspension	Hat 3PH suspension
Power	8W	8W
Installation	Three Phase Track	Three Phase Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	800lm	835 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
○	2.700K ON/OFF 311211	○ 2.700K ON/OFF 312211
○	3.000K ON/OFF 311311	○ 3.000K ON/OFF 312311
●	2.700K ON/OFF 311212	● 2.700K ON/OFF 312212
●	3.000K ON/OFF 311312	● 3.000K ON/OFF 312312
○	2.700K TRIAC 311241	○ 2.700K TRIAC 312241
○	3.000K TRIAC 311341	○ 3.000K TRIAC 312341
●	2.700K TRIAC 311242	● 2.700K TRIAC 312242
●	3.000K TRIAC 311342	● 3.000K TRIAC 312342
	70° | 1/10	83° | 1/5

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥90 | 50/60 Hz | +40°C -20°C

New

Cookie 3PH suspension





Technical Information

Power	12W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black

Code		
	○	310S11 ON/OFF
	●	310S12 ON /OFF
	○	310S41 TRIAC
	●	310S42 TRIAC

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 2220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 38° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/20

New

Sphere 3PH suspension





Technical Information

Power	8W
Installation	Three Phase Track
Color Temperature	2.700K / 3.000K
Lumens	255 lm
Material	Aluminium and glass
Finishes	White / Black

Code			
	○	2.700K ON/OFF	317211
	○	3.000K ON/OFF	317311
	●	2.700K ON/OFF	317212
	●	3.000K ON/OFF	317312
	○	2.700K TRIAC	317241
	○	3.000K TRIAC	317341
	●	2.700K TRIAC	317242
	●	3.000K TRIAC	317342

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | CRI ≥90 | 360° | +40°C -20°C | 1/12

Picolo 3PH





Technical Information

Power	9,5W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.300 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 4437-N
	● 4438-N
ⓘ	Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/20



Picolo GU10 3PH





Picolo AR111 3PH





GU10 AR111

Technical Information

	Picolo GU10 3PH	Picolo AR111 3PH
Installation	Three Phase Track	Three Phase Track
Material	Aluminium	Aluminium
Finishes	White / Black	White
Bulbholder	50mm GU10 (except Power bulb)	111mm GU10

Code		
	○ 3990-V3	○ 4435
	● 3989-V3	ⓘ Custom RAL
	ⓘ Custom RAL	
	3 YEARS WARRANTY | 1/20	5 YEARS WARRANTY | 1/40

ⓘ Consult delivery terms and conditions.

Accessories



Recessed base (not included)
○ 4835 ● 4836

CE RoHS

*GU10 bulbholder included.

IP 20 | 220/240 VAC |



Cookie 3PH





Technical Information

Power	12W
Installation	Threee Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 5179
	● 5180

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 38° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/20



▶ VIDEO

New

Oculum 3PH





Technical Information

Power	15W / 25W
Lumens	1.628 lm - 2.625 lm
Installation	Three Phase Track
Material	Aluminium
Finishes	White (9003) / Black (9005)

Code		Diffuser (Angle)		Power		CCT (Lm)		Driver		Colour	
Code	7	Narrow (15°)	N	15W	8	2.700K (95 lm/W)	2	On/Off	1	White	1
		Spot (22°)	S	25W	9	3.000K (100 lm/W)	3	Triac	4	Black	2
		Medium (36°)	M			4.000K (105 lm/W)	4				
		Eliptic (30°-60°)	E								

Code: 7 6

*Create your code acording to your preferences.

Consult delivery terms and conditions.

Accessories



Honeycomb Snoot anti-glare
● 20811



Oval diffuser
● 20833



Snoot
● 20855



Wallwasher
● 20877

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥90 | 15° 22° 36° 30°-60° | 50/60 Hz | TRIAC DIMM | +40°C -15°C | 1


▶ VIDEO

Zoom 3PH



Power and CTT switch





Technical Information

Power	Switch 15W / 20W / 25W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	15W: 1.200 lm / 20W: 1.500lm / 25W: 1.800 lm
Material	Aluminium and polycarbonate
Finishes	White / Black

Code		
	○	4900
	●	4901

CE RoHS

Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 15° - 55° | 50/60 Hz | IK06 | +45°C -20°C | CCT SWITCH | POWER SWITCH | 1/10



Óptica Rapp , La Laguna. Tenerife (Spain). Design: Grupo Globarq. Photography: Kuo estudio.

Aston 3PH





Konic 3PH





Aston

Konic

Technical Information

	Aston 3PH	Konic 3PH
Power	20W	30W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	2.400 lm	2.440 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	○ 4439-N	○ 4985-N
	● 4440-N	● 4986-N
	ⓘ Custom RAL	ⓘ Custom RAL
	CRI ≥90	CRI ≥94 | TRIAC DIMM

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | 15° 38° 60° | 50/60 Hz | +40°C -15°C | CCT SWITCH | 1/8



Lonja 3PH





Technical Information

Power	22W
Lumens	1.628 lm - 2.662 lm
Installation	Three Phase Track
Material	Aluminium
Finishes	White (9003) / Black (9005)

Code	
Code	3

Diffuser (Angle)	
Transparent (15°)	1
Transparent (24°)	6
Transparent (36°)	8

Size	
	9

CCT (Lm)	
FISH - 5.500K (121 lm/w)	1
3.000K (95 lm/w)	3
4.000K (100 lm/w)	4
MEAT R - 1.950K (75 lm/w)	5
FRUIT - 2.700K (105 lm/w)	6
WINE/CHEESE - 2.700K (112 lm/w)	7
BREAD - 2.400K (112 lm/w)	8
MEAT M - 3.500K (74 lm/w)	9

Driver	
On/Off	1
Triac	4

Colour	
White	1
Black	2
Custom RAL	

Code: 3 9

*Create your code acording to your preferences.

ⓘ Consult delivery terms and conditions.

Accessories



Honeycomb anti-glare

● 40111

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥90 | 3.000K 4.000K | 15° 24° 36° | 50/60 Hz | TRIAC DIMM | +40°C -15°C | 1



▶ VIDEO

New

Lonja XL 3PH





Technical Information

Power	35W / 45W (Triac)
Lumens	2.450 lm - 5.265 lm
Installation	Three Phase Track
Material	Aluminium
Finishes	White (9003) / Black (9005)

Code		Diffuser (Angle)		Size	CCT (Lm)		Driver		Colour	
Code	3	Narrow (15°)	N	7	FISH - 5.500K (117 lm/w)	1	On/Off (45W)	1	White	1
		Spot (24°)	S		2.700K (95 lm/w)	2	Triac (only 35W)	4	Black	2
		Medium (40°)	M		3.000K (100 lm/w)	3			ⓘ Custom RAL	
		Wide (60°)	W		4.000K (105 lm/w)	4				
					ⓘ MEAT R - 1.950K (70 lm/w)	5				
					ⓘ FRUIT - 2.700K (100 lm/w)	6				
					ⓘ BREAD - 2.400K (107 lm/w)	8				

Code: 3 7

CE RoHS EMC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥90 | 2.700K 3.000K 4.000K | 15° 24° 40° 60° | 50/60 Hz | TRIAC DIMM | +40°C -15°C | 1



Lena 3PH



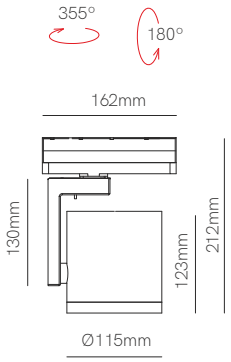

Technical Information

Power	35W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	4.200 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 4449-V3
	● 4450-V3
ⓘ	Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥90 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/8



Crown 3PH





Technical Information

Power	25W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.300 lm
Material	Aluminium and polycarbonate
Finishes	White / Black

Code	
	○ 5221
	● 5222

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 24° - 60° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20



Kom 3PH 20W





Kom 3PH 30W





Kom 3PH 40W





Technical Information

	Kom 3PH 20W	Kom 3PH 30W	Kom 3PH 40W
Power	20W	30W	40W
Installation	Three Phase Track	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	3.000K / 4.000K
Lumens	2.300 lm	2.470 lm	4.500 lm / 4.600 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code			
	☐ 4337-N	☐ 4336-N	☐ 3.000K 4444
	■ 4339-N	■ 4338-N	☐ 4.000K 4445
	ⓘ Custom RAL	ⓘ Custom RAL	■ 3.000K 4447
			■ 4.000K 4448
			ⓘ Custom RAL
	CRI ≥90 | CCT SWITCH	CRI ≥94 | CCT SWITCH	CRI ≥80

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | 15° 24° 40° | 50/60 Hz | +50°C -20°C | 1/10



Alfa 3PH





Technical Information

Power	32W
Installation	Three Phase Track
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	3.100 lm / 3.200 lm / 3.250 lm
Material	Aluminium
Finishes	White / Black

Code			
	☐	2.700K	4038
	☐	3.000K	4039
	☐	4.000K	4040
	■	2.700K	4176
	■	3.000K	4177
	■	4.000K	4178

CE RoHS

5 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C -10°C | AKZO NOBEL | 1/10



Mini Tram 3PH







Tram 3PH







Technical Information

	Mini Tram 3PH	Tram 3PH
Power	20W	30W
Installation	Three Phase Track	Three Phase Track
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	2.320 lm / 2.400 lm	3.520 lm / 3.600 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	☐	3.000K	4427	☐	3.000K	4541
	☐	4.000K	4428	☐	4.000K	4542
	■	3.000K	4429	■	3.000K	4543
	■	4.000K	4430	■	4.000K	4544
		5 YEARS WARRANTY			3 YEARS WARRANTY	

CE RoHS

30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +45°C -20°C | 1/10



ÚNICO ICÓNICO &CO Gallery, Barcelona (Spain). Photography: Pepo Úbeda.

Sono 3PH







Sono XL 3PH







*Need Tuya Smart App to work.

Technical Information

	Sono 3PH	Sono XL 3PH
Power	40W	60W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Tuya 2.600K - 4.000K	Tuya 2.600K - 4.000K
Lumens	3.130 lm	4.390 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black	White / Black

Code		
	☐ 4946	☐ 4950
	■ 4947	■ 4951
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Gateway Wifi
☐ 4956

CE RoHS

*See page 324 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥98 | 30° | 50/60 Hz | IK06 | +45°C -15°C | tuya | 1/4



▶ VIDEO

Magnet track mini





Magnet track 48V mini

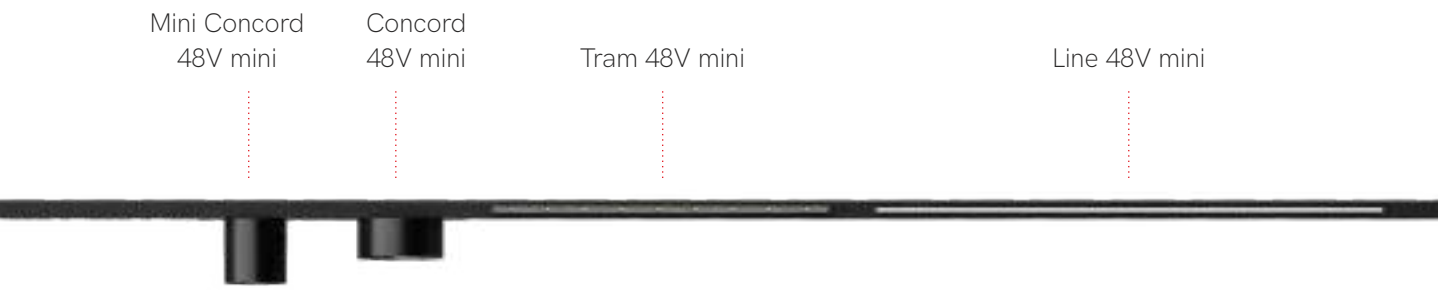

Beneito Faure introduces the mini magnetic track, developed to offer a punctual and decorative lighting in interior rooms. Its small size design makes it an ideal solution for domestic and decorative environments that need to highlight specific elements without interfering with the design of the space. The new collection includes a wide variety of products that are integrated into the track and switch on by magnetization on contact, guaranteeing a focused light emission at short angles, ideal for projects that require maximum precision.

Beneito Faure presenta el carril magnético mini, desarrollado para ofrecer una iluminación puntual y decorativa en estancias interiores. Su diseño de tamaño reducido lo convierte en una solución idónea para entornos domésticos y decorativos que necesitan resaltar elementos específicos sin interferir en el diseño del espacio.
La nueva colección incluye una amplia variedad de productos que se integran en el carril y se encienden por imantación al contactarlo, garantizando una emisión de luz focalizada con ángulos cortos, ideal para proyectos que exigen máxima precisión.

Magnet track mini accessories

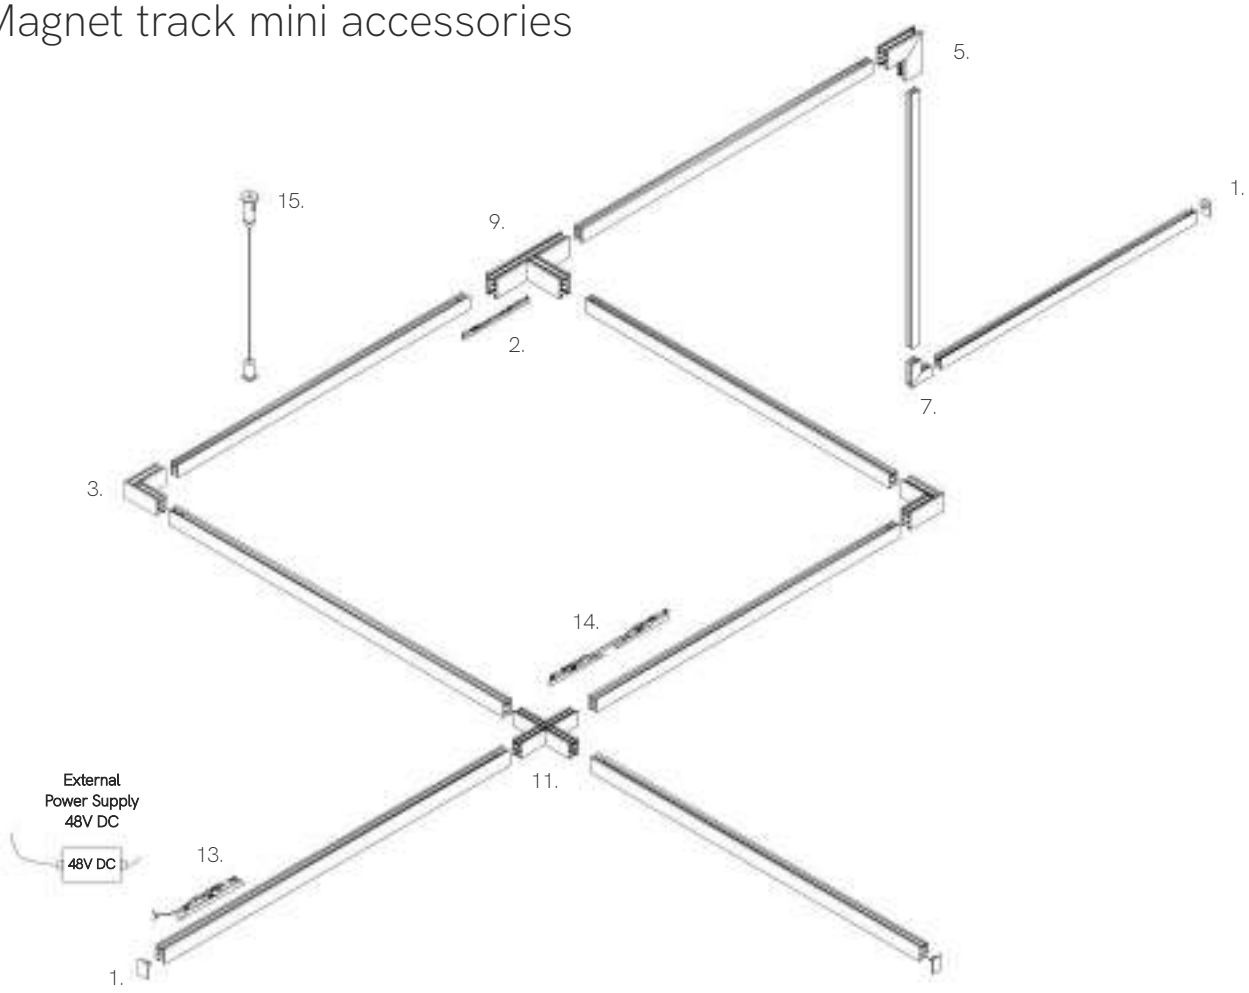

Power Supplies 48V mini

Code		Version	Power Max	IP	VDC OUT	Size
4725	☐	Power Supply	75W	IP20	48 VDC	350x30x18mm
4726	☐	Power Supply	150W	IP20	48 VDC	350x30x18mm
4727	☐	Power Supply	250W	IP20	48 VDC	400x40x22mm

Control Tuya/RF/Push (page 337)

Code			Version	Power Max	VDC IN	Size
22699	☐	NEW	Controller Push/Tuya RF1C	1Cx10/15A	12-48 VDC	175x45x27mm
22571	☐	NEW	Mini controller Tuya/RF/Push 1C	1C/5A	12-48 VDC	58X35,5X18mm

Control RF (page 327)

Code		Version	Power Max	V IN	Size
85890	■	RF Dimming	-	3 VDC (CR2032)	139x36x11mm
85894	■	RF Dimming 4 Zones	-	3 VDC (CR2032)	138x50x22mm
84431	☐	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
84432	■	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
85144	■	RF Dimming 4 Zone 2 Scenes	-	3VDC (CR2032)	86x86x9,5mm

CE RoHS

3 YEARS WARRANTY | IP 20 | III



Magnet track mini surface
W: 19,3mm H: 12mm

☐	2m	5578
☐	3m	5579
■	2m	5580
■	3m	5581



Magnet track mini recessed
W: 35mm x H: 16,7mm

☐	2m	5582
☐	3m	5583
■	2m	5584
■	3m	5585

3.


L joint ceiling surface
L: 42mm W: 42mm H: 19,3mm

☐	5594
■	5595



L joint ceiling recessed
L: 35mm W: 35mm H: 16,7mm

☐	5606
■	5607

5.


L joint wall ceiling outer surface
L: 42mm W: 42mm H: 19,3mm

☐	5596
■	5597



L joint wall ceiling outer recessed
L: 35mm W: 35mm H: 16,7mm

☐	5608
■	5609

7.


L joint wall ceiling inner surface
L: 42mm W: 42mm H: 19,3mm

☐	5598
■	5599



L joint wall ceiling inner recessed
L: 35mm W: 35mm H: 16,7mm

☐	5610
■	5611

9.


T joint ceiling surface
L: 84mm W: 48mm H: 19,3mm

☐	5600
■	5601



T joint ceiling recessed
L: 84mm W: 48mm H: 16,7mm

☐	5612
■	5613

11.


X joint ceiling surface
L: 84mm W: 84mm H: 19,3mm

☐	5602
■	5603



X joint ceiling recessed
L: 84mm W: 84mm H: 16,7mm

☐	5614
■	5615

1.


End cap surface / recessed
L: 12mm W: 5mm H: 19,3mm

☐	5586
■	5587

2.


Linear joint
L: 200mm W: 5mm H: 14mm

☐	5590
■	5591

13.


Start connector
L: 100mm W: 5mm H: 14mm

☐	5588
■	5589

15.

Suspension kit
L: 2.000mm W: 15mm

☐	5604
■	5605

14.


Central corner connector
L: 225mm W: 5mm H: 14mm

☐	5592
■	5593


VIDEO

Mini Picolo 48V mini





Picolo 48V mini





*Need power supply (page 392).

Technical Information

Power	6W	10W
Installation	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	380 lm / 415 lm	440 lm / 475 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5628	○	2.700K	5632
	○	3.000K	5629	○	3.000K	5633
	●	2.700K	5630	●	2.700K	5634
	●	3.000K	5631	●	3.000K	5635
			1/48			1/36

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 36° | +40°C -20°C



Atmos slim 48V mini



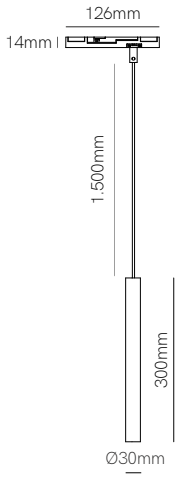

*Need power supply (page 392).

Technical Information

Power	6W
Installation	Magnet track mini
Color Temperature	2.700K / 3.000K
Lumens	380 lm / 415 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	2.700K	5636
	○	3.000K	5637
	●	2.700K	5638
	●	3.000K	5639

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | III | 36° | +40°C -20°C | 1/24



Zoe 48V mini





Zoe 48V mini suspension



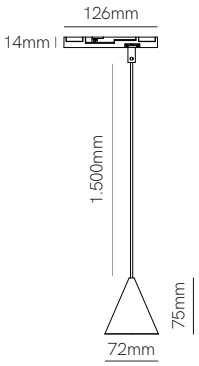

*Need power supply (page 392).

Technical Information

Power	6W	6W
Installation	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	375 lm / 410 lm	375 lm / 410 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5644	○	2.700K	5640
	○	3.000K	5645	○	3.000K	5641
	●	2.700K	5646	●	2.700K	5642
	●	3.000K	5647	●	3.000K	5643

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | III | 36° | +40°C -20°C | 1/36



Sphere 48V mini



Sphere 48V mini suspension



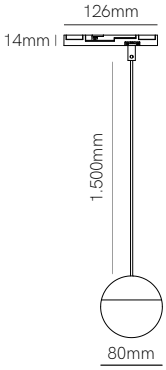

*Need power supply (page 392).

Technical Information

	Sphere 48V mini	Sphere 48V mini suspension
Power	7W	7W
Installation	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	380 lm / 415 lm	380 lm / 415 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5660	○	2.700K	5656
	○	3.000K	5661	○	3.000K	5657
	●	2.700K	5662	●	2.700K	5658
	●	3.000K	5663	●	3.000K	5659

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 100° | +40°C -20°C | 1/36



Mini Concord 48V mini





Concord 48V mini





*Need power supply (page 392).

Technical Information

	Mini Concord 48V mini	Concord 48V mini
Power	8W	10W
Installation	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	290 lm / 315 lm	490 lm / 530 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5652	○	2.700K	5648
	○	3.000K	5653	○	3.000K	5649
	●	2.700K	5654	●	2.700K	5650
	●	3.000K	5655	●	3.000K	5651
			1/36			1/24

Accessories



Honeycomb anti-glare
(Included)

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | III | 36° | +40°C -20°C



Tram 48V mini

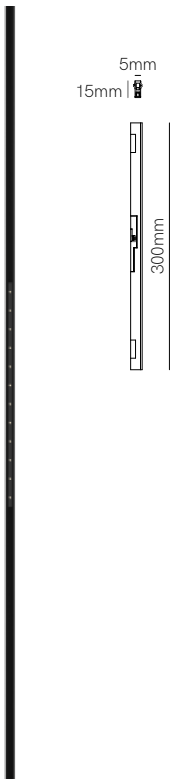

Mini Line 48V mini

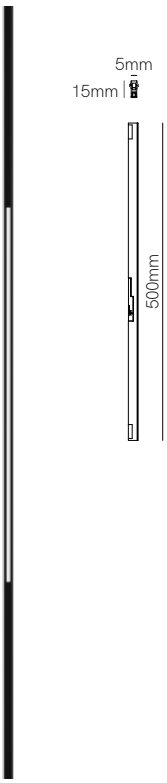

Line 48V mini

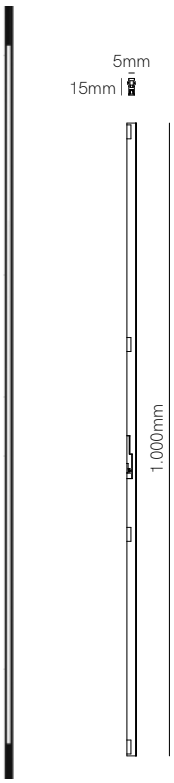

Tram 48V mini

Line 48V mini

*Need power supply (page 392).

Technical Information

	Tram 48V mini	Mini Line 48V mini	Line 48V mini
Power	8W	8W	16W
Installation	Magnet track mini	Magnet track mini	Magnet track mini
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	545 lm / 605 lm	300 lm / 325 lm	600 lm / 650 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code								
	○	2.700K	5624	○	2.700K	5616	○	2.700K	5620
	○	3.000K	5625	○	3.000K	5617	○	3.000K	5621
	●	2.700K	5626	●	2.700K	5618	●	2.700K	5622
	●	3.000K	5627	●	3.000K	5619	●	3.000K	5623
	65°		1/60	100°		1/48	100°		1/36

CE RoHS EMC

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | +40°C -20°C





Magnet track

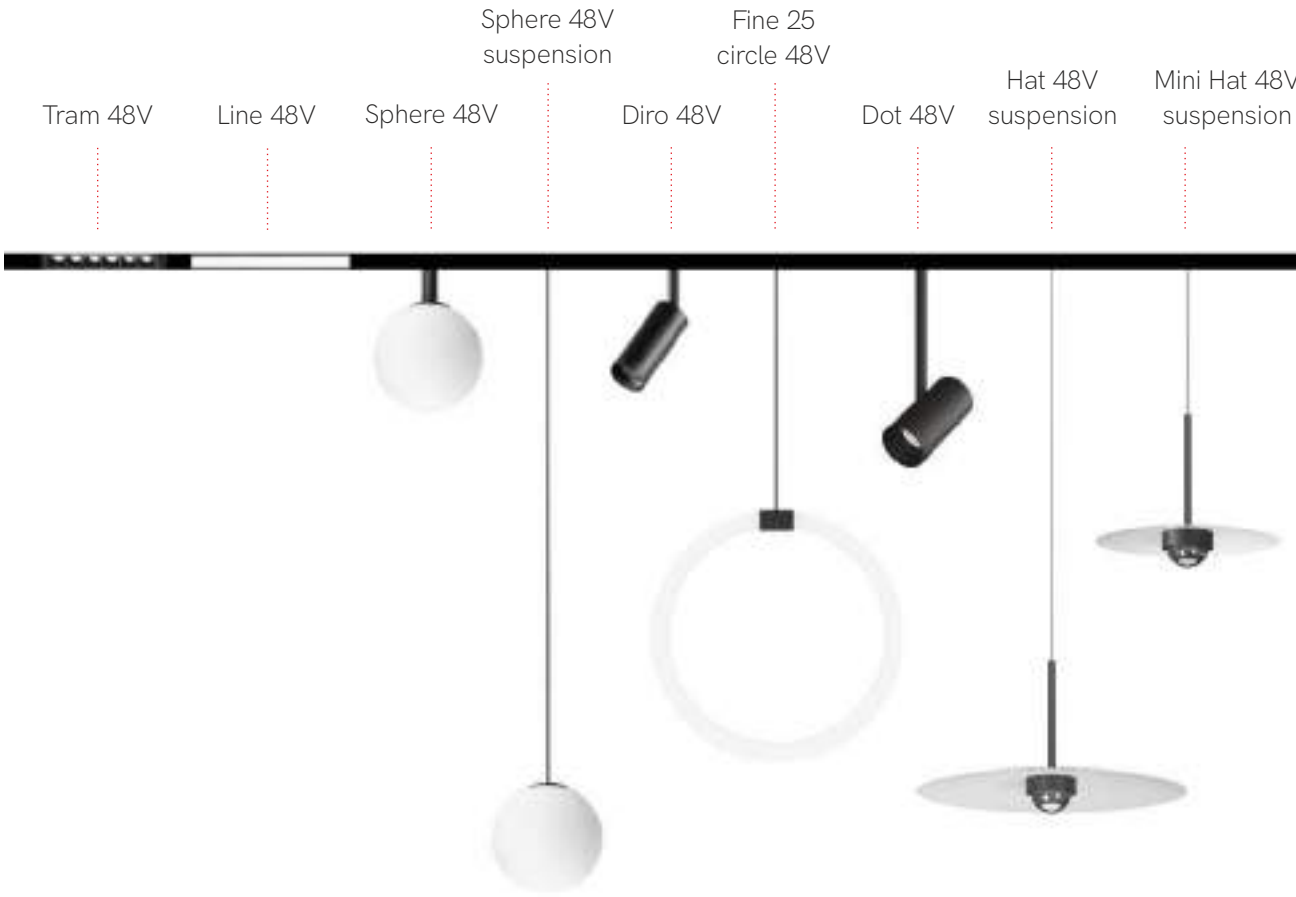



Magnet track 48V



Magnet track 48V

Beneito Faure expands the collection for magnetic track and incorporates the mini Hat, a current trend in decorative lighting.
Thanks to the magnetized system, the spotlights are easily coupled and illuminate when they come into contact with the track.

Beneito Faure amplía la colección para carril magnético e incorpora mini Hat, tendencia actual en iluminación decorativa.
Gracias al sistema imantado los focos se acoplan de forma sencilla y se iluminan cuando entran en contacto con el carril.

Magnet track accessories

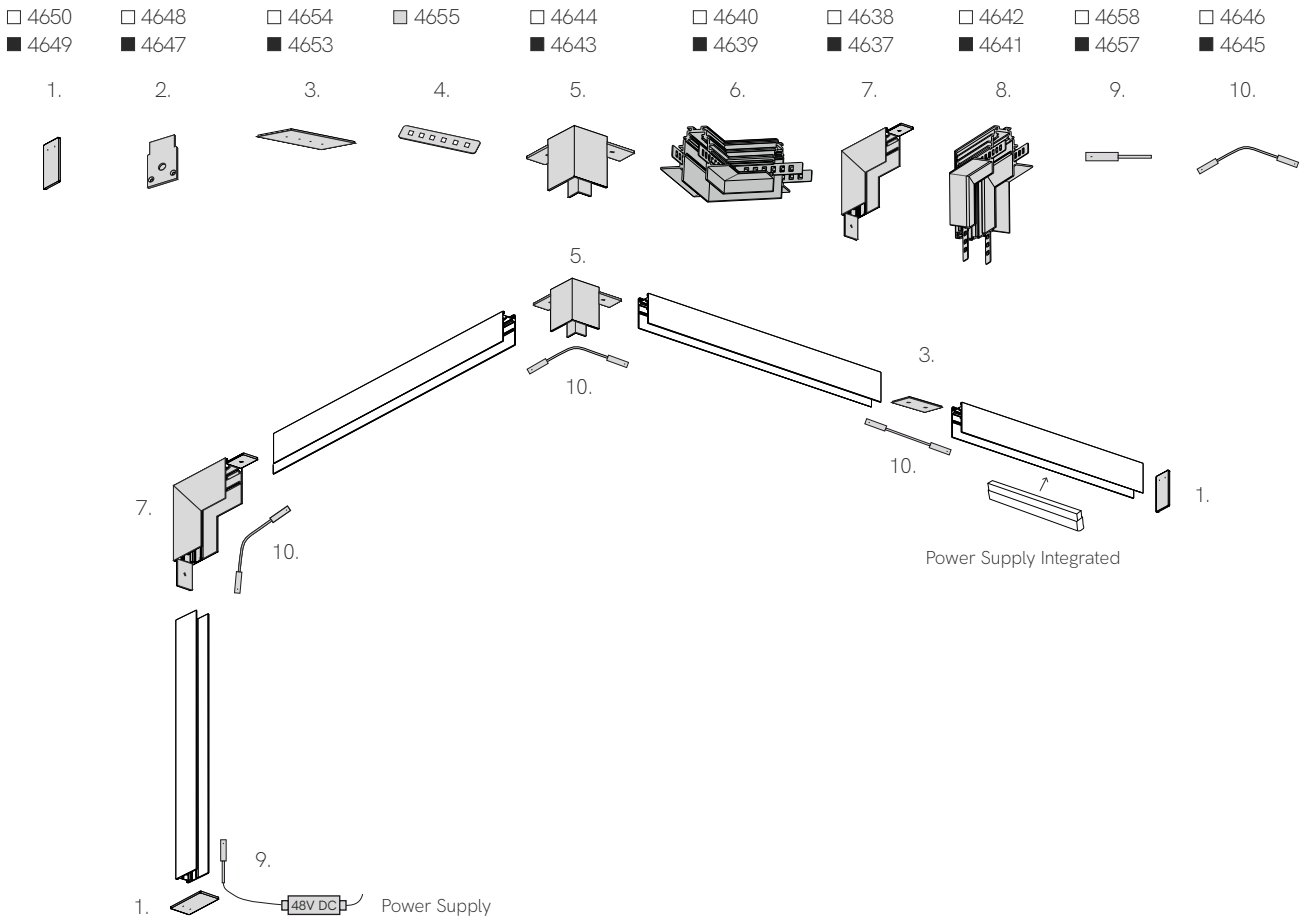

CE RoHS EMC

3 YEARS WARRANTY | IP 20 | III

Power Supplies 48V

Code		Version	Power	IP	VDC OUT	Size
4711	■	Power Supply Basic	60W	IP67	48 VDC	150x53x36mm
4707	▩	Power Supply Top	150W	IP65	48 VDC	219x63x35mm
4708	▩	Power Supply Top	240W	IP65	48 VDC	244x71x37mm
5139	▩	Power Supply Dali	90W	IP67	48 VDC	171x63x38mm
5140	▩	Power Supply Dali	200W	IP67	48 VDC	191x68x40mm
5558	☐	Power Supply Integrated Dali	100W	IP20	48 VDC	325x23x23mm
6023	■	Power Supply Integrated Dali	100W	IP20	48 VDC	325x23x23mm
5559	☐	Power Supply Integrated Dali	250W	IP20	48 VDC	390x23x43mm
6025	■	Power Supply Integrated Dali	250W	IP20	48 VDC	390x23x43mm

5 YEARS WARRANTY | Basic Dali Integrated | Top | PF >0,9



Magnet track 48V surface
W: 26mm H: 53mm

☐	1m	4660
☐	2m	4662
■	1m	4659
■	2m	4661



Magnet track 48V recessed
W: 72mm x H: 55mm

☐	1m	4664
☐	2m	4666
■	1m	4663
■	2m	4665



End cap 48V surface
L: 53mm W: 26.6mm H: 2mm

☐	4650
■	4649



End cap 48V recessed
L: 52mm W: 32mm H: 2mm

☐	4648
■	4647



L joint wall ceiling 48V surface
L: 100mm W: 100mm H: 26mm

☐	4638
■	4637



L joint wall ceiling 48V recessed
L: 100mm W: 100mm H: 72mm

☐	4642
■	4641



L joint 48V ceiling surface
L: 40mm W: 40mm H: 53mm

☐	4644
■	4643



L joint 48V ceiling recessed
L: 100mm W: 100mm H: 55mm

☐	4640
■	4639



Curve magnet track 48V surface
W: 26mm H: 53mm

○	R500 1/4	5317
●	R500 1/4	5319

Curve/straight end cap 48V
L: 53mm W: 26.6mm H: 2mm

☐	4650-N
■	4649-N



Linear joint 48V surface
L: 80mm W: 22.5mm H: 2mm

☐	4654
■	4653



Linear joint 48V recessed
L: 70mm W: 11.5mm H: 1mm

■	4655



Start connector 48V
L: 98mm W: 18mm H: 18mm

☐	4658-N
■	4657-N



Central corner connector 48V
L: 98mm W: 18mm H: 18mm

☐	4646-N
■	4645-N



PVC trim 48V
W: 26.8mm H: 3.5mm

■	1m	4651
■	2m	4652



Suspension kit 48V
L: 45mm W: 22mm | Ø15mm H: 1.900mm

■	4807

Surface Recessed Common



Casambi magnet track control

CASAMBI is a master DALI device, using Bluetooth technology, suitable for monomaster applications, developed to control DALI lamps via mobile devices, using the Casambi app. 64 lamps (control gear) can be programmed, and assigned to up to 8 groups.

Power supply 24Vdc to 48Vdc, not polarized. Fused and protected against voltage peaks.
Two automatic programming modes, Standard and Fast Group, to program new lamps found on the bus.

Allows for the connection of up to 64 DALI lamps (control gear), assigning them to up to 8 groups.
Fixtures available for: Broadcast control, 8 groups, 4 TW groups.
The lamps on the bus are controlled by means of group commands: each lamp will execute only commands sent to its belonging group.

CASAMBI es un dispositivo maestro DALI, con tecnología Bluetooth, adecuado para aplicaciones monomáster, está desarrollado para controlar lámparas DALI a través de dispositivos móviles, utilizando la app Casambi.
Se pueden programar 64 lámparas (equipo de control) y asignarlas a hasta un máximo de 8 grupos.

Fuente de alimentación de 24 Vdc a 48 Vdc, no polarizada, fusionada y protegida contra picos de voltaje. Dos modos de programación automática, Estándar y Grupo Rápido, para programar nuevas lámparas que se encuentren en el bus.

Permite la conexión de hasta 64 lámparas DALI (equipos auxiliares), asignándolas a un máximo de 8 grupos.
Dispositivos disponibles para: Control de difusión, 8 grupos, 4 grupos TW.
Las lámparas del bus se controlan mediante comandos de grupo: cada lámpara ejecutará sólo los comandos enviados a su grupo de pertenencia.



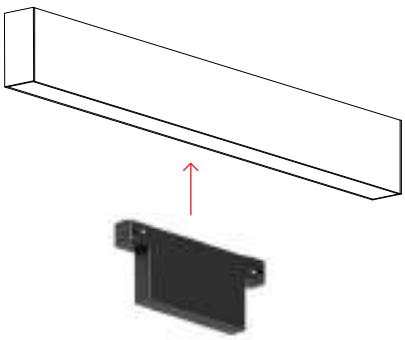

Code	Version	Power	IP	VDC OUT	Size
☐ 6721	Casambi control 48V	8W	IP20	24-48 VDC	142x58x18mm
■ 6722	Casambi control 48V	8W	IP20	24-48 VDC	142x58x18mm

CE RoHS

3 YEARS WARRANTY | 24-48V DC | +40°C -20°C | 1



Alp 48V





Alp 48V suspension





*Need power supply (page 410).

Technical Information

	Alp 48V	Alp 48V suspension
Power	4,5W	4,5W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	260 lm / 270 lm	260 lm / 270 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	4787	○	2.700K	4791
	○	3.000K	4788	○	3.000K	4792
	●	2.700K	4789	●	2.700K	4793
	●	3.000K	4790	●	3.000K	4794
	ⓘ	Custom RAL		ⓘ	Custom RAL	
		1/20			1/25	

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 38° | +40°C -20°C



Mini Bora 48V





Bora 48V suspension





*Need power supply (page 410).

Technical Information

	Mini Bora 48V	Bora 48V suspension
Power	4,5W	8,5W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	315 lm / 325 lm	610 lm / 620 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code						
	○	2.700K	4581	○	2.700K	4573
	○	3.000K	4582	○	3.000K	4574
	●	2.700K	4583	●	2.700K	4575
	●	3.000K	4584	●	3.000K	4576
	●	2.700K	4585	●	2.700K	4577
	●	3.000K	4586	●	3.000K	4578
	●	2.700K	4587	●	2.700K	4579
	●	3.000K	4588	●	3.000K	4580
	UGR <10 | 38°			UGR <15 | 36°		

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | CRI ≥93 | +40°C -20°C | 1/18


▶ VIDEO

Nano Tram 48V





Mini Tram 48V





Curve Tram 48V





*Need power supply (page 410).

Technical Information

	Nano Tram 48V	Mini Tram 48V	Curve Tram 48V
Power	4,5W	9W	6W
Installation	Magnet Track	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	300 lm / 310 lm	690 lm / 710 lm	500 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code	Nano Tram 48V	Mini Tram 48V	Curve Tram 48V
	2.700K 4776	2.700K 4780	2.700K 5309
	3.000K 4777	3.000K 4781	3.000K 5310
	2.700K 4778	2.700K 4782	2.700K 5311
	3.000K 4779	3.000K 4783	3.000K 5312
	26.000 HOURS | 24° | 1/50	26.000 HOURS | 24° | 1/50	30.000 HOURS | 36° | 1/40

CE RoHS

3 YEARS WARRANTY | IP 20 | 48V DC | UGR <19 | CRI ≥90 | +40°C -20°C



Nano Line 48V





Mini Line 48V





Line 48V





Curve Line 48V





*Need power supply (page 410).

Technical Information

	Nano Line 48V	Mini Line 48V	Line 48V	Curve Line 48V
Power	7,5W	15W	30W	8W
Installation	Magnet Track	Magnet Track	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	310 lm / 320 lm	740 lm / 760 lm	1.000 lm / 1.050 lm	300 lm
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black	White / Black

Code	Nano Line 48V	Mini Line 48V	Line 48V	Curve Line 48V
	■ 2.700K 5202	■ 2.700K 5203	■ 2.700K 5204	○ 2.700K 5313
	■ 3.000K 4784	■ 3.000K 4785	■ 3.000K 4786	○ 3.000K 5314
				● 2.700K 5315
				● 3.000K 5316
	26.000 HOURS | 1/25	26.000 HOURS | 1/25	26.000 HOURS | 1/20	30.000 HOURS | 1/40

CE RoHS

3 YEARS WARRANTY | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 100° | +40°C -20°C



Diro 48V





*Need power supply (page 410).

Casambi magnet track control (page 413).

Technical Information

Power	7W
Installation	Magnet Track
Color Temperature	Dali 2.700K - 6.500K
Lumens	420 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 5239
	● 5238

Accessories



Honeycomb anti-glare
(Included)

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 48V DC | UGR <10 | CRI ≥90 | 36° | +40°C -20°C | DALI 2 | 1/20



Ifni Hairdresser, Gipuzkoa (Spain). Design: Basoko.eus Photography: Maider Agirre.

Zoe 48V suspension





*Need power supply (page 410).

Technical Information

Power	7W
Installation	Magnet Track
Color Temperature	2.700K / 3.000K
Lumens	360 lm / 370 lm
Material	Aluminium
Finishes	White / Black

Code			
	△	2.700K	4795
	△	3.000K	4796
	▲	2.700K	4797
	▲	3.000K	4798
ⓘ		Custom RAL	

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | III | 38° | +40°C -20°C | 1/36



Mini Hat 48V suspension



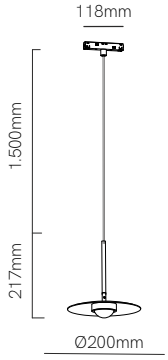

Hat 48V suspension



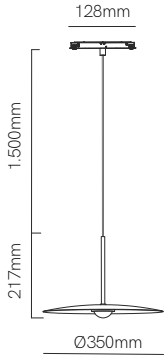

*Need power supply (page 410).

Technical Information

	Mini Hat 48V suspension	Hat 48V suspension
Power	8W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	800 lm	800 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5714	○	2.700K	5363
	○	3.000K	5716	○	3.000K	5364
	●	2.700K	5715	●	2.700K	5366
	●	3.000K	5717	●	3.000K	5367
	70°		1/10	83°		1/5

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | CRI ≥90 | +40°C -20°C



Sphere 48V





Sphere 48V suspension





*Need power supply (page 410).

Technical Information

Power	8W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	430 lm	430 lm
Material	Aluminium and glass	Aluminium and glass
Finishes	White / Black	White / Black

Code						
	○	2.700K	5369	○	2.700K	5375
	○	3.000K	5370	○	3.000K	5376
	●	2.700K	5372	●	2.700K	5378
	●	3.000K	5373	●	3.000K	5379

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | CRI ≥90 | 360° | +40°C -20°C | 1/12



Volt r 48V





Volt sq 48V





*Need power supply (page 410).

Casambi magnet track control (page 413).

Technical Information

	Volt r 48V	Volt sq 48V
Power	8W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	Dali 2.700K - 4.000K	Dali 2.700K - 4.000K
Lumens	570 lm	570 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 5037	□ 5039
	● 5038	■ 5040
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | CRI ≥90 | 38° | IK06 | +45°C -20°C | DALI 2 | 1/20



Dot 48V





*Need power supply (page 410).

Technical Information

Power	11W
Installation	Magnet Track
Color Temperature	2.700K / 3.000K
Lumens	680 lm / 690 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	2.700K	4768
	○	3.000K	4769
	●	2.700K	4770
	●	3.000K	4771
ⓘ		Custom RAL	

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 35° | +40°C -20°C | 1/20



Cookie 48V





Cookie 48V





Cookie 48V suspension





*Need power supply (page 410).

Casambi magnet track control (page 413).

Technical Information

Power	12W	12W	12W
Installation	Magnet Track	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	Dali 2.700K - 4.000K	Dali 2.700K - 4.000K
Lumens	940 lm / 950 lm	500 lm - 700 lm	500 lm - 700 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code				
	○	2.700K	4772	
	○	3.000K	4773	
	●	2.700K	4774	
	ⓘ	Custom RAL		
		26.000 HOURS		
	○		5181	
	●		5182	
	ⓘ		Custom RAL	
			30.000 HOURS | DALI 2	
	○			5185
	●			5186
	ⓘ			Custom RAL
				30.000 HOURS | DALI 2

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 38° | +40°C -20°C | 1/20



Fine 25 circle 48V





*Need power supply (page 410).

Technical Information

Power	19W
Installation	Magnet Track
Color Temperature	3.000K / 4.000K
Lumens	850 lm / 950 lm
Finishes	Aluminium / Black

Code			
	○	3.000K	5431
	○	4.000K	5441
	●	3.000K	5432
	●	4.000K	5442

CE RoHS

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 48V DC | CRI ≥90 | 360° | +40°C -20°C | 1



▶ VIDEO



Outdoor track











Outdoor track accessories



Outdoor Track IP
W: 26mm H: 25mm

☐	5406	1m
☐	5407	2m
☐	5408	3m
■	5409	1m
■	5410	2m
■	5411	3m



L joint ceiling IP
L: 70mm W: 70mm H: 26mm

☐	5412	
■	5413	



L joint wall ceiling IP
L: 70mm W: 70mm H: 30mm

☐	5425	
■	5426	



Linear joint IP
L: 100mm W: 30mm H: 26mm

☐	5414	
■	5415	



End cap IP
L: 62mm W: 30mm H: 26mm

☐	5416	
■	5417	

CE RoHS

3 YEARS WARRANTY | IK06 |

Power Supplies 48V

Code		Version	Power	IP	VDC OUT	Size
4711	■	Power Supply Basic	60W	IP67	48 VDC	150x53x36mm
4707	☐	Power Supply Top	150W	IP65	48 VDC	219x63x35mm
4708	☐	Power Supply Top	240W	IP65	48 VDC	244x71x37mm

5 YEARS WARRANTY | Basic | Top | PF >0,9



Frame 48V IP 1m



Frame 48V IP 2m



Frame 48V IP 3m



*Need power supply (page 441).

Technical Information

Power	10W	20W	30W
Installation	Outdoor Track	Outdoor Track	Outdoor Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	680 lm	1.400 lm	2.055 lm
Material	Silicone	Silicone	Silicone

Code	☐ 2.700K 5400	☐ 2.700K 5402	☐ 2.700K 5404
	☐ 3.000K 5401	☐ 3.000K 5403	☐ 3.000K 5405

Accessories

Waterproof silicone cover IP (Needed when cut Frame)
L: 20mm W: 14mm H: 4mm
☐ 5418

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | CRI ≥90 | 100° | 125mm | IK06 | +45°C -20°C | 1/15



Atmos slim 48V IP

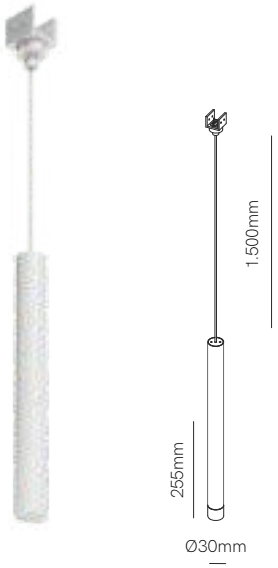

*Need power supply (page 441).

Technical Information

Power	8W
Installation	Outdoor Track
Color Temperature	2.700K / 3.000K
Lumens	510 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	2.700K	5392
	○	3.000K	5393
	●	2.700K	5394
	●	3.000K	5395

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | 38° | IK06 | +45°C -20°C | 1/20



Bit 48V IP





*Need power supply (page 441).

Technical Information

Power	8W
Installation	Outdoor Track
Color Temperature	2.700K / 3.000K
Lumens	630 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	2.700K	5396
	○	3.000K	5397
	●	2.700K	5398
	●	3.000K	5399

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | 55° | IK06 | +45°C -20°C | 1/20



Ice 48V IP





Ice XL 48V IP





*Need power supply (page 441).

Technical Information

Power	10W	20W
Installation	Outdoor Track	Outdoor Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	685 lm	1.110 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	☐	2.700K	5384	☐	2.700K	5388
	☐	3.000K	5385	☐	3.000K	5389
	■	2.700K	5386	■	2.700K	5390
	■	3.000K	5387	■	3.000K	5391
			1/40			1/20

CE RoHS EAC

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | III | 45° | IK06 | +45°C -20°C





Recessed



Nano Argo flat reccesed







Argo recessed







Argo XL recessed







Technical Information

	Nano Argo flat reccesed	Argo recessed	Argo XL recessed
Power	2W	3,5W	3,5W
Driver	3,3 VDC 200 mA	18 VDC 140 mA	18 VDC 140 mA
Installation	Recessed	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	80 lm	125 lm	125 lm
Material	Aluminium and acrylic	Aluminium and acrylic	Aluminium and acrylic
Finishes	White / Black	White / Black	White / Black

Code									
	○	2.700K	5258	○	2.700K	5246	○	2.700K	5252
	○	3.000K	5259	○	3.000K	5247	○	3.000K	5253
	○	4.000K	5260	○	4.000K	5248	○	4.000K	5254
	●	2.700K	5261	●	2.700K	5249	●	2.700K	5255
	●	3.000K	5262	●	3.000K	5250	●	3.000K	5256
	●	4.000K	5263	●	4.000K	5251	●	4.000K	5257

CE RoHS EAC

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥90 | 180° | 50/60 Hz | +40°C -20°C | 1/100


WATCHES



Atom recessed







Technical Information

Power	2W
Driver	3,3 VDC 200 mA
Installation	Recessed
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	90 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	2.700K	5267
	○	3.000K	5268
	○	4.000K	5269
	●	2.700K	5270
	●	3.000K	5271
	●	4.000K	5272

CE RoHS

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C -20°C | 1/100


▶ VIDEO

Micro Zoom recessed



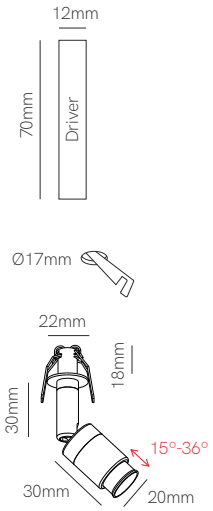

Micro Zoom XL recessed



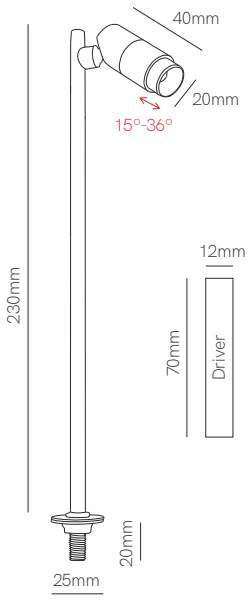

RECESSED

Technical Information

	Micro Zoom recessed	Micro Zoom XL recessed
Power	2W	2W
Driver	3 VDC 200 mA	3 VDA 200 mA
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	70 lm	70 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5273	○	2.700K	5279
	○	3.000K	5274	○	3.000K	5280
	○	4.000K	5275	○	4.000K	5281
	●	2.700K	5276	●	2.700K	5282
	●	3.000K	5277	●	3.000K	5283
	●	4.000K	5278	●	4.000K	5284
			1/100			1/50

CE RoHS EAC

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 15°-36° | 50/60 Hz | +40°C -20°C



Ribera Manero, seafood restaurant, Barcelona (Spain).

Nano Pulsar r / sq recessed







Nano Pulsar r / sq trim



*Need Nano Pulsar



Nano Pulsar r / sq surface





Technical Information

	Nano Pulsar r / sq recessed	Nano Pulsar r / sq trim	Nano Pulsar r / sq surface
Power	3,5W	-	-
Driver	4,7 VDC 700 mA	-	-
Installation	Recessed	Recessed	Surface
Color Temperature	2.700K / 3.000K / 4.000K	-	-
Lumens	170 lm / 180 lm / 200 lm	-	-
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White-matt gold/Black-matt gold	White / Black

Code					
	○	2.700K	4297	5208	○ 4410
	○	3.000K	4298	5209	● 4411
	○	4.000K	4299	5210	□ 4412
	●	2.700K	4300	5211	■ 4413
	●	3.000K	4301		ⓘ Custom RAL
	●	4.000K	4302		
	□	2.700K	4451		
	□	3.000K	4452		
	□	4.000K	4453		
	■	2.700K	4454		
	■	3.000K	4455		
	■	4.000K	4456		
ⓘ		Custom RAL			
	1/50			1/4/300	1/50

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,5 | CRI ≥80 | 30° | 50/60 Hz | +40°C -20°C



Masia, Solsonès, Lleida (Spain). Design: BECOinteriors Photography: @marsimal

Pulsar dimm recessed





Pulsar trim



*Need Pulsar





Asymmetric

Pulsar surface accessory



*Need Pulsar



Technical Information

	Pulsar dimm recessed	Pulsar trim	Pulsar surface accessory
Power	8W	-	-
Driver	DOB	-	-
Installation	Recessed	Recessed	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	-	-
Lumens	780 lm / 800 lm / 840 lm	-	-
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black / White-matt gold / Black-matt gold	White / Black

Code			
	○ 5057	◐ 5206	○ 5110
	● 5058	◑ 5207	● 5111
	ⓘ Custom RAL	○ 5059 Asymmetric	ⓘ Custom RAL
		● 5060 Asymmetric	
		◐ 5212 Asymmetric	
		◑ 5213 Asymmetric	
		ⓘ Custom RAL	
	1/10/30	1/50	1/20

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,9 | CRI ≥85 | 40° | 50/60 Hz | TRIAC DIMM | RT 2012 REGLEMENTATION THERMIQUE | +45°C -20°C | CCT SWITCH



Nano Oxo r recessed	Nano Oxo sq recessed
	
	
	

Technical Information

Power	4W	4W
Driver	40 VDC 100mA	40 VDC 100mA
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	380 lm	380 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 4549-N	□ 4550-N
	● 4551-N	■ 4552-N
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 45° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/10/50



Mini Oxo r recessed





Mini Oxo sq recessed





Technical Information

	Mini Oxo r recessed	Mini Oxo sq recessed
Power	6W	6W
Driver	DOB	DOB
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm	600 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black

Code				
	○	5061	□	5108
	●	5062	■	5109

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 42° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20



	Mini Oxo rect 2 recessed	Mini Oxo rect 4 recessed	Mini Oxo rect 6 recessed
			
			
			

Technical Information

Power	12W	24W	36W
Driver	DOB	DOB	DOB
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.200 lm	2.400 lm	3.600 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black	White / Black
Code	☐ 5063 ■ 5064	☐ 5065 ■ 5066	☐ 5067 ■ 5068
	1/10	1/10	1/5

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 42° | 50/60 Hz | +40°C -20°C | CCT SWITCH



Institut Ferrés Amat, Barcelona (Spain). Lighting project: Vé il·luminació. Architecture: Pablo Amorós.

Oxo r dimm recessed







Oxo sq dimm recessed







Technical Information

	Oxo r dimm recessed	Oxo sq dimm recessed
Power	12W	12W
Driver	40 VDC 300 mA	40 VDC 300 mA
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.260 lm	1.260 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	○ 4457-D(N)	□ 4459-D(N)
	● 4458-D(N)	■ 4460-D(N)
	ⓘ Custom RAL	ⓘ Custom RAL

Accessories

Included with:
4457-D(N) / 4459-D(N)



Included with:
4457-D(N) / 4458-D(N) / 4459-D(N) / 4460-D(N)

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,9 | CRI ≥90 | 15° 38° 60° | 50/60 Hz | TRIAC DIMM | +50°C -20°C | CCT SWITCH | 1/20



Casa Aliso, Vitoria (Spain). Interior design: WOOD STUDIO. Photography: Vicugo Studio.

Mini Bora recessed





Bora recessed





Technical Information

Power	4,5W	8,5W
Driver	12 VDC 350mA	18 VDC 350mA
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	290 lm / 300 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code						
	○	2.700K	4589	○	2.700K	4597
	○	3.000K	4590	○	3.000K	4598
	●	2.700K	4591	●	2.700K	4599
	●	3.000K	4592	●	3.000K	4600
	●	2.700K	4593	●	2.700K	4601
	●	3.000K	4594	●	3.000K	4602
	●	2.700K	4595	●	2.700K	4603
	●	3.000K	4596	●	3.000K	4604
	UGR <10 | PF >0,5 | 38°			UGR <15 | PF >0,6 | 36°		

CE RoHS EAC

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | CRI ≥93 | 50/60 Hz | +40°C -20°C | 1/18



Nano Tram recessed



Mini Tram recessed



Tram recessed

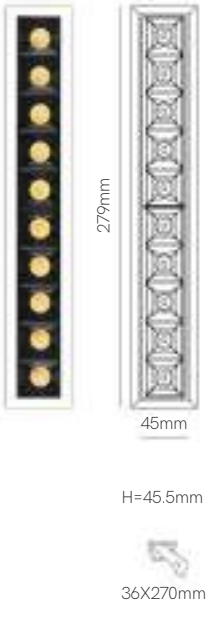

Tram XL recessed

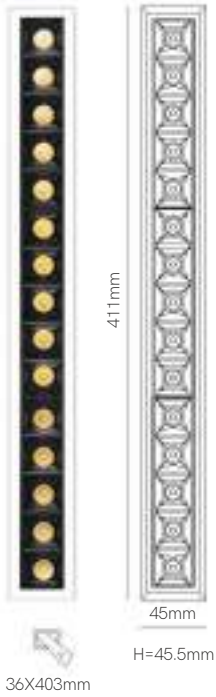

*Tuya version need Tuya Smart App to work.

Technical Information

Power	6W	10W	20W	30W
Driver	24 VDC 250mA	42 VDC 350mA	42 VDC 550mA	42 VDC 800mA
Installation	Recessed	Recessed	Recessed	Recessed
Color Temperature	Tuya 2.700K - 6.000K	Dali 2.700K - 6.000K	Tuya 2.700K - 6.000K	Tuya 2.700K -6.000K
Lumens	220 lm	500 lm	1.000 lm	1.500 lm
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black	White / Black
Code	☐ 4731 Tuya	☐ 4733-V2	☐ 4735 Tuya	☐ 4737
	■ 4732-V2 Dali	■ 4734-V2	■ 4736-V2 Dali	■ 4738
	1/50	1/40	1/50	1/20

Accessories



Tuya Gateway Wifi
☐ 4956

CE RoHS

*See page 324 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,9 | CRI ≥90 | 30° | 50/60 Hz | IK06 | +40°C -10°C



Compac r recessed





Compac sq recessed





Technical Information

	Compac r recessed	Compac sq recessed
Power	8W	8W
Driver	DOB	DOB
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	594 lm / 607 lm / 660 lm	594 lm / 607 lm / 660 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White

Code					
	○	2.700K	3951	☐ 2.700K	3948
	○	3.000K	3952	☐ 3.000K	3949
	○	4.000K	3953	☐ 4.000K	3950
	ⓘ Custom RAL			ⓘ Custom RAL	

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | PF >0,5 | CRI ≥80 | 90° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | 1/6/30



Casa Aliso, Vitoria (Spain). Interior design: WOOD STUDIO. Photography: Vicugo Studio.

Pulcom r recessed	Pulcom sq recessed	Pulcom r recessed asymm	Pulcom sq recessed asymm



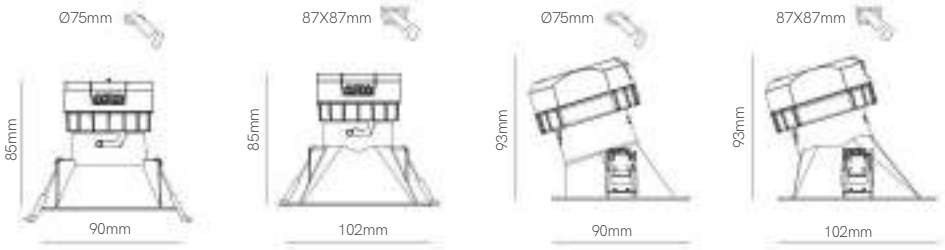

Technical Information

Power	8W	8W	8W	8W
Driver	DOB	DOB	DOB	DOB
Installation	Recessed	Recessed	Recessed	Recessed
Color Temperature (Switch)	2.700K/3.200K/4.000K	2.700K/3.200K/4.000K	2.700K/3.200K/4.000K	2.700K/3.200K/4.000K
Lumens	800 lm	800 lm	800 lm	800 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black	White / Black	White / Black

Code				
	4742	4744	4743	4745
	4746	4748	4747	4749
	Custom RAL	Custom RAL	Custom RAL	Custom RAL

CE RoHS

Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/5/20



Pulcom led accessory





Pulcom trim









Pulcom asymm trim









Pulcom r surface





*Pulcom trim and surface need Pulcom led.

Technical Information

	Pulcom led accessory	Pulcom trim	Pulcom asymm trim	Pulcom r surface
Power	8W	-	-	-
Driver	DOB	-	-	-
Installation	Surface / Recessed	Recessed	Recessed	Surface
Color Temperature	2.700K / 3.200K / 4.000K	-	-	-
Lumens	800 lm	-	-	-
Material	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black / Wood	White / Black	White / Black / Wood
Code	○ 4763	○ 4761	○ 4821	○ 5034
	● 4764	● 4762	● 4822	● 5035
		● 4935	□ 4825	● 5036
		□ 4823	■ 4826	ⓘ Custom RAL
		■ 4824	ⓘ Custom RAL	
		ⓘ Custom RAL		
	1/100	1/100	1/100	1/50

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH



New

Tao recessed





Technical Information

Power	10W
Driver	25-42vdc / 250mA
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	590 lm / 740 lm / 680 lm
Material	Aluminium
Finishes	White / Black

Code		
	○	5718
	●	5719
ⓘ		Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 32° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/30



Noi recessed



Noi dimm recessed



Technical Information

Power	14W	14W
Driver	DOB	DOB
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	3.000K / 4.000K
Lumens	1.320 lm	1.100 lm / 1.320 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White

Code			
	○ 5019	○ 3.000K	3485
		○ 4.000K	3486

100/277 VAC | CCT SWITCH

220/240 VAC | TRIAC DIMM

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | 1/6



Mini Thessis recessed





Thessis recessed





Thessis XL recessed





RECESSED

Technical Information

	Mini Thessis recessed	Thessis recessed	Thessis XL recessed
Power	15W	25W	35W
Driver	DOB	DOB	DOB
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.300 lm	2.625 lm	3.100 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White / Black	White / Black	White
Code	○ 4766	○ 4236	○ 5030
	● 4987	● 4988	ⓘ Custom RAL
	ⓘ Custom RAL	ⓘ Custom RAL	
	UGR <19 | 1/10	UGR <19 | 1/6	1/6

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥85 | 90° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH



Mini Thessis dimm recessed





Thessis dimm recessed





Technical Information

	Mini Thessis dimm recessed	Thessis dimm recessed
Power	15W	25W
Driver	DOB	DOB
Installation	Recessed	Recessed
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.300 lm	2.625 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White / Black	White / Black

Code		
	○ 4767	○ 4691
	● 5574	● 5575
	ⓘ Custom RAL	ⓘ Custom RAL
	1/10	1/6

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥85 | 90° | 50/60 Hz | IK06 | TRIAC DIMM | +40°C -20°C | CCT SWITCH



Air recessed



Technical Information

Power	22W
Driver	DOB
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.200 lm
Material	Polybutylene and Polycarbonate
Finishes	White

Code	○ 5018

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 100/277 VAC | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/6



Bonn recessed



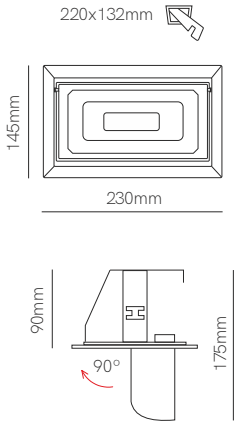

Technical Information

Power	40W
Driver	42vdc / 850mA
Installation	Recessed
Color Temperature	3.000K / 4.100K
Lumens	4.750 lm / 4.800 lm
Material	Aluminium
Finishes	White / Gray

Code			
	☐	3.000K	4097
	☐	4.100K	4096
	■	3.000K	4099
	■	4.100K	4098
ⓘ		Custom RAL	

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

5 YEARS WARRANTY | 30.000 HOURS | | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 100° | 50/60 Hz | | | +40°C -20°C | 1/12



Fijo recessed





Basculante recessed





Eclipse recessed





Fijo Basculante Eclipse

*G5.3 Bulbholder included.

Technical Information

	Fijo recessed	Basculante recessed	Eclipse recessed
Installation	Recessed	Recessed	Recessed
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Gray / Brushed chrome	White / Gray / Brushed chrome	Gray / Brushed chrome
Bulbholder	50mm G5.3	50mm G5.3	50mm G5.3

Code	Fijo recessed	Basculante recessed	Eclipse recessed
	○ 206280M	○ 205280M	▢ 222230
	● 206284AL	● 205284AL	▢ 222238
	● 206285AL	● 205285AL	ⓘ Custom RAL
	ⓘ Custom RAL	ⓘ Custom RAL	

Accessories



Bulbholder GU10

○ 301182

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/50

RECESSED



One recessed





Zio recessed





One Zio

*GU10 Bulbholder included, except 258226C and 257226C.

Technical Information

	One recessed	Zio recessed
Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White / Black / Brushed alumin.	White / Black / Brushed alumin.
Bulbholder	50mm GU10	50mm GU10
Code	○ 4478	□ 4476
	● 4479	■ 4477
	○ 258226C	□ 257226C
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/50



Luk r recessed





Luk r recessed IP





Luk sq recessed IP





*IP20 includes GU10 Bulbholder, IP65 includes G5.3 Bulbholder.

Technical Information

Installation	Recessed	Recessed	Recessed
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Bulbholder	50mm GU10	50mm G5.3	50mm G5.3
Code	○ 4758	○ 5214	□ 5216
	● 4759	● 5215	■ 5217
	ⓘ Custom RAL	ⓘ Custom RAL	ⓘ Custom RAL
	IP 20	IP 65	IP 65

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 1/100

RECESSED



Bathroom recessed



Rok recessed







Bathroom Rok

*G5.3 Bulbholder included.

Technical Information

Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White / Brushed aluminium	White / Black / Brushed chrome
Bulbholder	50mm G5.3	50mm G5.3

Code		
	○ 223232	○ 4755
	● 223233	● 4756
		● 4757
		ⓘ Custom RAL
	IP 44	IP 65

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 1/50



Avant r recessed





Avant sq recessed





*GU10 Bulbholder included.

Technical Information

	Avant r recessed	Avant sq recessed
Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Bulbholder	111mm GU10	111mm GU10
Code	○ 4486	□ 4484
	● 4487	■ 4485
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/20



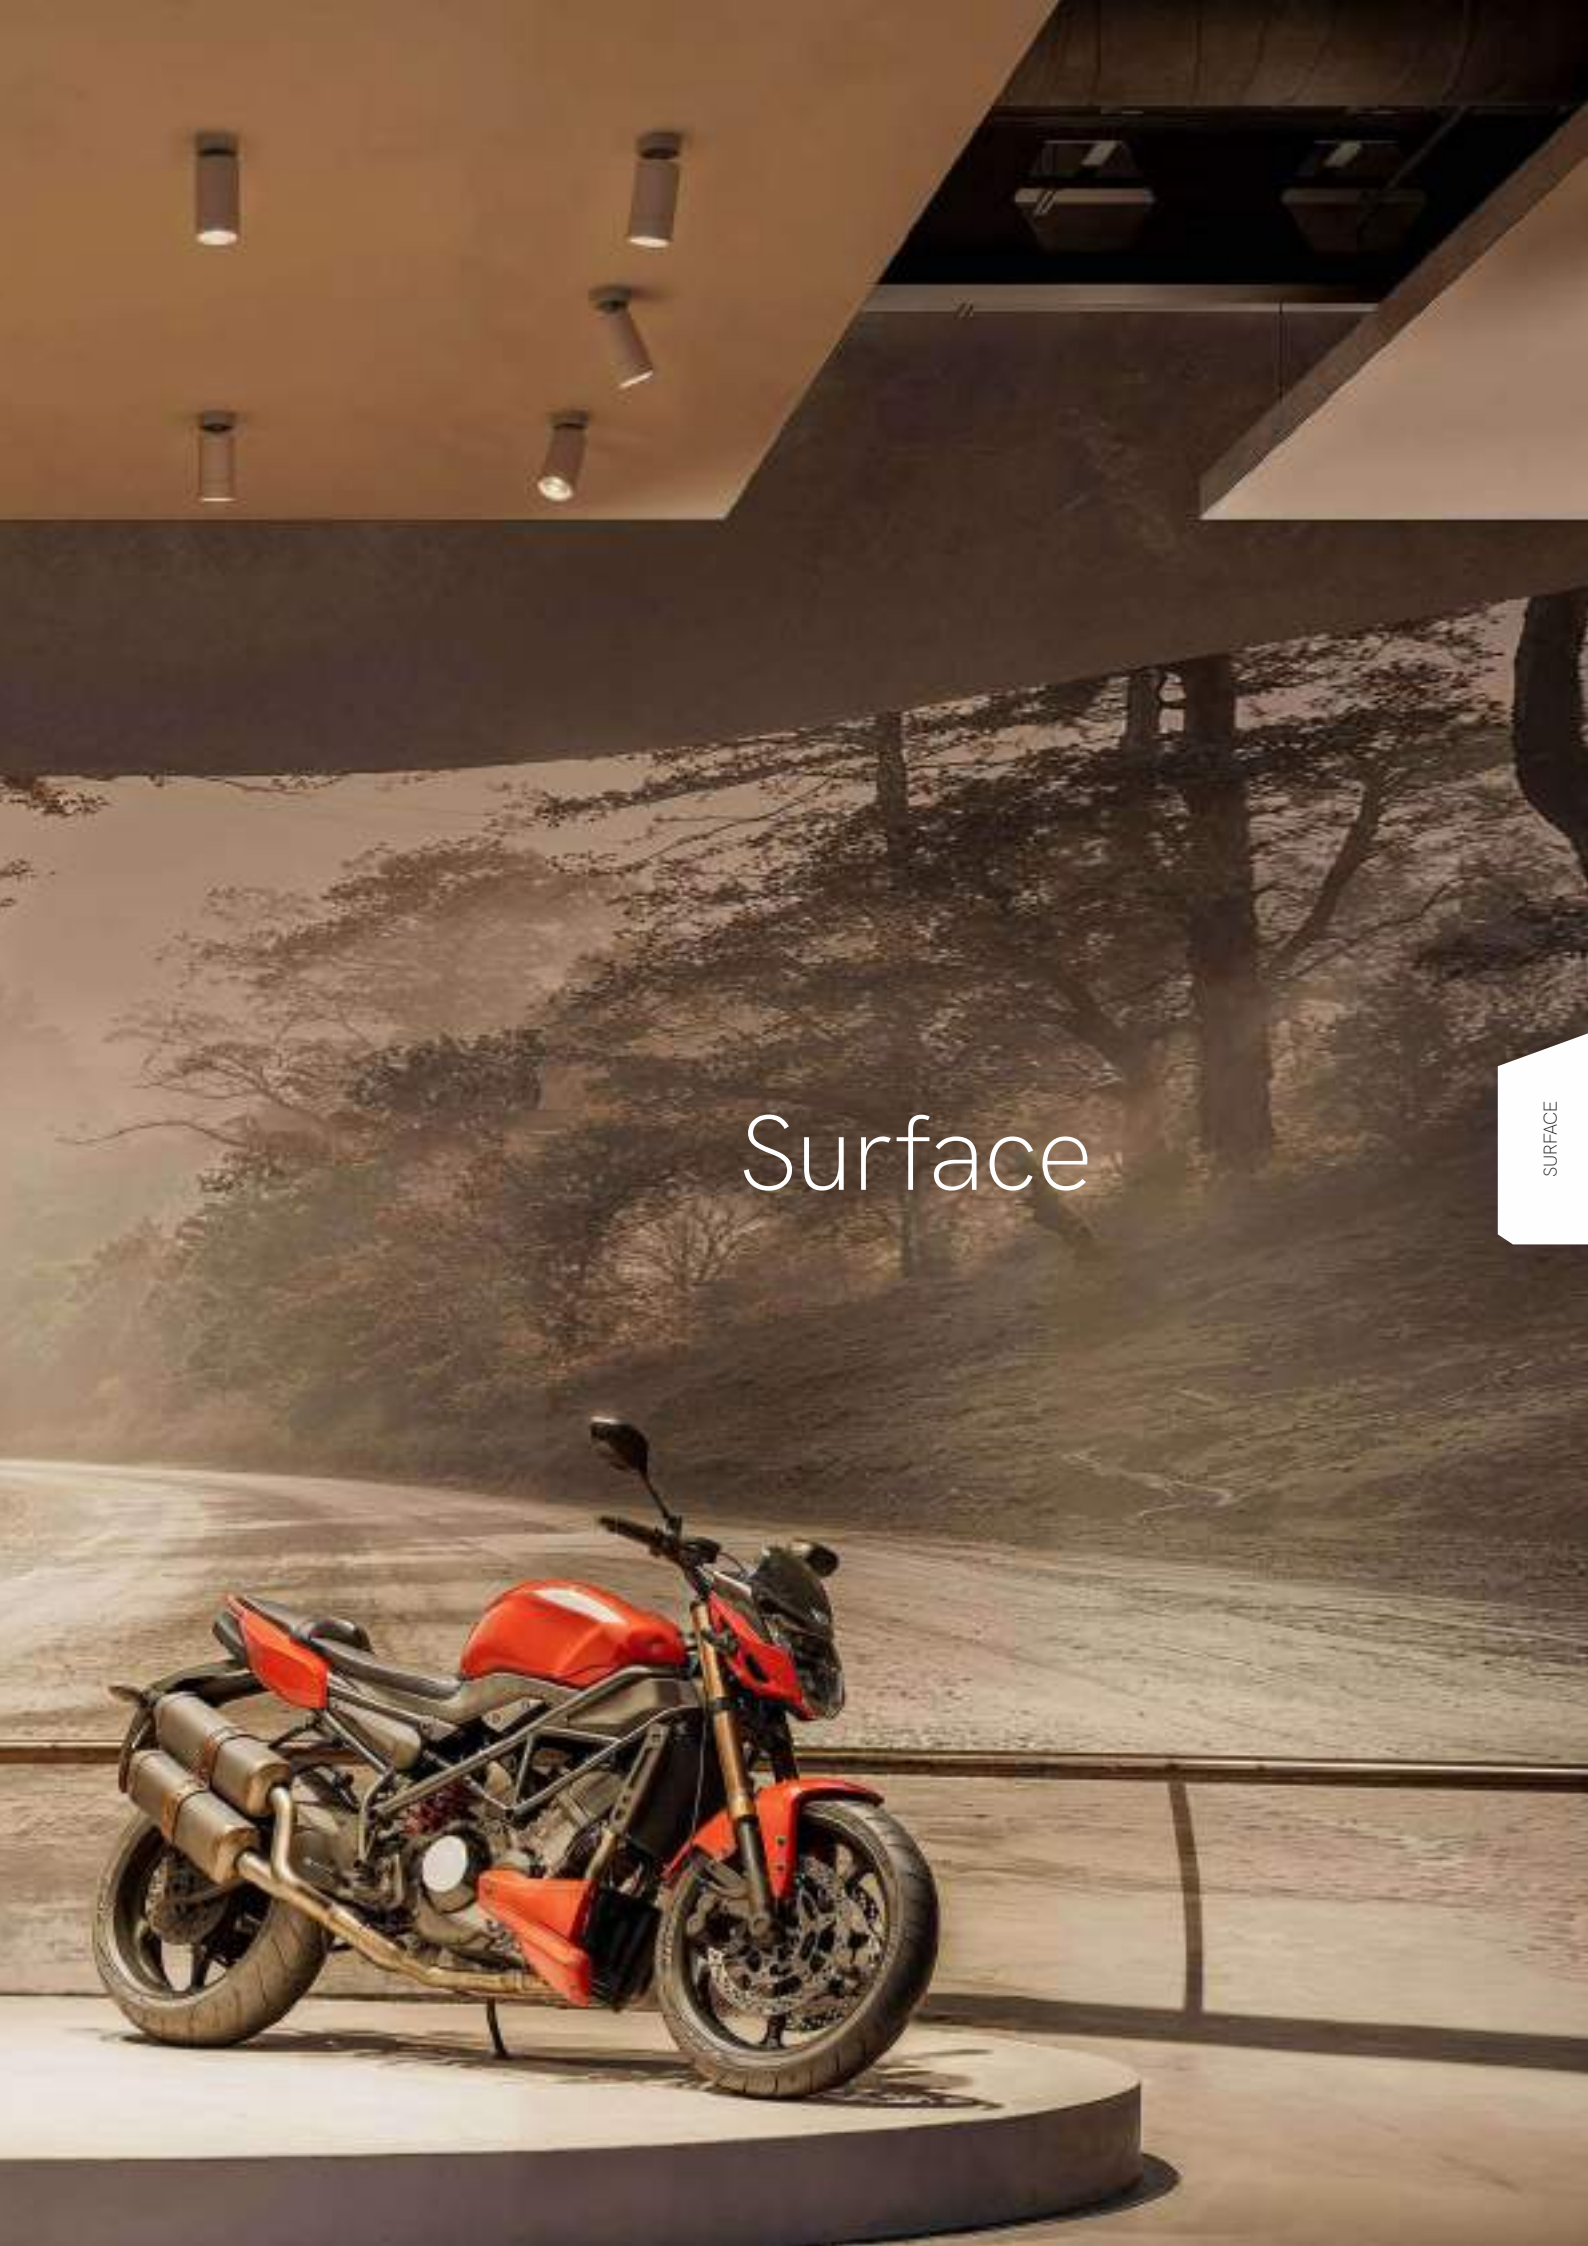

Surface

Nano Golf surface



Mini Golf surface



Technical Information

	Nano Golf surface	Mini Golf surface
Power	3,5W	3,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	125 lm	125 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5285	○	2.700K	5291
	○	3.000K	5286	○	3.000K	5292
	○	4.000K	5287	○	4.000K	5293
	●	2.700K	5288	●	2.700K	5294
	●	3.000K	5289	●	3.000K	5295
	●	4.000K	5290	●	4.000K	5296

CE RoHS

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI >90 | 24° | 50/60 Hz | +40°C -20°C | 1/10

Golf surface

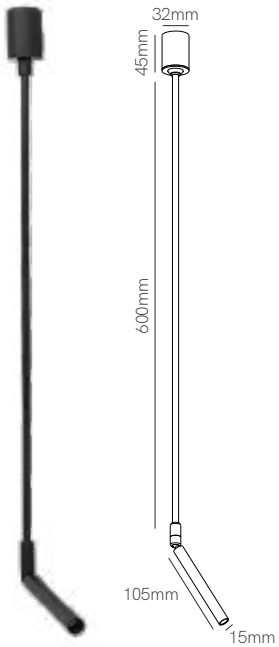

Golf XL surface

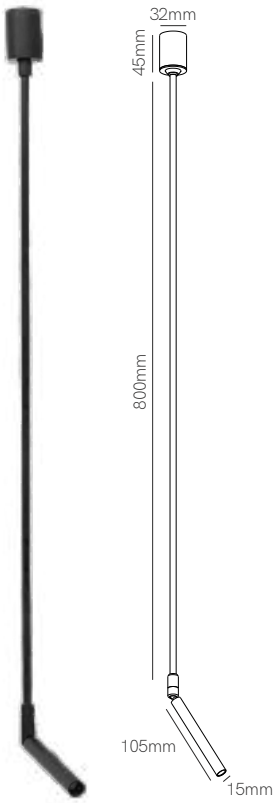

Technical Information

	Golf surface	Golf XL surface
Power	3,5W	3,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	125 lm	125 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	○	2.700K	5297	○	2.700K	5303
	○	3.000K	5298	○	3.000K	5304
	○	4.000K	5299	○	4.000K	5305
	●	2.700K	5300	●	2.700K	5306
	●	3.000K	5301	●	3.000K	5307
	●	4.000K	5302	●	4.000K	5308

CE RoHS

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI >90 | 24° | 50/60 Hz | +40°C -20°C | 1/10



Mini Bora surface





Bora surface





Technical Information

	Mini Bora surface	Bora surface
Power	4,5W	8,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	290 lm / 300 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code						
	○	2.700K	4621	○	2.700K	4629
	○	3.000K	4622	○	3.000K	4630
	●	2.700K	4623	●	2.700K	4631
	●	3.000K	4624	●	3.000K	4632
	●	2.700K	4625	●	2.700K	4633
	●	3.000K	4626	●	3.000K	4634
	●	2.700K	4627	●	2.700K	4635
	●	3.000K	4628	●	3.000K	4636
	UGR <10 | PF >0,5 | 38°			UGR <15 | PF >0,6 | 36°		

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | CRI ≥93 | 50/60 Hz | +40°C -20°C | 1/18



Alp surface





Technical Information

Power	4,5W
Installation	Surface
Color Temperature	2.700K / 3.000K
Lumens	220 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	2.700K	5357
	○	3.000K	5358
	●	2.700K	5360
	●	3.000K	5361

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 36° | 50/60 Hz | +40°C -20°C | 1/18



Plus surface







Technical Information

Power	8W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.040 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 4522
	● 4523
ⓘ	Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 15° 35° 60° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20


▶ VIDEO

Mini Concord surface







Concord surface







SURFACE

Technical Information

	Mini Concord surface	Concord surface
Power	7W	14W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	850 lm	1.205 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 4334-N	○ 5071
	● 4335-N	● 5072
	ⓘ Custom RAL	ⓘ Custom RAL
	CRI ≥80 | 1/30	CRI ≥97 | 1/4/12

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | 40° | 50/60 Hz | +40°C -10°C | TRIAC DIMM | CCT SWITCH



Mini Rubyc surface







Rubyc surface







Technical Information

	Mini Rubyc surface	Rubyc surface
Power	7W	14W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	850 lm	1.205 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 4332-N	☐ 5069
	■ 4333-N	■ 5070
	ⓘ Custom RAL	ⓘ Custom RAL
	CRI ≥80 | 1/30	CRI ≥97 | 1/4/12

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | 40° | 50/60 Hz | +40°C -10°C | TRIAC DIMM | CCT SWITCH



Volt r base



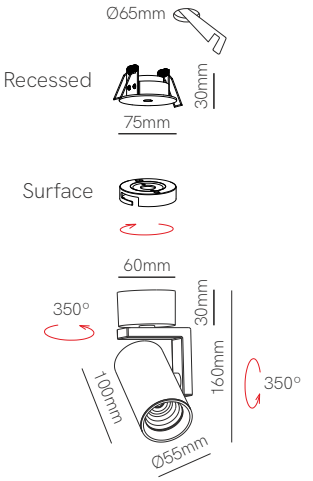

Volt sq base



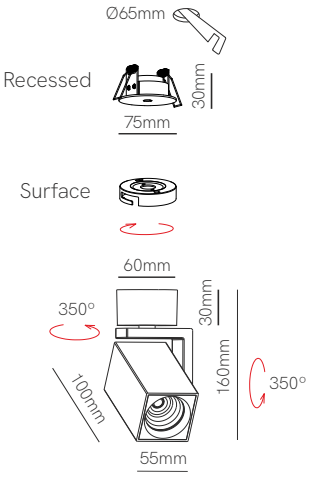

SURFACE

*Included surface base (mounted) and recessed base (not mounted).

Technical Information

	Volt r base	Volt sq base
Power	8W	8W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	570 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	○ 5041	□ 5043
	● 5042	■ 5044
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | PF >0,9 | CRI ≥90 | 38° | IK06 | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20


1

Volt r3 surface





Volt sq3 surface





Technical Information

	Volt r3 surface	Volt sq3 surface
Power	24W	24W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.700 lm	1.700 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	○ 5045	□ 5047
	● 5046	■ 5048
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | PF >0,9 | CRI ≥90 | 38° | IK06 | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/10

Volt r GU10 base







Volt sq GU10 base







*Included surface base (mounted) and recessed base (not mounted).

Technical Information

Installation	Surface / Recessed	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)

Code		
	5049	5051
	5050	5052
	Custom RAL	Custom RAL

CE RoHS

Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | IK06 | 1/20

Volt r3 GU10 surface



Base width 75mm



Volt sq3 GU10 surface



Base width 75mm



Technical Information

Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)

Code	5053	5055
	5054	5056
	Custom RAL	Custom RAL

CE RoHS

Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | IK06 | 1/10



Picolo base



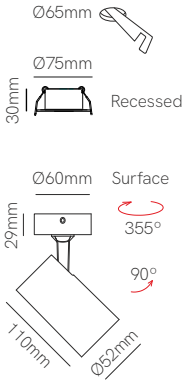

Technical Information

Power	9,5W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.300 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 4833-N
	● 4834-N
ⓘ	Custom RAL

CE RoHS EAC

ⓘ Consult delivery terms and conditions.
*Surface and recessed base included.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/20


RUINS

Picolo GU10 surface



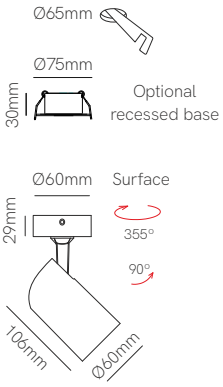

Picolo AR111 surface



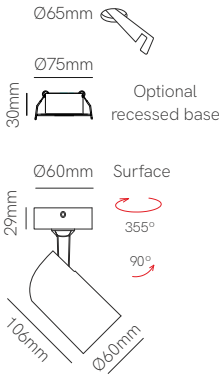

GU10 AR111

Technical Information

	Picolo GU10 surface	Picolo AR111 surface
Installation	Surface / Recessed	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White
Bulbholder	50mm GU10 (except Power bulb)	111mm GU10
Code	○ 4050	○ 4433
	● 4049	ⓘ Custom RAL
	ⓘ Custom RAL	

ⓘ Consult delivery terms and conditions.

Accessories



Recessed base (not included)
○ 4835 ● 4836

CE RoHS

*GU10 bulbholder included.

5 YEARS WARRANTY | IP 20 | 220/240 VAC | 1/40


VIDEO

Crown base



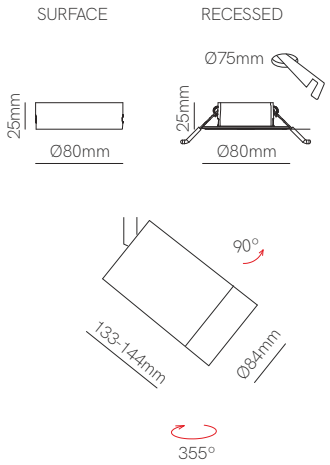

Technical Information

Power	25W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.300 lm
Material	Aluminium and polycarbonate
Finishes	White / Black

Code	
	○ 5224
	● 5225

CE RoHS

Includes surface and recessed base (not mounted).

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 24° - 60° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20



Mini Kora r surface





Kora r surface





Technical Information

Power	20W	25W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	2.400 lm	3.000 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	○ 4832	○ 4500-V2

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +45°C -25°C | CCT SWITCH | 1/5



Mini Kora sq surface





Kora sq surface





Technical Information

Power	20W	25W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	2.400 lm	3.000 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	☐ 4831	☐ 4499-V2

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +45°C -25°C | CCT SWITCH | 1/5



Casa Patio, Gran Canaria (Spain). Architecture: Room C Studio. Building contractor: Marcelasa SL. Photography: David Rodríguez.

Nox surface





Technical Information

Power	30W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.460 lm
Material	Aluminium
Finishes	White / Black

Code	○ 4241-N
	● 4242-N
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

Included with:
4241-N



Included with:
4241-N / 4242-N

CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥94 | 15° 24° 40° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/8



One surface





Zio surface





Avant r surface





One Zio Avant

*GU10 Bulbholder included.

Technical Information

	One surface	Zio surface	Avant r surface
Installation	Surface	Surface	Surface
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)	111mm GU10
Code	○ 4480	□ 4482	○ 4933
	● 4481	■ 4483	● 4934
	ⓘ Custom RAL	ⓘ Custom RAL	ⓘ Custom RAL
	1/20	1/20	1/10

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 |





Suspension

Create your own design with **Space**

Space is a lighting concept that seeks to be part of the design and finishes of a room. This lighting system creates an unlimited number of lines and compositions that are born out of a surface base. The final design is left to the user, who can select and customize the distribution of the luminaire in the space.

Space es un concepto de iluminación que busca formar parte del diseño y acabados de un espacio. Este sistema de iluminación crea trazos y composiciones ilimitadas que nacen de una base de superficie. El diseño final queda en manos del usuario, el cual puede escoger y personalizar como distribuye la luminaria a través del espacio.



This innovative system allows you to create spectacular vertical suspended compositions by means of a unique and incomparable design. With our decorative spotlights it is possible to create entirely customizable light points at different heights. The Space system, supported by a thread up to six meters long, is compatible with Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL and Lievo XL decorative products. Choose the size of the base that best suits the composition among different diameters and create your own luminaire.

Este innovador sistema permite crear composiciones colgantes verticales espectaculares a través de un diseño único e irrepetible. Con nuestros spotlights decorativos es posible crear puntos de luz a distintas alturas totalmente personalizables. El sistema Space, sostenido por un hilo de hasta seis metros de largo, es compatible con los productos decorativos Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL y Lievo XL. Escoge el tamaño de la base que mejor se adapte a la composición entre distintos diámetros y crea tu propia luminaria.





The light points of the Space system can be moved away from the base and brought to any place desired though the wire holder. It is a piece that is mounted on the surface of the ceiling to support the conductor wire of the lighting structure. This system of hanging lamps gives total freedom to architects and interior designers to create repetitions of light that can compose from chaotic structures to the most symmetrical. If you have a false ceiling where the driver can rest, you can use the system with the individual recessed base, a great option for integrating the structure in an elegant way.

Los puntos de luz del sistema Space pueden alejarse de la base y llevarse a cualquier ubicación deseada a través del wire holder. Se trata de una pieza que se instala en la superficie del techo para sostener el hilo conductor de la estructura lumínica. Este sistema de lámparas colgantes ofrece una total libertad a arquitectos e interioristas para crear repeticiones de luz que pueden componer desde estructuras caóticas, hasta las más simétricas. En caso de contar con un falso techo donde pueda reposar el driver, puedes usar el sistema con la base individual de encastrar, una muy buena opción para integrar de forma elegante la estructura.



New

Sphere space



Technical Information

Power	8W
V / I in	36-48vdc / 200mA
Installation	Surface / Recessed
Color Temperature	2.700K / 3.000K
Lumens	255 lm
Material	Aluminium and glass
Finishes	White / Black

Code			
	○	2.700K	7017
	○	3.000K	7018
	●	2.700K	7019
	●	3.000K	7020

Accessories



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | UGR <19 | CRI ≥90 | Nano base | Side/front base | 360° | +40°C -20°C | 1/12

New

Mini Hat space





Hat space





Technical Information

	Mini Hat space	Hat space
Power	8W	8W
V / I in	36-48vdc / 200mA	36-48vdc / 200mA
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	800lm	835 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code					
	○	2.700K	7009	○ 2.700K	7013
	○	3.000K	7010	○ 3.000K	7014
	●	2.700K	7011	● 2.700K	7015
	●	3.000K	7012	● 3.000K	7016
	70°		1/10	83°	1/5

Accessories



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | CRI ≥90 | Nano base | Side / front base | +40°C -20°C

beneito-faure.com

New

Cookie space





*Base not included. You need to choose a base to complete the instalation.

Technical Information

Power	12W
V / I in	25-40vdc / 300mA
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black

Code	
	○ 7007
	● 7008
ⓘ	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | UGR <19 | CRI ≥90 | Nano base | Side / front base | 38° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20

New

Atmos slim space





Technical Information

Power	6W
V / I in	25-42vdc / 120mA
Installation	Surface / Recessed
Color Temperature	2.700K / 3.000K
Lumens	380 lm / 415 lm
Material	Aluminium
Finishes	White / Black

Code			
	○	2.700K	7021
	○	3.000K	7022
	●	2.700K	7023
	●	3.000K	7024

Accessories



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | UGR <19 | CRI ≥90 | Nano base | Side / front base | 36° | +40°C -20°C | 1/24

New

Ark space



Black-gray



Black-transp.



White-transp.



Technical Information

Power	6W
V / I in	25-42vdc / 500mA
Installation	Surface / Recessed
Color Temperature	2.700K / 3.000K
Lumens	350 lm / 360 lm
Material	Aluminium and acrylic
Finishes	White-transparent / Black-transparent / Black-gray

Code			
7001		White-transp.	2.700K
7002		White-transp.	3.000K
7003		Black-transp.	2.700K
7004		Black-transp.	3.000K
7005		Black-gray	2.700K
7006		Black-gray	3.000K

Accessories



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EMC

3 YEARS WARRANTY | 26.000 HOURS | | IP 20 | UGR <19 | CRI ≥90 | Nano base | Side / front base | 90° | +40°C -20°C | 1/12

SUSPENSION



Nano Alp space



Alp space



*Base not included. You need to choose a base to complete the instalation.

Technical Information

Power	5W	5W
V / I in	20-42vdc / 120mA	20-42vdc / 120mA
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	370 lm	370 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	○ 5096	○ 5098
	● 5097	● 5099
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Nano surface base
Ø75x33mm
○ 5114
● 5115



Nano recessed base
Ø90x22mm / Ø80mm
○ 5116
● 5117



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EAC

*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | Nano base | Side/front base | 45° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/60



Bora space



Bora XL space



*Base not included.
You need to choose a base to complete the instalation.

Technical Information

	Bora space	Bora XL space
Power	8W	15W
V / I in	20-55vdc / 150mA	20-42vdc / 350mA
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	○ 5084	○ 5086
	● 5085	● 5087
	ⓘ Custom RAL	ⓘ Custom RAL
	1/30	1/20

ⓘ Consult delivery terms and conditions.

Accessories



Surface Base
Ø75x33mm
○ 5118 (8W)
● 5119 (8W)
○ 5122 (15W)
● 5123 (15W)



Recessed Base
Ø90x22mm / Ø80mm
○ 5120 (8W)
● 5121 (8W)
○ 5124 (15W)
● 5125 (15W)



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EMC

*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | Nano base | Side/front base | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH



Lievo space





Lievo XL space





*Base not included.
You need to choose a base to complete the instalation.

Technical Information

Power	8W	15W
V / I in	20-55vdc / 150mA	20-42vdc / 350mA
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	○ 5088	○ 5090
	● 5089	● 5091
	ⓘ Custom RAL	ⓘ Custom RAL
	1/30	1/12

ⓘ Consult delivery terms and conditions.

Accessories



Surface Base
Ø75x33mm
○ 5118 (8W)
● 5119 (8W)
○ 5122 (15W)
● 5123 (15W)



Recessed Base
Ø90x22mm / Ø80mm
○ 5120 (8W)
● 5121 (8W)
○ 5124 (15W)
● 5125 (15W)



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EMC

*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | Nano base | Side/front base | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH



Laguarda Ramos Dental Studio. Las Palmas de Gran Canaria (Spain). Architecture: Room C Studio. Photography: Miriam Ruano Carreño.

Zoe space





Zoe XL space





*Base not included.
You need to choose a base to complete the instalation.

Technical Information

Power	8W	15W
V / I in	20-55vdc / 150mA	20-42vdc / 350mA
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	△ 5092	△ 5094
	▲ 5093	▲ 5095
	ⓘ Custom RAL	ⓘ Custom RAL
	1/30	1/12

ⓘ Consult delivery terms and conditions.

Accessories



Surface Base
Ø75x33mm
○ 5118 (8W)
● 5119 (8W)
○ 5122 (15W)
● 5123 (15W)



Recessed Base
Ø90x22mm / Ø80mm
○ 5120 (8W)
● 5121 (8W)
○ 5124 (15W)
● 5125 (15W)



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EMC

*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | Nano base | Side/front base | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH



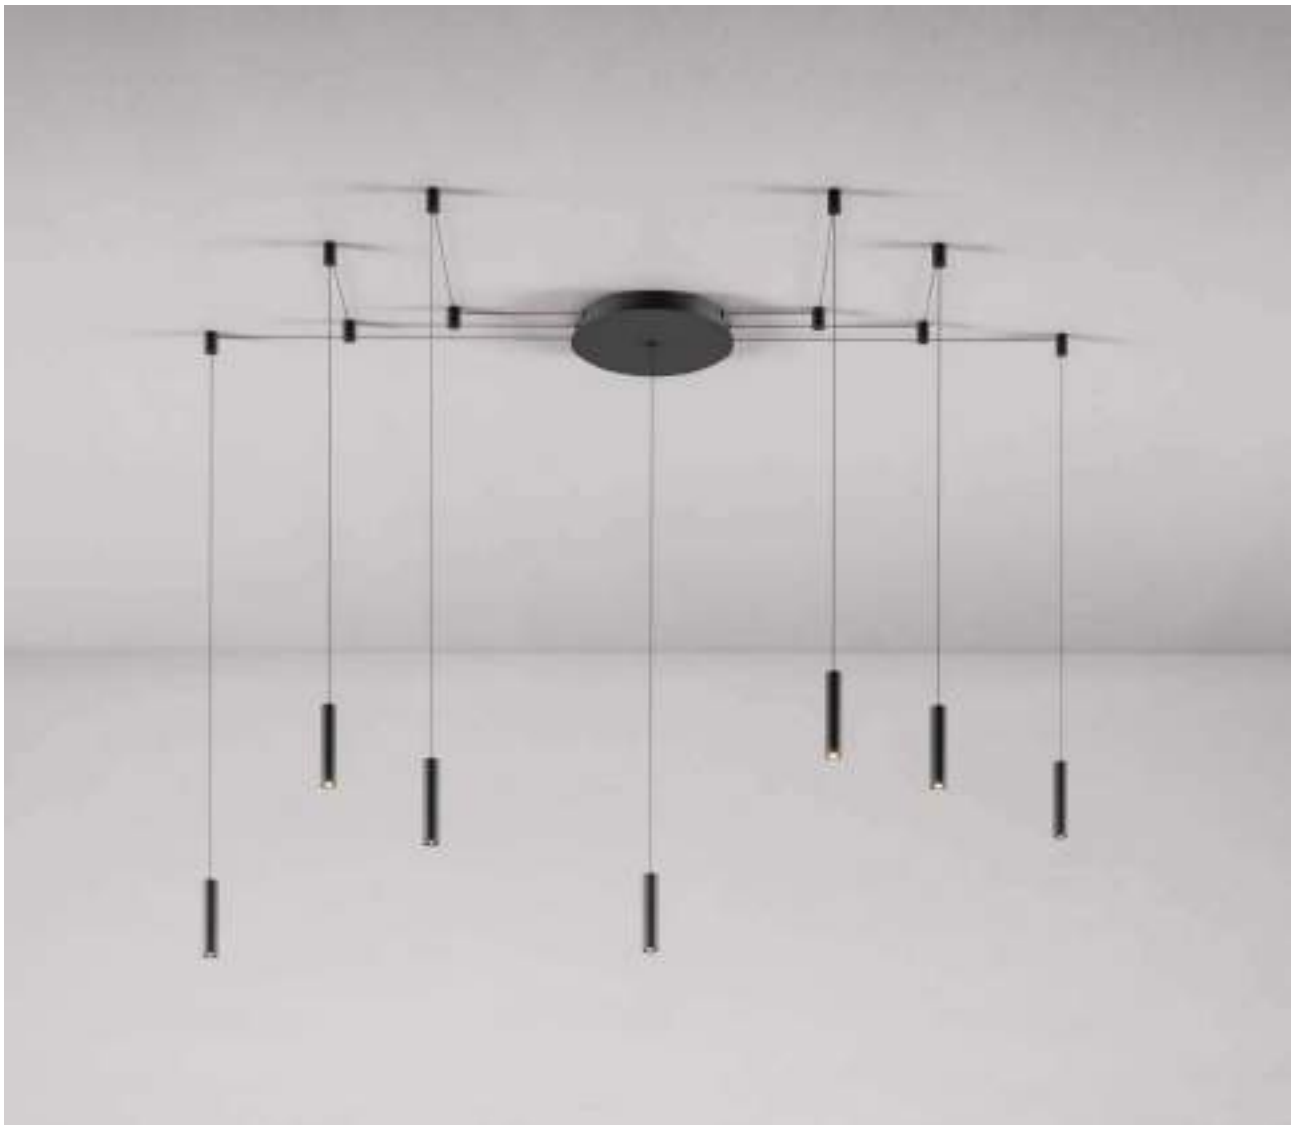

Side base

Base Ø250x41mm



Code	
Code	S1

Product	
Bora	1
Zoe	3
Lievo	5
Alp / Atmos	7
Nano Alp	8

Units	
2 units	2
3 units	3
4 units	4
5 units	5
6 units	6

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
ⓘ Custom RAL	

Code: S1

Base Ø280x41mm



Code	
Code	S2

Product	
Bora	1
Zoe	3
Lievo	5
Alp / Atmos	7
Nano Alp	8

Units	
2 units	2
3 units	3
4 units	4
5 units	5
6 units	6

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
ⓘ Custom RAL	

Code: S2

Base Ø330x41mm



Code	
Code	S3

Product	
Bora	1
Bora XL / Sphere	2
Zoe	3
Zoe XL / Hat	4
Lievo	5
Lievo XL / Mini Hat	6
Alp / Atmos	7
Nano Alp	8
Ark / Cookie	9

Units	
2 units	2
3 units	3
4 units	4
5 units	5
6 units	6
7 units	7
8 units	8

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
ⓘ Custom RAL	

Code: S3

ⓘ Consult delivery terms and conditions.

Accessories



Holder space
○ 5106
● 5107



Wire space (1m). Max. length 6m
○ 5128
● 5129

CE RoHS

*Create your code acording to your preferences. For other finishing please consult.

3 YEARS WARRANTY | IP 20 | 220/240 VAC | PF >0,9 | 50/60 Hz | TRIAC DIMM | DALI 2





Space - Front base

Front base

Base Ø250x41mm



Code	
Code	F1

Product	
Bora	1
Zoe	3
Lievo	5
Alp / Atmos	7
Nano Alp	8

Units	
2 units	2
3 units	3
4 units	4
5 units	5
6 units	6

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
ⓘ Custom RAL	

Code: F1

Base Ø280x41mm



Code	
Code	F2

Product	
Bora	1
Zoe	3
Lievo	5
Alp / Atmos	7
Nano Alp	8

Units	
2 units	2
3 units	3
4 units	4
5 units	5
6 units	6

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
ⓘ Custom RAL	

Code: F2

Base Ø330x41mm



Code	
Code	F3

Product	
Bora	1
Zoe	3
Lievo	5
Alp / Atmos	7
Nano Alp	8

Units	
2 units	2
3 units	3
4 units	4
5 units	5
6 units	6
7 units	7
8 units	8

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
ⓘ Custom RAL	

Code: F3

Base Ø330x41mm



Code	
Code	F3

Product	
Bora XL / Sphere	2
Zoe XL / Hat	4
Lievo XL / Mini Hat	6
Ark / Cookie	9

Units	
2 units	2
3 units	3

Driver	
On / Off	1
Dali	2
Triac	3
Casambi	5

Color	
○ White	1
● Black	2
ⓘ Custom RAL	

Code: F3

ⓘ Consult delivery terms and conditions.

Accessories



Holder space
○ 5106
● 5107



Wire space (1m). Max. length 6m
○ 5128
● 5129

CE RoHS

*Create your code acording to your preferences. For other finishing please consult.

3 YEARS WARRANTY | IP 20 | 220/240 VAC | PF >0,9 | 50/60 Hz | TRIAC DIMM | DALI 2



Ark suspension surface



Black-gray



Ark suspension recessed



White-transp.





Black-transp.

Technical Information

Power	6W	6W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	350 lm / 360 lm	350 lm / 360 lm
Material	Aluminium and acrylic	Aluminium and acrylic
Finishes	White-transparent / Black-transparent / Black-gray	White-transparent / Black-transparent / Black-gray

Code		
4814	White-transp. 2.700K	4808 White-transp. 2.700K
4815	White-transp. 3.000K	4809 White-transp. 3.000K
4816	Black-transp. 2.700K	4810 Black-transp. 2.700K
4817	Black-transp. 3.000K	4811 Black-transp. 3.000K
4818	Black-gray 2.700K	4812 Black-gray 2.700K
4819	Black-gray 3.000K	4813 Black-gray 3.000K

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 90° | 50/60 Hz | +40°C -20°C | 1/12



Atmos slim suspension





Atmos slim XL suspension



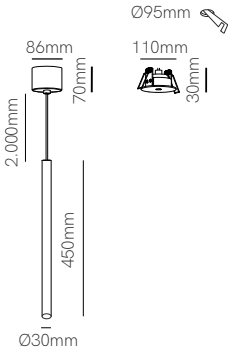

*Need Tuya Smart App to work.

Technical Information

	Atmos slim suspension	Atmos slim XL suspension
Power	6W	6W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Tuya 2.700K - 4.000K	Tuya 2.700K - 4.000K
Lumens	460 lm	460 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome

Code		
	○ 4930	○ 4750
	● 4931	● 4751
	○ 4932	○ 4752
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Gateway Wifi
☐ 4956

CE RoHS

*See page 324 for Gateway additional info.
*All versions included surface base (mounted) and recessed base (not mounted).

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 45° | 50/60 Hz | +50°C -10°C | IK03 | tuya | 1/10



Atmos suspension





Atmos XL suspension



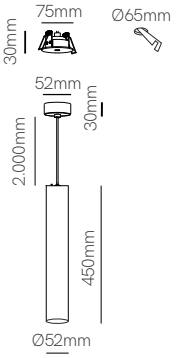

Technical Information

	Atmos suspension	Atmos XL suspension
Power	7W	10W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	770 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Code	○ 4461-N	○ 4463-N
	● 4462-N	● 4464-N
	○ 4952-N	○ 4953-N
	ⓘ Custom RAL	ⓘ Custom RAL
	1/8	1/4

ⓘ Consult delivery terms and conditions.

Accessories

Included with:
4461 / 4463



Included with:
4461 / 4462 / 4463 / 4464

CE RoHS

*All versions included surface base (mounted) and recessed base (not mounted).

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH



Atmos GU10 suspension



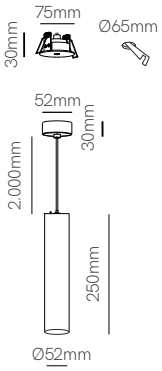

Atmos GU10 XL suspension



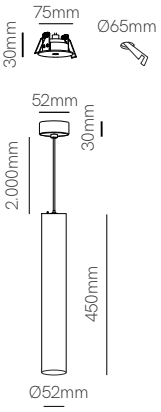

*All versions included surface base (mounted) and recessed base (not mounted).

Technical Information

	Atmos GU10 suspension	Atmos GU10 XL suspension
Installation	Surface / Recessed	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)

Code		
	○ 4465	○ 4467
	● 4466	● 4468
	◌ 4954	◌ 4955
	ⓘ Custom RAL	ⓘ Custom RAL
	1/8	1/4

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 220/240 VAC |



Zoe suspension surface





Zoe suspension recessed





Technical Information

Power	7W	7W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	360 lm / 370 lm	360 lm / 370 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code						
	△	2.700K	4803	△	2.700K	4799
	△	3.000K	4804	△	3.000K	4800
	▲	2.700K	4805	▲	2.700K	4801
	▲	3.000K	4806	▲	3.000K	4802

CE RoHS EAC

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 38° | 50/60 Hz | +40°C -20°C | 1/36



Mini Hat suspension surface



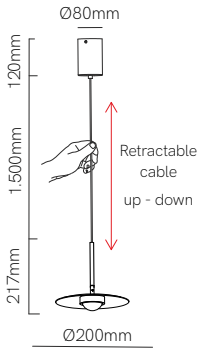

Mini Hat suspension recessed



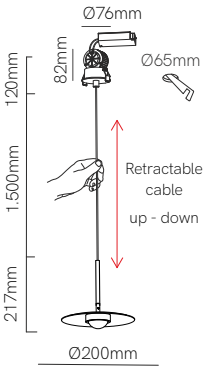

Hat suspension surface



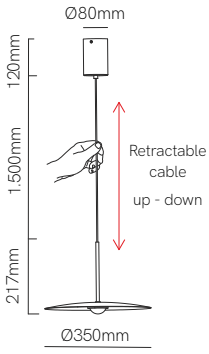

Hat suspension recessed



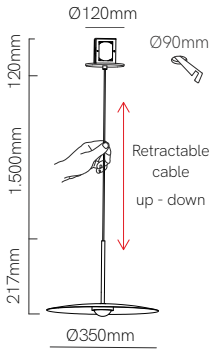

Mini Hat

Hat

Technical Information

	Mini Hat suspension surface	Mini Hat suspension recessed	Hat suspension surface	Hat suspension recessed
Power	8W	8W	8W	8W
Installation	Surface	Recessed	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	800lm	800lm	835 lm	835 lm
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black	White / Black

Code												
	○	2.700K	5710	○	2.700K	5706	○	2.700K	5345	○	2.700K	5351
	○	3.000K	5712	○	3.000K	5708	○	3.000K	5346	○	3.000K	5352
	●	2.700K	5711	●	2.700K	5707	●	2.700K	5348	●	2.700K	5354
	●	3.000K	5713	●	3.000K	5709	●	3.000K	5349	●	3.000K	5355
	70°		1/10	70°		1/10	83°		1/5	83°		1/5

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,6 | CRI ≥90 | 50/60 Hz | +40°C -20°C



Bora suspension surface





Bora suspension recessed





Technical Information

	Bora suspension surface	Bora suspension recessed
Power	8,5W	8,5W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	530 lm / 540 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code						
	○	2.700K	4605	○	2.700K	4613
	○	3.000K	4606	○	3.000K	4614
	●	2.700K	4607	●	2.700K	4615
	●	3.000K	4608	●	3.000K	4616
	●	2.700K	4609	●	2.700K	4617
	●	3.000K	4610	●	3.000K	4618
	●	2.700K	4611	●	2.700K	4619
	●	3.000K	4612	●	3.000K	4620

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <15 | PF >0,6 | CRI ≥93 | 36° | 50/60 Hz | +40°C -20°C | 1/18



Cookie suspension base



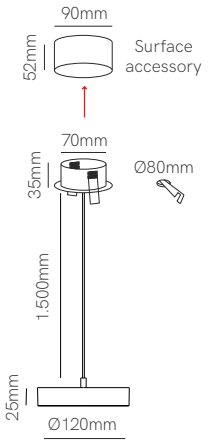

*Includes surface and recessed base.

Technical Information

Power	12W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black

Code	○ 5183
	● 5184
	ⓘ Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 38° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/20



Institut Ferrés Amat, Barcelona (Spain). Lighting project: Vé il·luminació. Architecture: Pablo Amorós.

Tot suspension / surface



Tot XL suspension / surface





Surface



Suspension



Suspension



Surface

*Need Tuya Smart App to work.

Technical Information

Power	40W	60W
Installation	Surface / Pendant	Surface / Pendant
Color Temperature	Tuya 2.600K - 4.000K	Tuya 2.600K - 4.000K
Lumens	3.400 lm	5.900 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black	White / Black
Code	● 4903	● 4905
	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Gateway Wifi

☐ 4956

CE RoHS

*See page 324 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | +50°C -20°C | tuya | 1



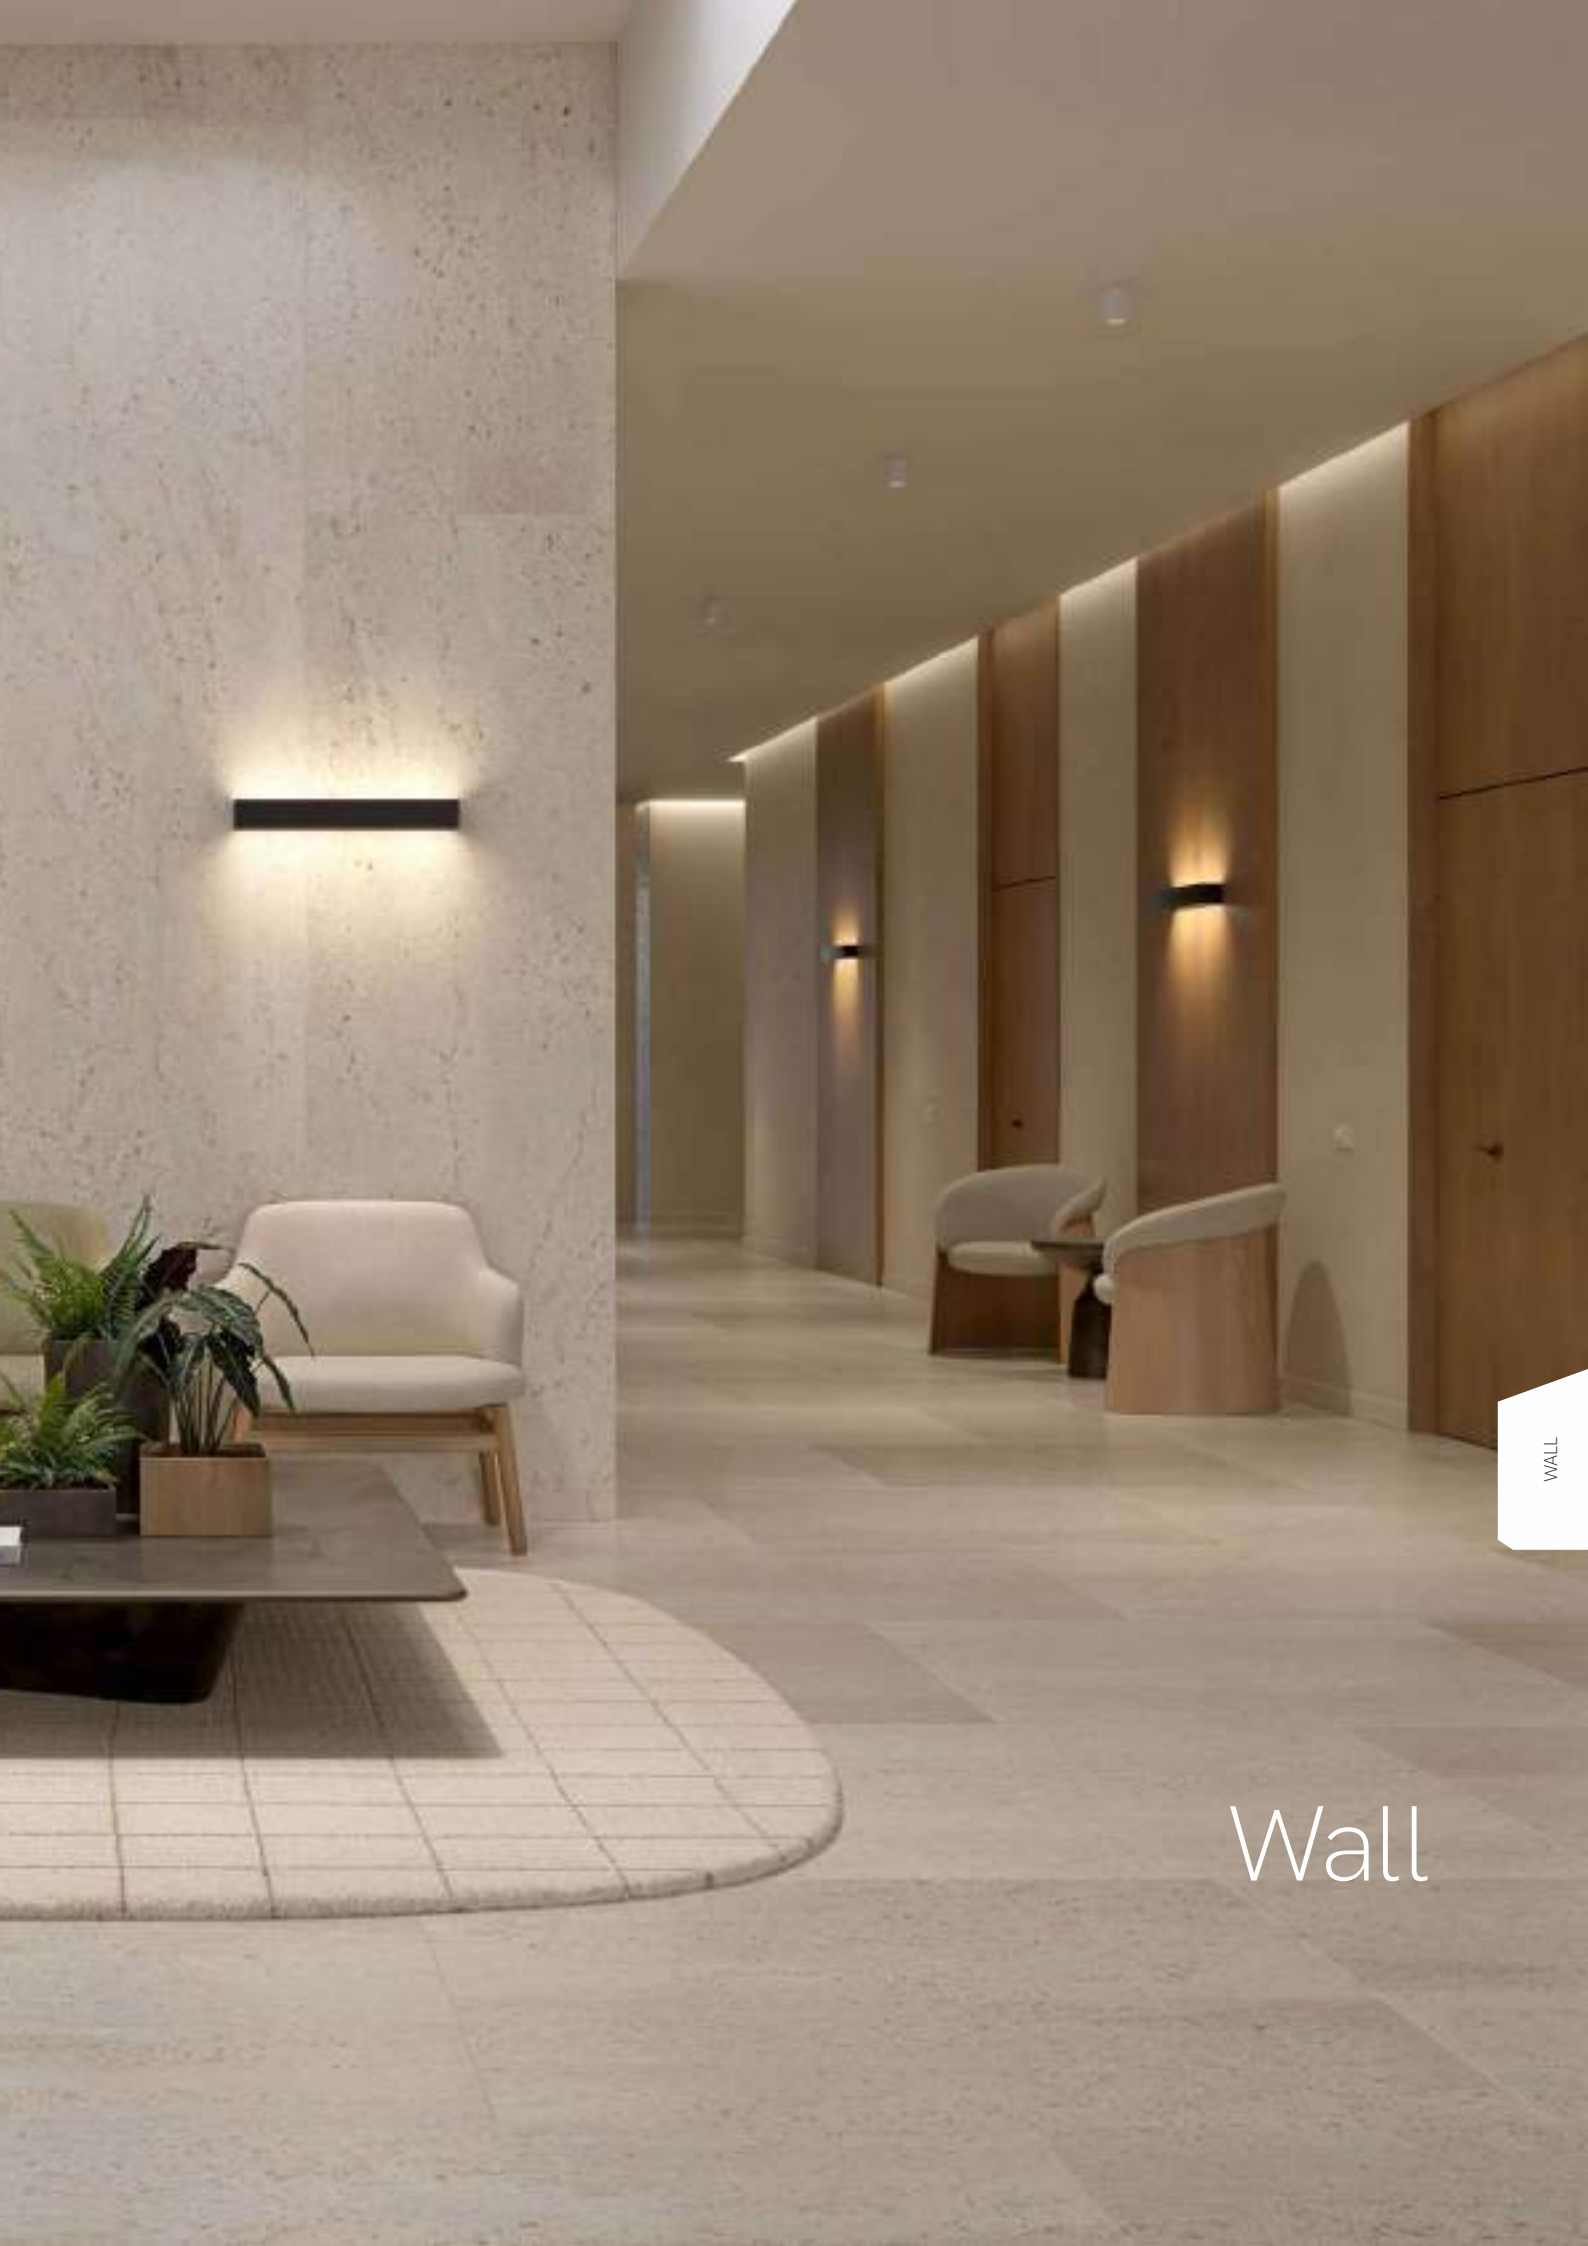

Wall


▶ VIDEO

Lao







Recessed box included
66mm x Ø73mm



White and black cover included

*Recessed box, white and black cover included.

Technical Information

Power	1,5W
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	20 lm
Material	Aluminium
Finishes	White / Black

Code	5027
	Custom RAL

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 175/265 VAC | PF >0,4 | CRI ≥80 | 38° | 50/60 Hz | +45°C -20°C | 6 - 8m | ON OFF | OFF 30 sec | CCT SWITCH | 1/50



Ilo







Skin







*Recessed box included.

Technical Information

	Ilo	Skin
Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	3.000K	3.000K
Lumens	60 lm	60 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	○ 4126	□ 4108
	● 4127	■ 4109
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥80 | 120° | 50/60 Hz | IK07 | +50°C -20°C | 1/50

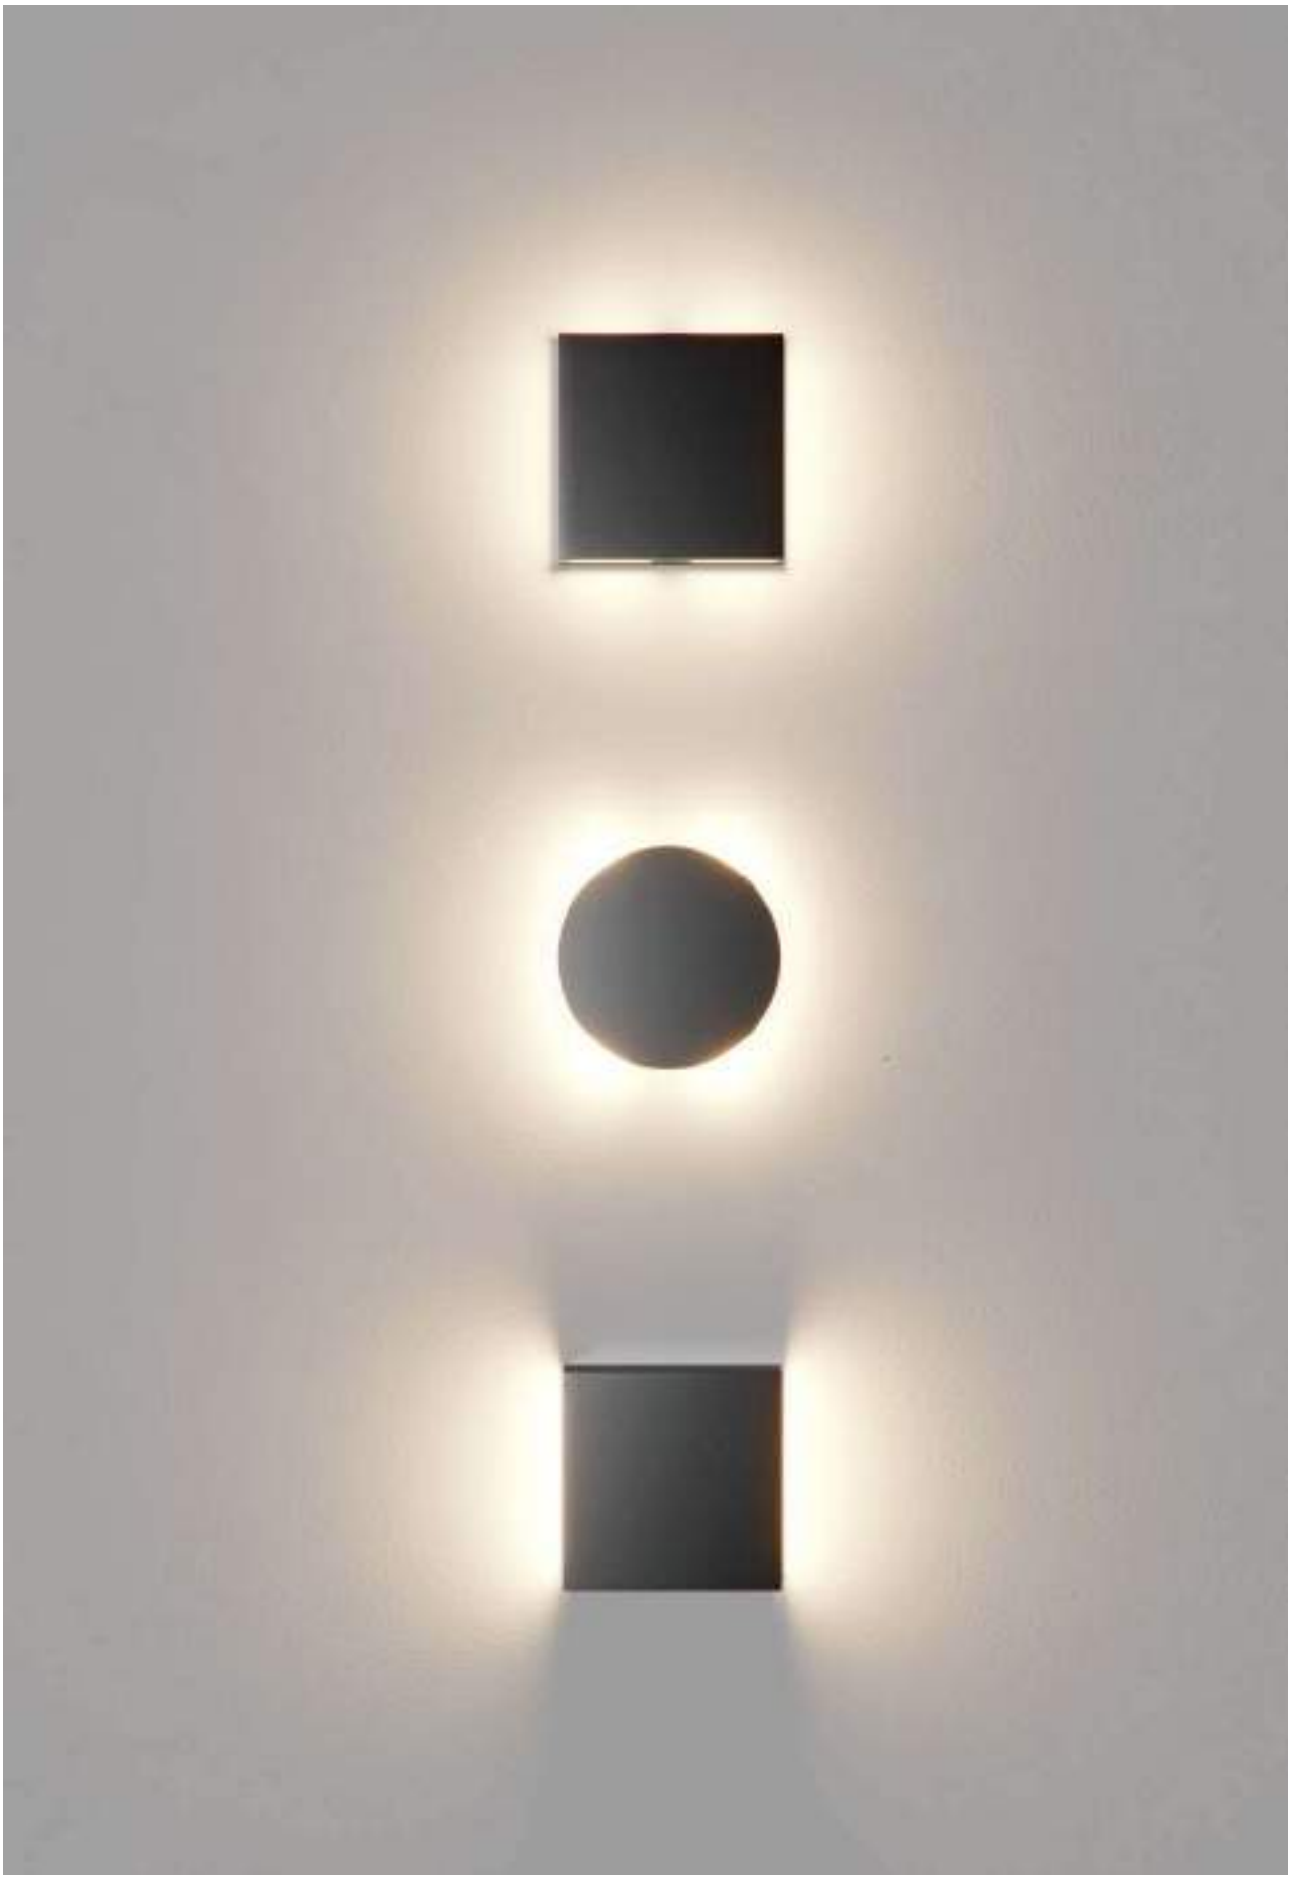

Port







Grow







Steps







*Recessed box included.

Technical Information

	Port	Grow	Steps
Power	4W	4W	4W
Installation	Recessed	Recessed	Recessed
Color Temperature	3.000K	3.000K	3.000K
Lumens	60 lm	60 lm	60 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Code	☐ 4112	○ 4106	☐ 4110
	■ 4113	● 4107	■ 4111
	ⓘ Custom RAL	ⓘ Custom RAL	ⓘ Custom RAL
	120° ☐	120° ○	120° ☐

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥80 | 50/60 Hz | IK07 | +50°C -20°C | 1/50

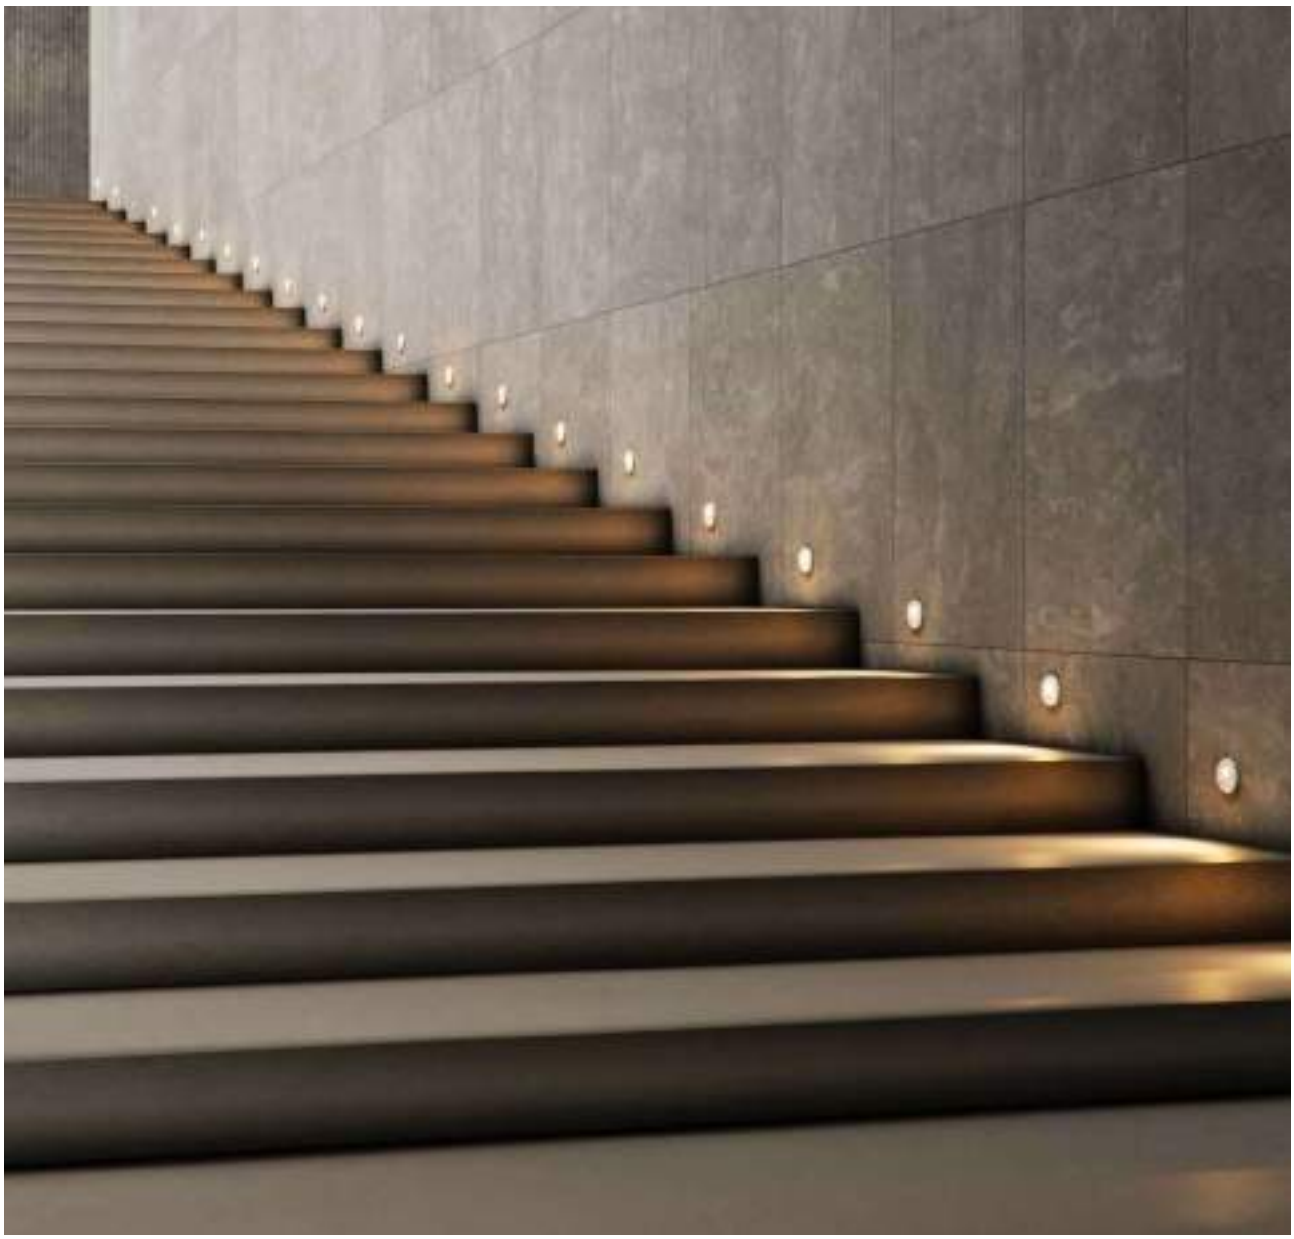



Pun









Recessed box included
66mm x Ø73mm



White and black cover included

Technical Information

Power	3W
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	65 lm
Material	Aluminium
Finishes	White / Black

Code	○ ● 5029
ⓘ	Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 85/265 VAC | PF >0,4 | CRI ≥80 | 38° | 50/60 Hz | IK07 | +45°C -20°C | CCT SWITCH | 1/50



Pure wall





*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

Technical Information

Power	4W
Installation	Surface
Color Temperature	2.700K
Lumens	155 lm / 80 lm / 40 lm
Material	Aluminium
Finishes	White / Black

Code	
	☐ 5159
	■ 5160

CE RoHS

*Charger by USB.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | USB-C 5V 2A | CRI ≥90 | 30° | 50/60 Hz | 3 INTENSITIES | +40°C -20°C | 1/20



Sweet wall





*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

Technical Information

Power	4W
Installation	Surface
Color Temperature	2.700K
Lumens	150 lm / 90 lm / 40 lm
Material	Aluminium
Finishes	White / Black

Code	
	☐ 5155
	■ 5156

CE RoHS

*Charger by induction and USB.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,4 | USB-C 5V 2A | CRI ≥90 | 20° | 5W | 50/60 Hz | 3 INTENSITIES | +40°C -20°C | 1/10



Beam wall







*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

Technical Information

Power	5W
Installation	Surface
Color Temperature	2.700K
Lumens	380 lm / 190 lm / 95 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 5157
	■ 5158

CE RoHS

*Charger by USB-C.

5 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥90 | 40° | 50/60 Hz | USB-C 5V 2A | 3 INTENSITIES | +40°C -20°C | 1/12



Mini Icon wall





Icon wall





Technical Information

Power	7W	12W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	770 lm	1.320 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code		
	☐ 4383	☐ 4386
	■ 4384	■ 4387
	■ 4385	■ 4388
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,5 | CRI ≥90 | 120° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/12



Tron





Technical Information

Power	5W / 8W / 16W / 24W
Installation	Surface
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	300 lm - 2.400 lm
Material	Aluminium
Finishes	White / Black

Code		Diffuser		Size (X)		CCT (Lm/W) - Power/m		Driver		Colour	
Code	9	Opal	7	Nano tron 140mm	0	2.700K (60 lm/W) - 29W/m	2	Triac	4	White (9003)	1
				Mini tron 290mm	1	3.000K (65 lm/W) - 29W/m	3			Black (9005)	2
				Tron 590mm	2	4.000K (70 lm/W) - 29W/m	4			Custom RAL	C
				Tron XL 870mm	3						

Code: 9 7 4

CE RoHS EMC

Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 0,87m Max | TRIAC DIMM







Sphere alp wall

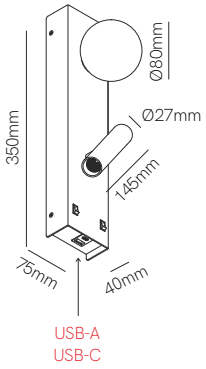

*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

Technical Information

Power	20W
Installation	Surface
Color Temperature	2.700K / 3.000K
Lumens	680 lm
Material	Aluminium and glass
Finishes	White / Black

Code			
	○	2.700K	5339
	○	3.000K	5340
	●	2.700K	5342
	●	3.000K	5343

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | UGR <19 | CRI ≥90 | 360° | 36° | 50/60 Hz | +40°C -20°C | 1/6



One GU10 wall





One GU10 wall dual





*GU10 Bulbholder included, LED lamp not included.

Technical Information

	One GU10 wall	One GU10 wall dual
Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)

Code	One GU10 wall	One GU10 wall dual
	○ 5006	○ 5009
	● 5007	● 5010
	● 5008	● 5011
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | DUAL | IP 20 | 1/20



Zio GU10 wall





Zio GU10 wall dual





*GU10 Bulbholder included, LED lamp not included.

Technical Information

Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Bulbholder	50mm GU10 (except Power bulb)	50mm GU10 (except Power bulb)

Code		
	☐ 5012	☐ 5015
	■ 5013	■ 5016
	■ 5014	■ 5017
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | DUAL | IP 20 | 1/20





Portable & table



New

Asti





Technical Information

Power	2W
Installation	Portable
Color Temperature	2.200K
Lumens	130 lm
Material	Aluminium and glass
Finishes	Brushed Gold

Code	5733

CE RoHS

3 YEARS WARRANTY | 1 YEARS WARRANTY | 30.000 HOURS | 4 HOURS | 6 HOURS | USB-C 5V | 3.000 mAh | IP 54 | CRI ≥90 | 180° | DIMMABLE | +50°C -20°C | 1/12


▶ VIDEO

Bag





Technical Information

Power	2W
Installation	Portable
Color Temperature	3.000K
Lumens	50 lm
Material	Aluminium
Finishes	White / Black / Brushed Gold / Champagne

Code	
	5329
	5330
	5331
	5332

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | 2,5 HOURS | 3,5 HOURS | USB-C 5V | 1.800 mAh | IP 20 | CRI ≥90 | 180° | DIMMABLE | IK06 | +40°C -20°C | 1/20


▶ VIDEO

Bimba





Technical Information

Power	2W
Installation	Portable
Color Temperature	Switch 2.000K / 3.100K / 5.000K
Lumens	118 lm
Material	Aluminium
Finishes	White / Black / Brushed Gold / Champagne

Code	
	5325
	5326
	5327
	5328

CE RoHS

3 YEARS WARRANTY | 1 YEARS WARRANTY | 9.000 HOURS | 3,5 HOURS | 5 HOURS | USB-C 5V | 3.000 mAh | IP 65 | CRI ≥80 | 110° | DIMMABLE | IK04 | +40°C -20°C | CCT SWITCH | 1/8




BENEITO FAURE
▶ VIDEO

Converse





Technical Information

Power	2,5W
Installation	Portable
Color Temperature	2.700K / 5.000K
Lumens	225 lm
Finishes	White

Code	○ 3916-N

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 50.000 HOURS | 5-6 HOURS | 4-150 HOURS | MICRO USB 5V | 2.200 mAh | IP 20 | CRI ≥82 | 360° | DIMMABLE | +40°C -20°C | 1/15


▶ VIDEO





Madi



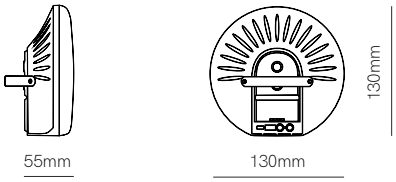

Technical Information

Power	4W
Installation	Portable
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm
Material	Polycarbonate and ABS
Finishes	White

Code	○ 5154

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | POWER BANK | 3-4 HOURS | 100% 6-7H 50% 12-15H SOS 16-18H | USB-C 5V 2A | 5.200 mAh | IP 54 | CRI ≥80 | 200° | DIMMABLE | IK08 | +40°C -10°C | CCT SWITCH | 1/20



Visor





Technical Information

Power	5W
Installation	Portable
Color Temperature	3.000K
Lumens	460 lm / 230 lm / 46 lm
Material	Aluminium
Finishes	White / Corten

Code	
	3929
	3931

CE RoHS

*Charger by USB. Charger included.

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | POWER BANK | 6,5 HOURS | 5/11/25 HOURS 7.800 mAh | 3,7V USB | IP 65 | CRI ≥80 | 120° | IK05 | 3 INTENSITIES | +45°C -20°C | 1/4


▶ VIDEO

Stem



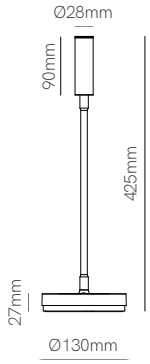

Technical Information

Power	5W
Installation	Table
Color Temperature	2.700K
Lumens	175 lm
Material	Aluminium and polycarbonate
Finishes	White / Black

Code	
	○ 4979
	● 4981

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,45 | CRI ≥90 | 30° | 5W INDUCTION CHARGING | 50/60 Hz | IK06 | +50°C -20°C | 1/20



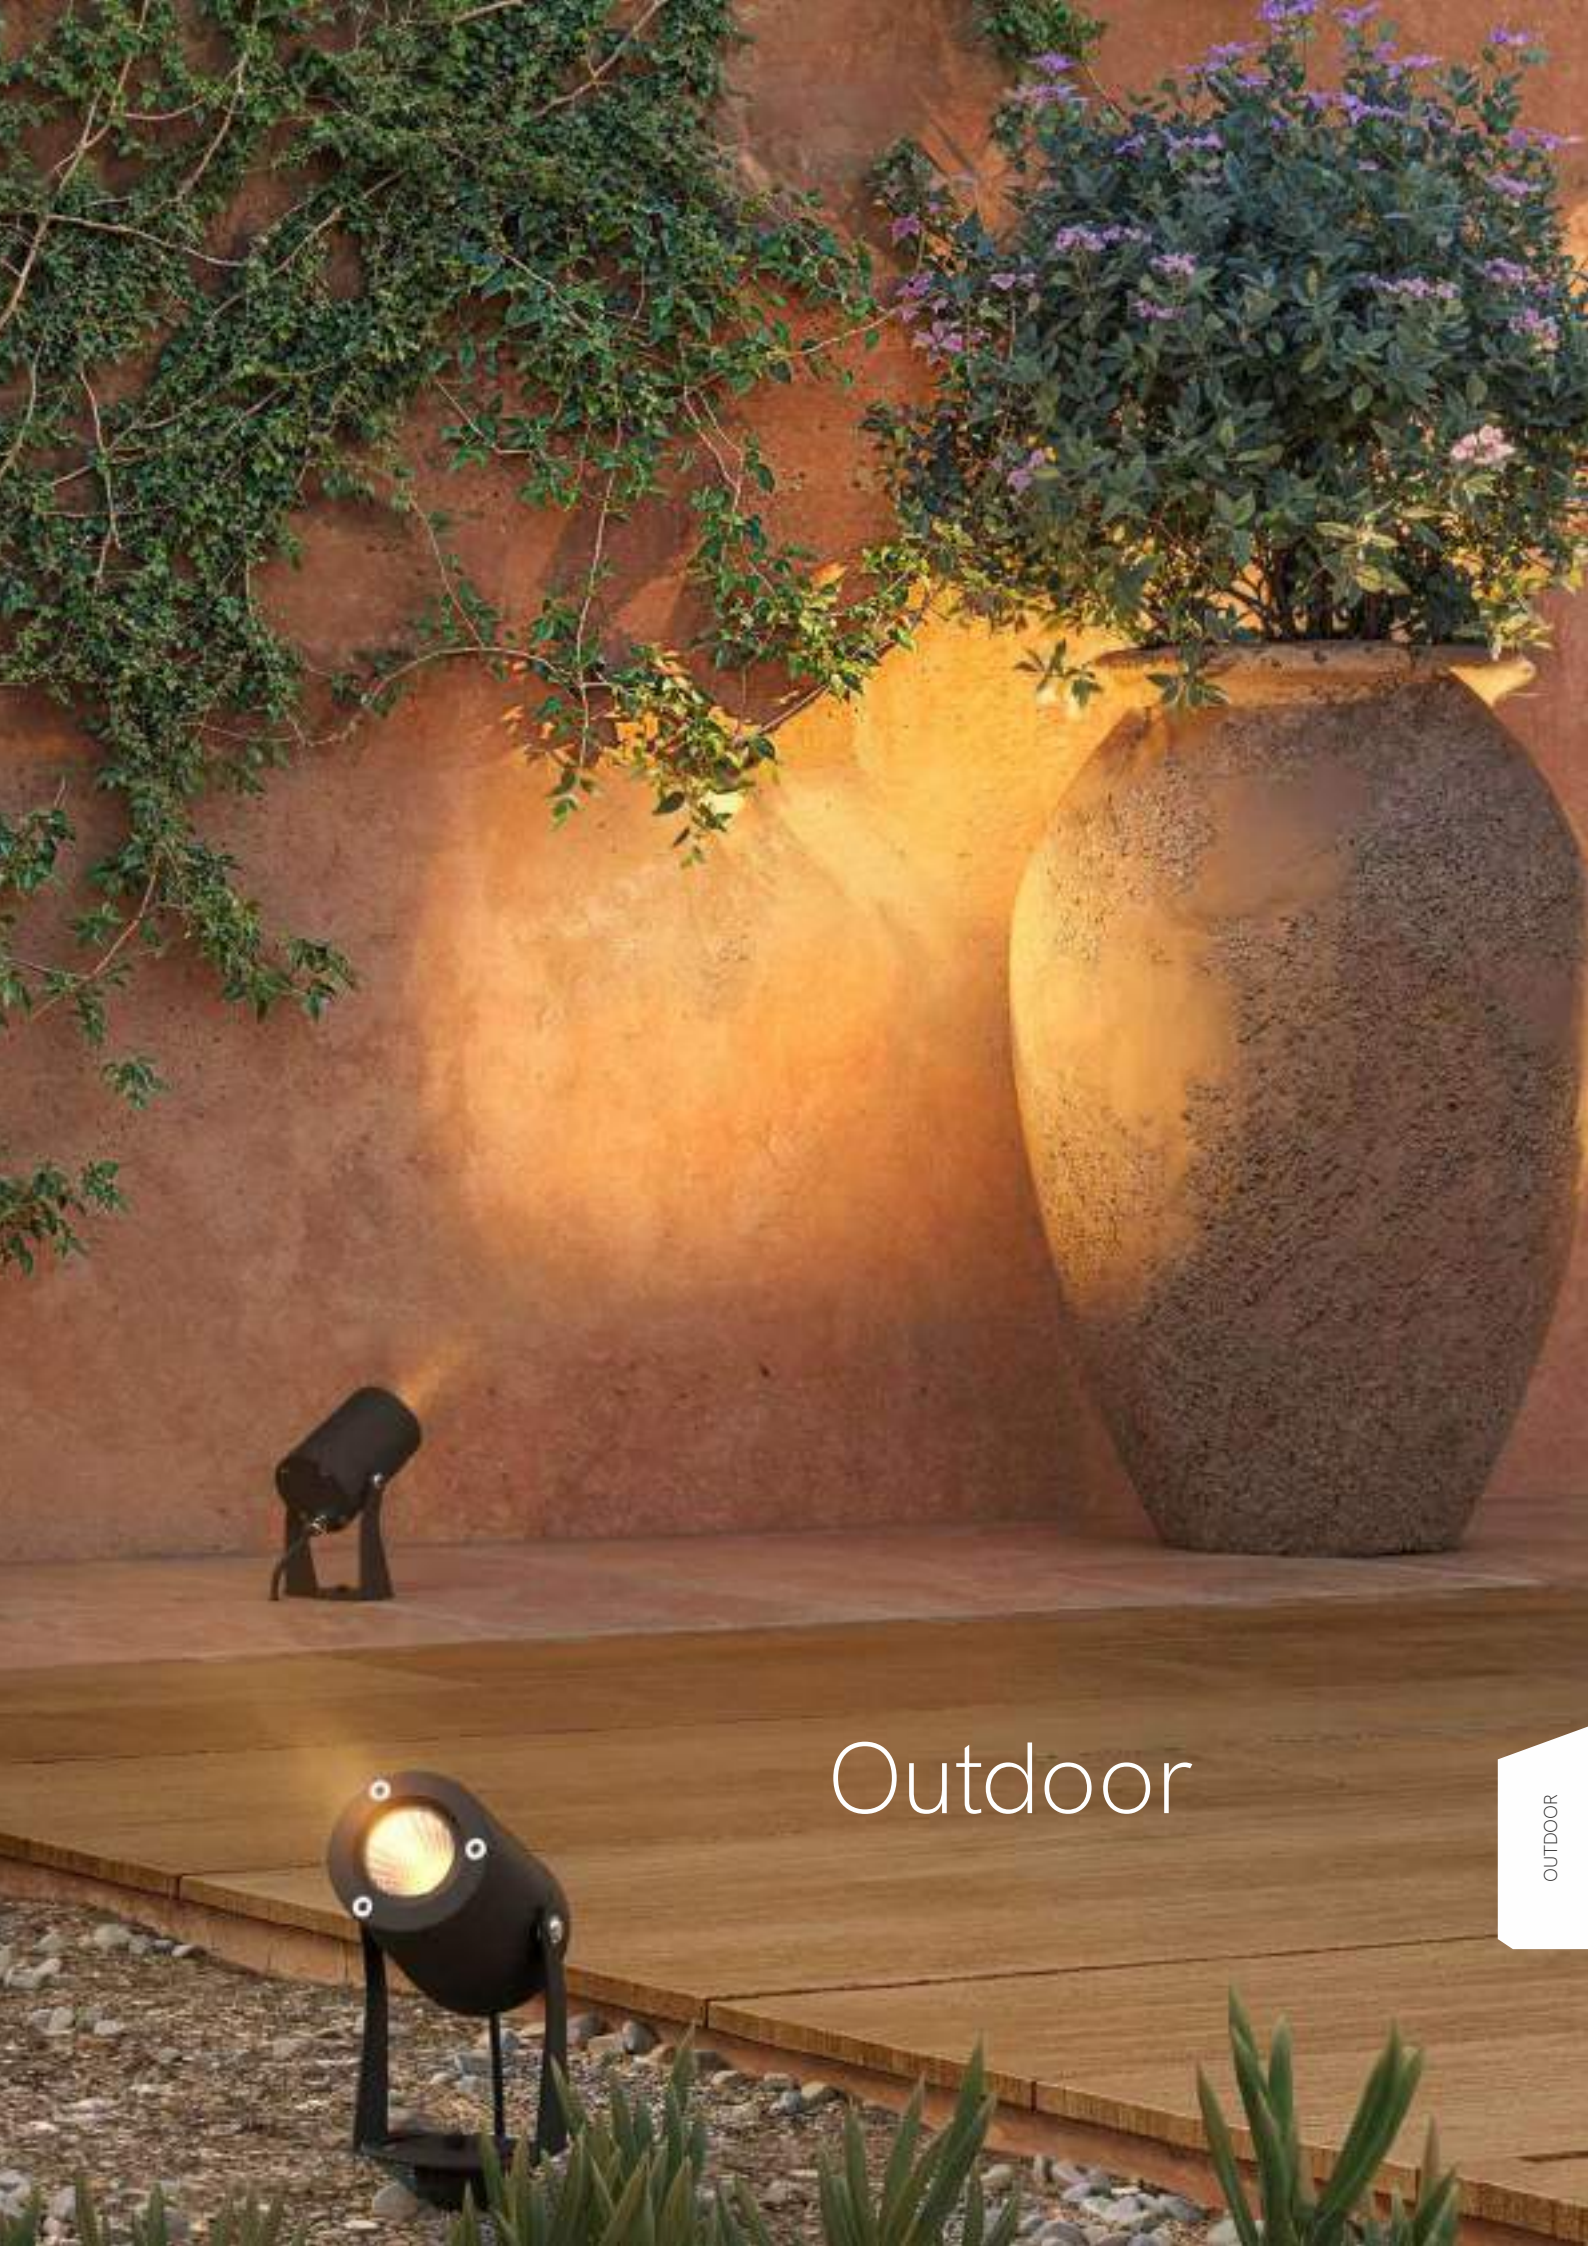

Outdoor





Polo



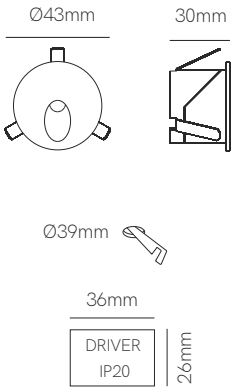

Luky



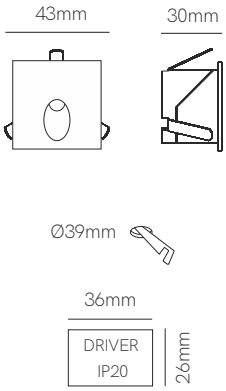

Polo Luky

Technical Information

	Polo	Luky
Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	3.200K / 4.000K	3.200K / 4.000K
Lumens	90 lm / 96 lm	90 lm / 96 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code			Polo		Luky
	○	3.200K	3995	□ 3.200K	3999
	○	4.000K	3996	□ 4.000K	4000
	●	3.200K	3997	■ 3.200K	4001
	●	4.000K	3998	■ 4.000K	4002
		Custom RAL		Custom RAL	

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

Consult delivery terms and conditions.

3 YEARS WARRANTY | 50.000 HOURS | OUTDOOR COVERED | IP 54 | 220/240 VAC | PF >0,5 | CRI ≥80 | 65° | 50/60 Hz | +50°C -20°C | AKZO NOBEL | 1/200

OUTDOOR





Ina







Dis







Nix







Technical Information

Power	2W	2W	2W
Installation	Recessed	Recessed	Recessed
Color Temperature	3.000K	3.000K	3.000K
Lumens	55 lm	55 lm	55 lm
Material	Inox 304	Inox 304	Inox 304
Finishes	Brushed Inox	Brushed Inox	Brushed Inox
Code	4367	4368	4369
	1.000Kg	1.000Kg	1.000Kg

Accessories



Linear Joint IP68
Ø26x95mm
5671



T Joint IP68
74x118mm
5672



X Joint IP68
122x122mm
5673

CE RoHS

*Recessed box included. Integrated driver.

3 YEARS WARRANTY | 50.000 HOURS | IP 67 | 100/240 VAC | PF >0,4 | CRI ≥80 | CABLE 50CM | 50/60 Hz | IK09 | +50°C -20°C | 1/50

OUTDOOR



Casa Patio, Gran Canaria (Spain). Architecture: Room C Studio. Building contractor: Marcelasa SL. Photography: David Rodríguez.

Mis r wall





Mis sq wall





Technical Information

	Mis r wall	Mis sq wall
Power	3W	3W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	200 lm	140 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code	Mis r wall	Mis sq wall
	○ 5020	□ 5023
	● 5021	■ 5024
	● 5022	■ 5025
	ⓘ Custom RAL	ⓘ Custom RAL

CE RoHS

*Integrated driver.
ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,5 | CRI ≥80 | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/10/50

OUTDOOR



Artis r wall





Recessed box included
67mm x Ø74mm



Surface box included
54mm x Ø80mm

Artis sq wall





Recessed box included
107mm x 73mm x 53mm



Surface box included
103mm x 79mm x 57 mm

Technical Information

	Artis r wall	Artis sq wall
Power	4,5W	4,5W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	130 lm	130 lm
Material	Aluminium and glass	Aluminium and glass
Finishes	White	White
Code	○ 5205	□ 5028

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 66 | 175/265 VAC | PF >0,5 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +50°C -20°C | CCT SWITCH | 1/20

OUTDOOR




▶ VIDEO

Tween recessed



Tween surface



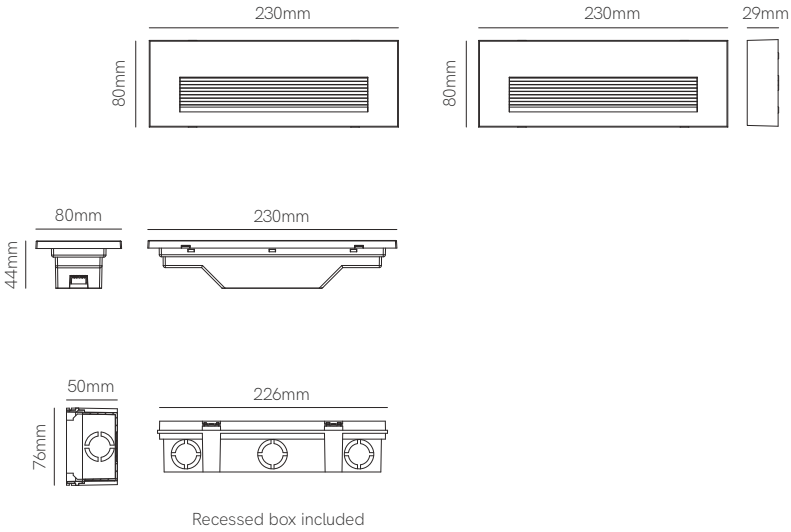

Recessed box included

Technical Information

	Tween recessed	Tween surface
Power	5W	5W
Installation	Recessed	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	360 lm	360 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code		
	☐ 5199	☐ 5196
	■ 5200	■ 5197
	■ 5201	■ 5198

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 110/240 VAC | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/50

OUTDOOR



Lek sensor



Battery powered

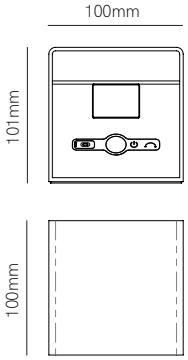

Technical Information

Power	6W
Installation	Surface
Color Temperature	3.000K
Lumens	358 lm
Material	Aluminium
Finishes	White / Black / Corten

Code	
	5666
	5667
	5668

CE RoHS

3 YEARS WARRANTY BATTERY 1 YEAR | 30.000 HOURS | 5 HOURS | 4-24 HOURS | USB-C 5V | 4.400 mAh | OUTDOOR COVERED | IP 54 | CRI ≥80 | 100° | IK05 | DIMMABLE | +45°C +10°C | PIR SENSOR | 1/9

OUTDOOR





Lek r wall





Lek sq wall





Technical Information

	Lek r wall	Lek sq wall
Power	6,8W	6,8W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	480 lm / 530 lm / 542 lm	480 lm / 530 lm / 542 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code					
	○	2.700K	4906	□ 2.700K	4303
	○	3.000K	4907	□ 3.000K	3983
	○	4.000K	4908	□ 4.000K	3984
	●	2.700K	4909	■ 2.700K	4304
	●	3.000K	4910	■ 3.000K	3985
	●	4.000K	4911	■ 4.000K	3986
	●	2.700K	4912	■ 2.700K	4312
	●	3.000K	4913	■ 3.000K	3987
	●	4.000K	4914	■ 4.000K	3988
ⓘ		Custom RAL		ⓘ Custom RAL	

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | OUTDOOR COVERED | IP 54 | 220/240 VAC | PF >0,9 | CRI ≥80 | 0°-120° | 50/60 Hz | IK04 | +40°C -10°C | AKZO NOBEL | 1/12




▶ VIDEO

Sphere wall





Technical Information

Power	9W
Installation	Surface
Color Temperature	2.700K / 3.000K
Lumens	465 lm
Material	Aluminium and glass
Finishes	White / Black

Code			
	○	2.700K	5333
	○	3.000K	5334
	●	2.700K	5336
	●	3.000K	5337

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | OUTDOOR COVERED | IP 54 | 220/240 VAC | PF >0,6 | UGR <19 | CRI ≥90 | 360° | 50/60 Hz | +40°C -20°C | 1/12


▶ VIDEO

Oma





Technical Information

Power	8W
Installation	Surface
Color Temperature	Switch 2.000K / 2.800K / 4.000K
Lumens	○ 600lm / ● 440lm / ● 400lm
Material	Aluminium and methacrylate
Finishes	White / Amber / Turquoise

Code	
	○ 5381
	● 5382
	● 5383

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,8 | CRI ≥70-80 | 110° | 50/60 Hz | IK06 | +50°C -20°C | CCT SWITCH | 1/20

OUTDOOR



Clos wall





Clos wall dual





Technical Information

Power	8W	16W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.000 lm	2.100 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code		
	○ 4876	○ 4879
	● 4877	● 4880
	● 4878	● 4881
	120°	120°

Accessories (page 695)



Clos base mini
- ○ 4882
- ● 4883
- ● 4884



Clos dual base mini
- ○ 4888
- ● 4889
- ● 4890



Clos base
- ○ 4885
- ● 4886
- ● 4887



Clos dual base
- ○ 4891
- ● 4892
- ● 4893

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 175/265 VAC | PF >0,9 | CRI ≥80 | 50/60 Hz | IK08 | +40°C -25°C | CCT SWITCH | 1/20

OUTDOOR



New

Neo





Neo XL





Technical Information

	Neo	Neo XL
Power	9W	18W
Installation	Surface	Surface
Color Temperature	Switch 2.200K / 2.700K / 3.000K	Switch 2.200K / 2.700K / 3.000K
Lumens	700 lm	1.650 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	☐ 5560	☐ 5564
	■ 5561	■ 5565

OUTDOOR COVERED | IP 54 | 1/12

IP 65 | 1/4

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | 100/240 VAC | PF >0,8 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +45°C -25°C | CCT SWITCH | POWER 70%-100%

OUTDOOR



New

Neo sensor





Neo XL sensor





Technical Information

	Neo sensor	Neo XL sensor
Power	9W	18W
Installation	Surface	Surface
Color Temperature	Switch 2.200K / 2.700K / 3.000K	Switch 2.200K / 2.700K / 3.000K
Lumens	700 lm	1.650 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 5562	☐ 5566
	■ 5563	■ 5567
	1/12	POWER 70%-100% | 1/4

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | 100/240 VAC | CRI ≥80 | PF >0,8 | IP 54 | 120° | 50/60 Hz | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 8 sec 8 min | STANDBY 0%-10% | CCT SWITCH

OUTDOOR COVERED

OUTDOOR



Mini Mac wall





Mac wall





Mac wall XL





*Included 33mm base, optional 53mm base.

Technical Information

	Mini Mac wall	Mac wall	Mac wall XL
Power	6W	15W	20W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm	1.500 lm	2.000 lm
Material	Aluminium + pc / Pc (wood)	Aluminium + pc / Pc (wood)	Aluminium + pc / Pc (wood)
Finishes	White / Black / Wood / Corten	White / Black / Wood / Corten	White / Black / Wood / Corten

Code	Mini Mac wall	Mac wall	Mac wall XL
	○ 4995	○ 4998	○ 5001
	● 4996	● 4999	● 5002
	4997	5000	5003
	5218	5219	5220
	ⓘ Custom RAL	ⓘ Custom RAL	ⓘ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories

53mm



Mini mac base
○ 5226 ○ 5228
● 5227 ○ 5229

53mm



Mac base
○ 5230 ○ 5232
● 5231 ○ 5233

53mm



Mac XL base
○ 5234 ○ 5236
● 5235 ○ 5237



CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | IK06 | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/10

OUTDOOR



Mac wall base





Technical Information

Power	12W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.020 lm
Material	Aluminium and Polycarbonate
Finishes	White / Black / Corten

Code	
	○ 5264
	● 5265
	● 5266

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 110° | 50/60 Hz | IK06 | +50°C -20°C | CCT SWITCH | 1/6


▶ VIDEO

Mini Comet





Comet





Technical Information

	Mini Comet	Comet
Power	Switch 10W / 20W	Switch 20W / 40W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	10W: 1.250 lm / 20W 2.400 lm	20W: 2.500 lm / 40W: 5.000 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code		
	☐ 5075	☐ 5073
	■ 5076	■ 5074
	■ 5113	■ 5112
	1/16	1/6

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 40°x90° | 50/60 Hz | IK10 | +45°C -25°C | AKZO NOBEL | CCT SWITCH | POWER SWITCH | TRIAC DIMM





Zibor





Selen





Zibor Selen

Technical Information

	Zibor	Selen
Power	12W	12W
Installation	Surface	Surface
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	1.200 lm / 1.250 lm	1.200 lm / 1.250 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black

Code	Zibor		Selen	
	○ 3.000K	4670	○ 3.000K	4668
	○ 4.000K	4669	○ 4.000K	4667
	● 3.000K	4830	● 3.000K	4828
	● 4.000K	4829	● 4.000K	4827
	ⓘ Custom RAL		ⓘ Custom RAL	

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | IK02 | +40°C -20°C | 1/10

OUTDOOR





Blis r





Blis sq





Blis rect







Technical Information

	Blis r	Blis sq	Blis rect
Power	15W	15W	24W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.470 lm	1.370 lm	2.360 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten

Code	Blis r	Blis sq	Blis rect
	○ 4957	□ 4960	□ 4982
	● 4958	■ 4961	■ 4983
	● 4959	■ 4962	■ 4984
	PF >0,6 | 250°	PF >0,6 | 180°	PF >0,9 | 180°

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

*IP65 connection box included.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | CRI ≥80 | 50/60 Hz | IK04 | +40°C -20°C | CCT SWITCH | 1/6

OUTDOOR



Sunset r





Sunset sq





Technical Information

	Sunset r	Sunset sq
Power	16W	16W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.800 lm	1.800 lm
Material	Policarbonate	Policarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code	Sunset r	Sunset sq
	○ 4989	□ 4992
	● 4990	■ 4993
	● 4991	■ 4994
	ⓘ Custom RAL	ⓘ Custom RAL

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 40° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/10

OUTDOOR



Sunset XL





Sunset XL dual





Technical Information

	Sunset XL	Sunset XL dual
Power	16W	2X16W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.300K / 4.000K	Switch 2.700K / 3.300K / 4.000K
Lumens	1.450 lm	2.900 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code	Sunset XL	Sunset XL dual
	○ 5419	○ 5422
	● 5420	● 5423
	● 5421	● 5424
	ⓘ Custom RAL	ⓘ Custom RAL
	1/20	1/15

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 100/277 VAC | PF >0,9 | CRI >90 | 24° | DUAL 24° | 50/60 Hz | IK05 | +50°C -25°C | CCT SWITCH

OUTDOOR



Mini Pla





Pla





Pla XL





Technical Information

	Mini Pla	Pla	Pla XL
Power	20W	35W	35W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	900 lm	1.400 lm	1.400 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten
Code	☐ 5684	☐ 5687	☐ 5690
	■ 5685	■ 5688	■ 5691
	■ 5686	■ 5689	■ 5692
	ⓘ Custom RAL	ⓘ Custom RAL	ⓘ Custom RAL
	1/10	1/10	1/6

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 110° | 50/60 Hz | +50°C -20°C | CCT SWITCH

OUTDOOR





Optic







Technical Information

Power	2W
Installation	Recessed
Color Temperature	3.000K
Lumens	55 lm
Material	Inox 304
Finishes	Brushed silver

Code	4331

Accessories



Linear Joint IP68
Ø26x95mm
5671



T Joint IP68
74x118mm
5672



X Joint IP68
122x122mm
5673

CE RoHS

*Recessed box included. Integrated driver.

3 YEARS WARRANTY | 50.000 HOURS | IP 67 | 100/240 VAC | PF >0,4 | CRI ≥80 | CABLE 50CM | 2.000Kg | 35° | 50/60 Hz | IK09 | +50°C -20°C | 1/50

OUTDOOR



Nano Sigma	Mini Sigma	Sigma	Sigma XL

















Technical Information

Power	3W	9W	12W	17W
Installation	Recessed	Recessed	Recessed	Recessed
Color Temperature	3.000K	3.000K	3.000K	3.000K
Lumens	210 lm	450 lm	650 lm	1.440 lm
Material	Stainlees steel + alumin.	Stainlees steel + alumin.	Stainlees steel + alumin.	Stainlees steel + alumin.
Finishes	Brushed silver	Brushed silver	Brushed silver	Brushed silver
Code	3.000K 4251	3.000K 5576	3.000K 5577	3.000K 4135
	PF >0,6 | 1/30	PF >0,5 | 1/12	PF >0,9 | 1/8	PF >0,9 | 1/8

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS EMC

*Integrated driver. Drainage (min. 300mm).

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 100/277 VAC | CRI ≥80 | CABLE 24CM | 30° | 50/60 Hz | IK05 | +40°C -20°C

OUTDOOR

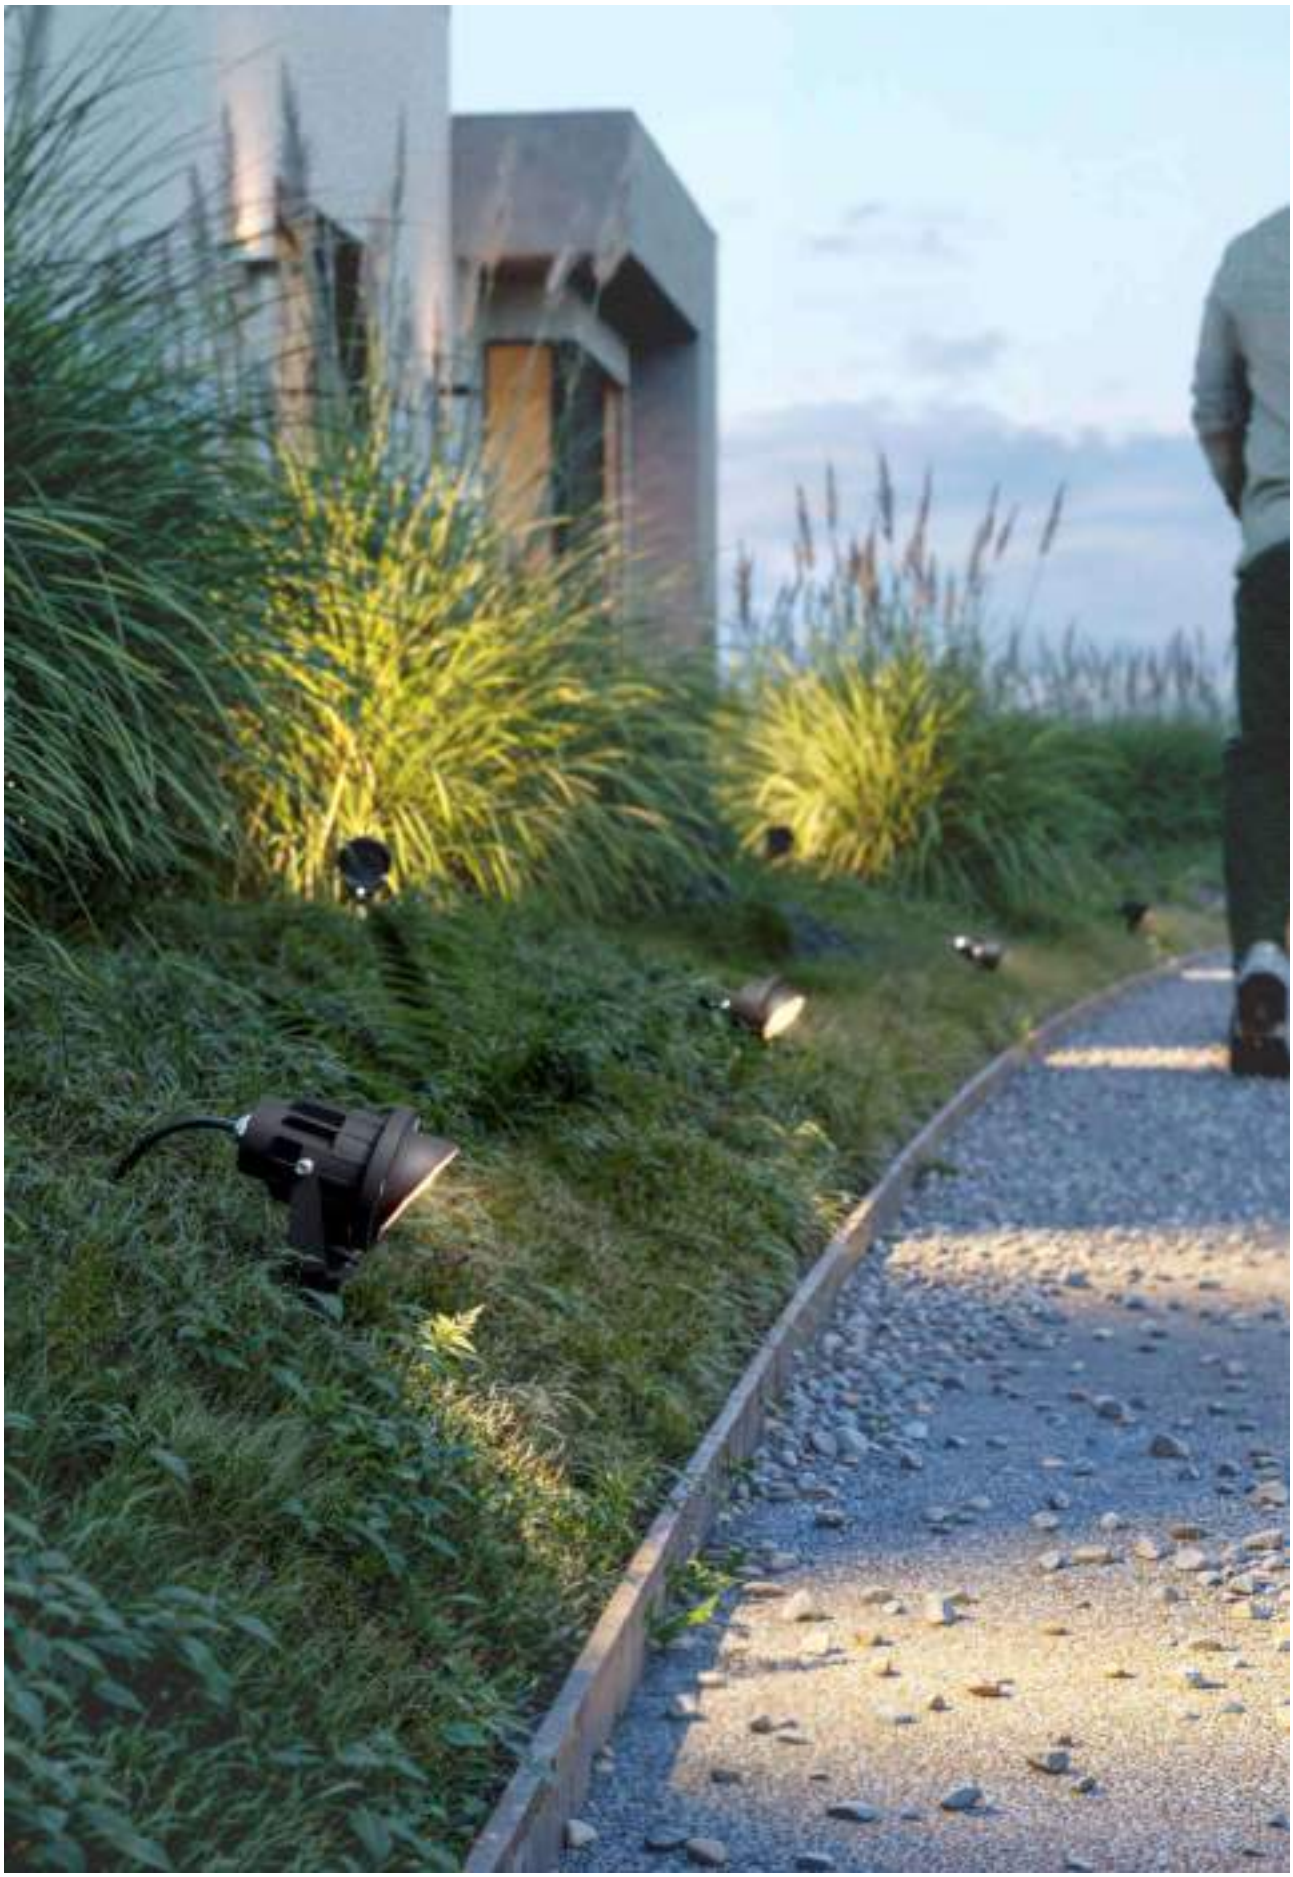

Caddie





Fade





Caddie

Fade

Technical Information

	Caddie	Fade
Power	3W	5W
Installation	Floor	Floor
Color Temperature	2.200K / 3.000K	2.200K / 3.000K
Lumens	200 lm / 270 lm	350 lm / 450 lm
Material	Aluminium	Aluminium
Finishes	Black / Corten	Black / Corten

Code					
	●	2.200K	5678	● 2.200K	5680
	●	3.000K	3581	● 3.000K	3580
	●	2.200K	5679	● 2.200K	5681
	●	3.000K	4923	● 3.000K	4924
			CRI ≥80		CRI ≥90

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS EMC

*Spike included.

3 YEARS WARRANTY | 35.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CABLE 24CM | 45° | 50/60 Hz | IK05 | +40°C -20°C | 1/50

OUTDOOR

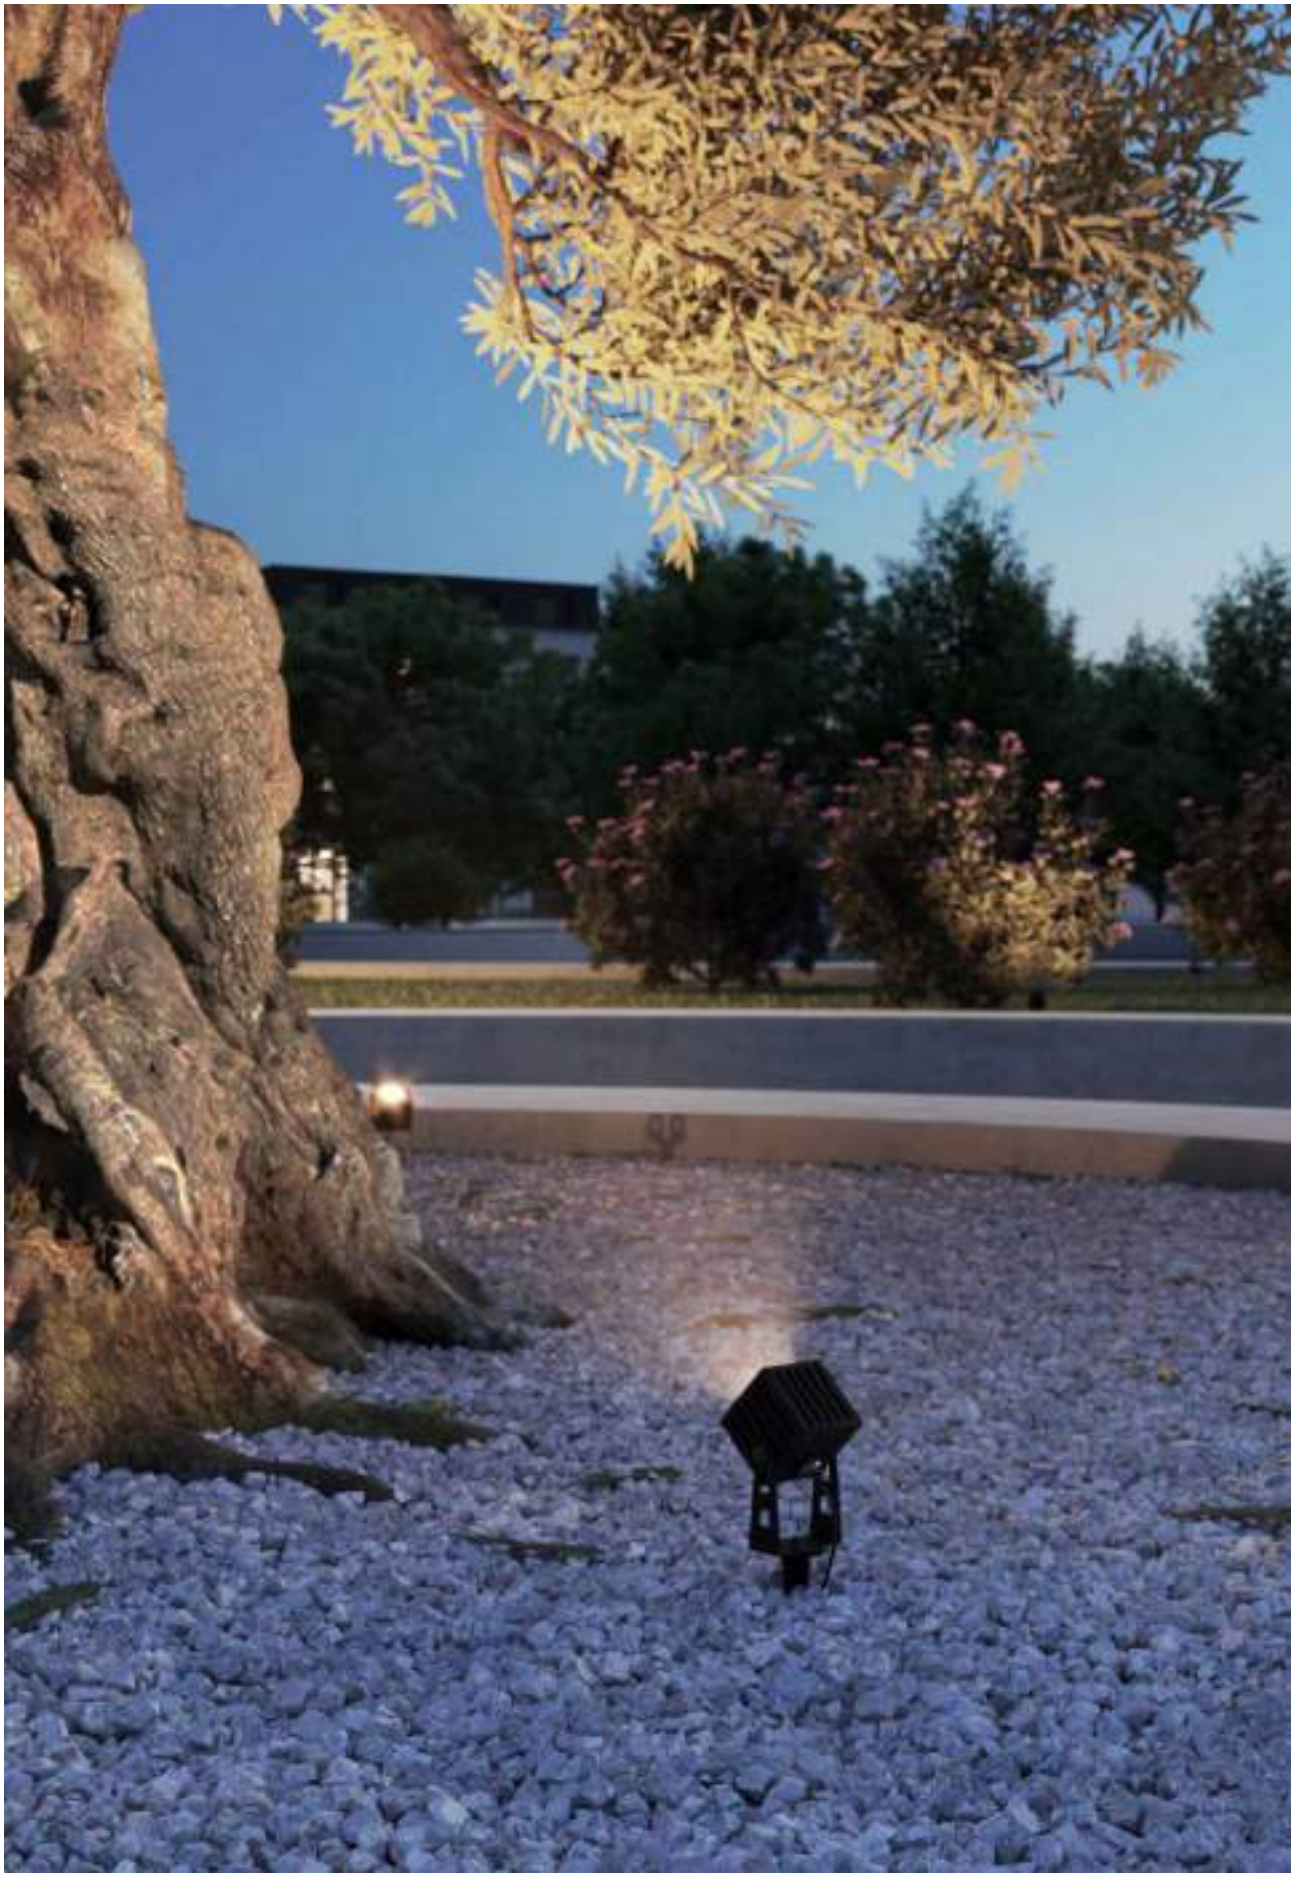

Zas r





Zas sq





Technical Information

	Zas r	Zas sq
Power	3W	7W
Installation	Floor	Floor
Color Temperature	2.200K / 3.000K	3.000K / GREEN
Lumens	200 lm / 240 lm	450 lm / 380
Material	Aluminium	Aluminium
Finishes	Black / Corten	White / Black / Corten

Code					
	●	2.200K	5682	□	3.000K	4690
	●	3.000K	4134	■	3.000K	4692
	●	2.200K	5683	■	GREEN	5694
	●	3.000K	4922	■	3.000K	4693
				■	GREEN	5693

100/277 VAC | 20.000 HOURS | PF >0,6 | 30° | IK05

220/240 VAC | 30.000 HOURS | PF >0,9 | 40° | IK08

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

*Spike included.

3 YEARS WARRANTY | IP 65 | CRI ≥80 | CABLE 24CM | 50/60 Hz | +40°C -20°C | 1/50

OUTDOOR


▶ VIDEO

Nik





Technical Information

Power	5W
Installation	Surface
Color Temperature	3.000K / 4.000K
Lumens	340 lm / 350 lm
Material	Aluminium
Finishes	Gray

Code			
	●	3.000K	4291
	●	4.000K	4292

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

*Integrated driver.

3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥70 | 5° | 50/60 Hz | IK05 | +40°C -20°C | 1/40

OUTDOOR



Signal





Technical Information

Power	9W
Installation	Floor / Tree trunk
Color Temperature	3.000K
Lumens	720 lm
Material	Aluminium
Finishes	Dark gray

Code	3.000K	4290

CE RoHS

*Integrated driver. IP65 connection box included.

3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥80 | CABLE 20CM | 30° | 50/60 Hz | IK05 | +40°C -20°C | 1/25

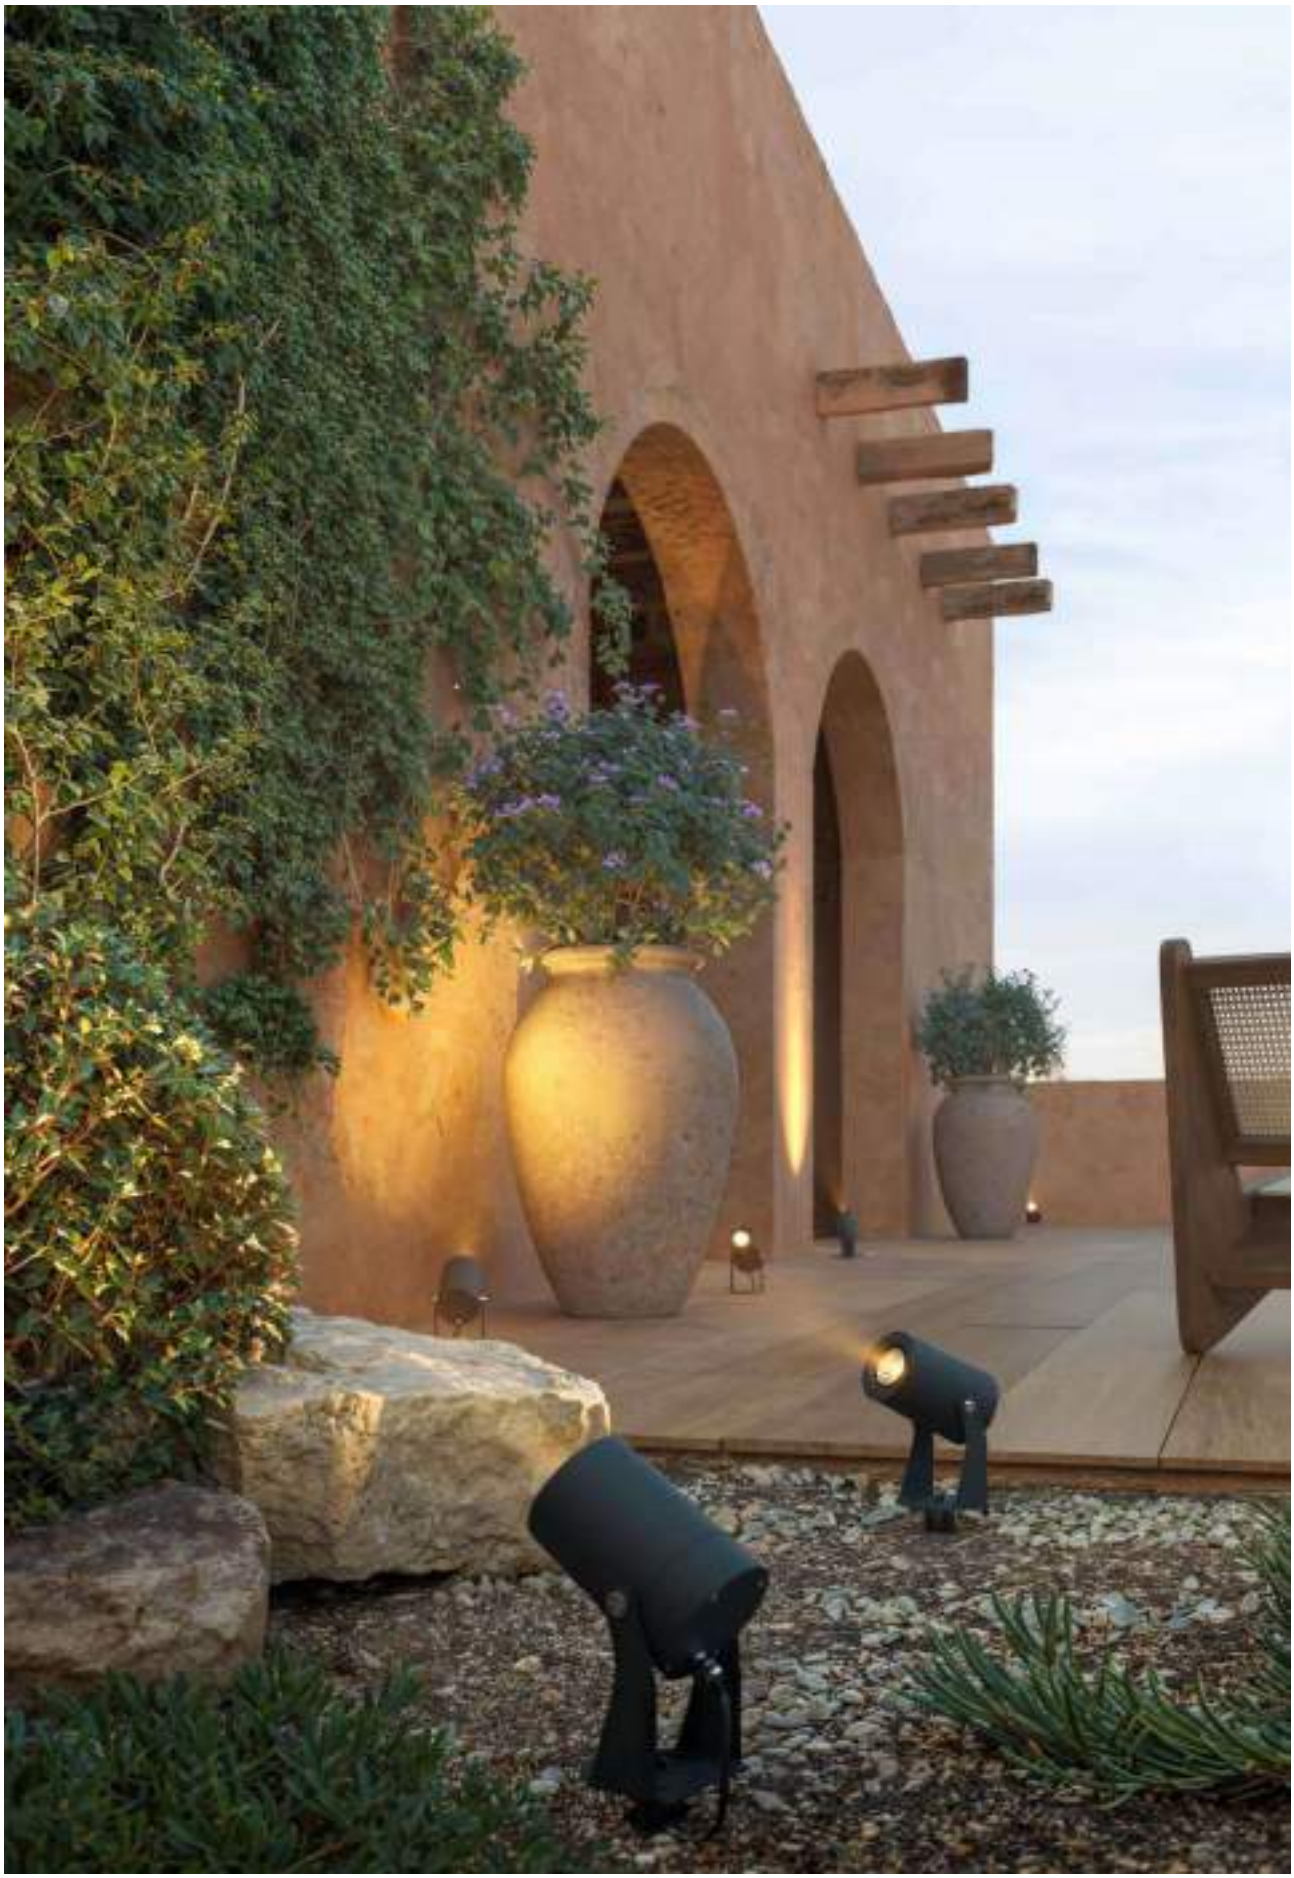

Sair





Sair XL





Technical Information

	Sair	Sair XL
Power	10W	20W
Installation	Floor	Floor
Color Temperature	2.200K / 3.000K	2.200K / 3.000K
Lumens	450 lm / 900 lm	1.000 lm / 1.500 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code						
	○	3.000K	4894	○	3.000K	4897
	●	2.200K	5674	●	2.200K	5676
	●	3.000K	4895	●	3.000K	4898
	●	2.200K	5675	●	2.200K	5677
	●	3.000K	4896	●	3.000K	4899

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS EAC

*Spike included.

3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/265 VAC | PF >0,9 | CRI ≥90 | CABLE 24CM | 18° | 50/60 Hz | IK05 | +40°C -20°C | 1/20

OUTDOOR



Fix





Technical Information

Installation	Floor
Material	Polypropylene
Finishes	Black
Lamp Holder	E27

Code	● 4820

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

*Spike included. Recomended lamp Par 38 (page 697).

3 YEARS WARRANTY | IP 65 | | 50/60 Hz | 1/6

OUTDOOR


▶ VIDEO

Wech









Technical Information

Power	10W
Installation	Portable
Color Temperature	Switch 3.000K / 4.000K / 5.000K
Lumens	600 lm
Material	Aluminium & Polycarbonate
Finishes	White / Black

Code	
	☐ 5004
	■ 5005

CE RoHS EMC

Clamp, lyre and charger included.

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | POWER BANK | 10 HOURS | 6 HOURS 4.400 mAh | USB-C 5V | IP 65 | CRI ≥80 | 110° | IK08 | +45°C -10°C | CCT SWITCH | 1/10



Sky 10W spike





Technical Information

Power	10W
Installation	Floor
Color Temperature	3.000K / GREEN
Lumens	1.000 lm / 820 lm
Material	Aluminium
Finishes	Corten

Code			
	■	3.000K	4340
	■	GREEN	4341

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

*Spike included.

5 YEARS WARRANTY | 50.000 HOURS | | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >1KV | 1/32

OUTDOOR

Sky 10W switch





Sky 20W switch







▶ VIDEO

Technical Information

	Sky 10W switch	Sky 20W switch
Power	10W	20W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.200 lm	2.400 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray	White / Gray
Code	☐ 4679	☐ 4682
	■ 4680	■ 4684
	■ 4681	
	1/32	1/24

Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | CCT SWITCH | >1KV

Sky 30W switch





Sky 40W switch







▶ VIDEO

Technical Information

	Sky 30W switch	Sky 40W switch
Power	30W	40W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	3.600 lm	4.800 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray	White / Black
Code	☐ 4685	☐ 4688
	■ 4686	■ 4689
	■ 4687	
	1/24	1/12

Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | CCT SWITCH | >1KV

OUTDOOR







NEW

Sky 10W 4CCT



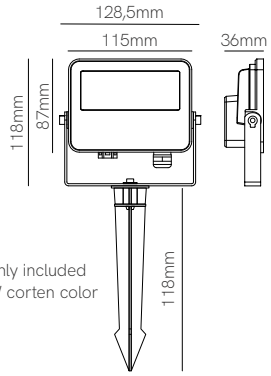

Sky 20W 4CCT





Technical Information

	Sky 10W 4CCT	Sky 20W 4CCT
Power	10W	20W
Installation	Surface	Surface
Color Temperature (Switch)	2.700K / 3.000K / 4.000K / 5.000K	2.700K / 3.000K / 4.000K / 5.000K
Lumens	997 / 1.100 / 1.270 / 1.090 lm	2.080 / 2.180 / 2.480 / 2.080 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray / Corten	White / Black / Gray / Corten

Code		
	☐ 4679-N	☐ 4682-N
	■ 4680-N	■ 4683-N
	■ 4681-N	■ 4684-N
	■ 5729	■ 5730
	1/32	1/24

Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | 110° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | 4CCT SWITCH | >1KV

NEW

Sky 30W 4CCT





Sky 40W 4CCT





Technical Information

	Sky 30W 4CCT	Sky 40W 4CCT
Power	30W	40W
Installation	Surface	Surface
Color Temperature (Switch)	2.700K / 3.000K / 4.000K / 5.000K	2.700K / 3.000K / 4.000K / 5.000K
Lumens	3.270 / 3.390 / 3.900 / 3.420 lm	4.000 / 4.840 / 4.880 / 4.080 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray / Corten	White / Black / Gray / Corten

Code		
	☐ 4685-N	☐ 4688-N
	■ 4686-N	■ 4689-N
	■ 4687-N	■ 4694-N
	■ 5731	■ 5732
	1/24	1/12

Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | 110° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | 4CCT SWITCH | >1KV



Sky 10W sensor





Sky 30W sensor





Sky 50W sensor





Technical Information

Power	10W	30W	50W
Installation	Surface	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K / 5.000K	4.000K / 5.000K
Lumens	1.150 lm / 1.200 lm	3.550 lm / 3.600 lm	5.950 lm / 6.000 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code								
	☐	4.000K	4349	☐	4.000K	4352	☐	4.000K	4354
	☐	5.000K	4350	☐	5.000K	4353	☐	5.000K	4355
	■	4.000K	4308	■	4.000K	4309	■	4.000K	4311
	■	5.000K	4351	■	5.000K	4310	■	5.000K	4356
			1/32			1/24			1/12

Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | MICROWAVE SENSOR | 5 sec 5 min | 1m 7m | ON OFF | >1KV

Sky 10W	Sky 20W	Sky 30W













Technical Information

Power	10W	20W	30W
Installation	Surface	Surface	Surface
Color Temperature	5.000K	2.700K / 4.000K / 5.000K	2.700K / 4.000K
Lumens	1.150 lm	2.250 lm / 2.400 lm / 2.450 lm	3.450 lm / 3.600 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White	Black / Corten	Corten
Code	☐ 5.000K 4254	■ 5.000K 4266 ■ 2.700K 4401 ■ 4.000K 4402	■ 2.700K 4279 ■ 4.000K 4280
	1/36	1/32	1/24

Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >1KV

Sky 100W	Sky 150W	Sky 200W













Technical Information

	Sky 100W	Sky 150W	Sky 200W
Power	100W	150W	200W
Installation	Surface	Surface	Surface
Color Temperature	2.200K	2.200K	2.200K
Lumens	7.000 lm	11.000 lm	14.000 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black
Code	■ 3955	■ 3956	■ 3957
	1/4	1/2	1/2

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >2KV

OUTDOOR





New

Polaris 100W





Polaris 150W





Polaris 200W





Technical Information

	Polaris 100W	Polaris 150W	Polaris 200W
Power	100W	150W	200W
Installation	Surface	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	12.700 lm / 13.000 lm / 13.200 lm	19.200 lm / 19.500 lm / 19.700 lm	25.700 lm / 26.000 lm / 26.200 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Code	☐ 5702	☐ 5703	☐ 5704
	■ 5698	■ 5699	■ 5700
	1/4	1/3	1/3

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | CCT SWITCH | >6KV



Krion 300W





5m	10m	15m	20m
380 lx	100 lx	45 lx	25 lx

Krion 400W





5m	10m	15m	20m
470 lx	120 lx	55 lx	30 lx

Technical Information

	Krion 300W	Krion 400W
Power	300W	400W
Installation	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K / 5.000K
Lumens	39.000 lm / 39.300 lm	52.000 lm / 52.300 lm
Material	Aluminium	Aluminium
Finishes	Black	Black

Code	Krion 300W	Krion 400W
	■ 4.000K 4509	■ 4.000K 4510
	■ 5.000K 4511	■ 5.000K 4512

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/277 VAC | PF >0,9 | CRI ≥80 | 80°x140° | 50/60 Hz | IK10 | +45°C -25°C | AKZO NOBEL | >6KV | 1

OUTDOOR



Clos base mini	Clos dual base mini	Clos base	Clos dual base














Technical Information

Installation	Floor	Floor	Floor	Floor
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten	White / Black / Corten
Code	○ 4882	○ 4888	○ 4885	○ 4891
	● 4883	● 4889	● 4886	● 4892
	● 4884	● 4890	● 4887	● 4893
	1/24	1/24	1/12	1/12

Accessories (page 639).



Clos wall
○ 4876
● 4877
● 4878



Clos wall dual
○ 4879
● 4880
● 4881

CE RoHS

5 YEARS WARRANTY | IK08

OUTDOOR



New

Cam





Cam XL





Technical Information

	Cam	Cam XL
Power	9W	9W
Installation	Surface	Surface
Color Temperature	Switch 2.200K / 2.700K / 3.000K	Switch 2.200K / 2.700K / 3.000K
Lumens	700 lm	700 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 5568	☐ 5570
	■ 5569	■ 5571
	1/4	1/2

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 54 | 100/240 VAC | PF >0,8 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +45°C -25°C | CCT SWITCH | POWER 70%-100%

OUTDOOR



Mac floor





Mac floor XL





Technical Information

	Mac floor	Mac floor XL
Power	12W	12W
Installation	Floor	Floor
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	890 lm / 900 lm	890 lm / 900 lm
Material	Aluminium and Polycarbonate	Aluminium and Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code						
	○	3.000K	4837	○	3.000K	4843
	○	4.000K	4838	○	4.000K	4844
	●	3.000K	4839	●	3.000K	4845
	●	4.000K	4840	●	4.000K	4846
	●	3.000K	4841	●	3.000K	4847
	●	4.000K	4842	●	4.000K	4848
			1/12			1/6

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | IK06 | +50°C -20°C

OUTDOOR



Tura





Tura XL





Technical Information

	Tura	Tura XL
Power	12W	12W
Installation	Floor	Floor
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	950 lm / 960 lm	950 lm / 960 lm
Material	Aluminium and Methacrylate	Aluminium and Methacrylate
Finishes	White / Black / Corten	White / Black / Corten

Code	Tura			Tura XL		
	○	3.000K	4849	○	3.000K	4855
	○	4.000K	4850	○	4.000K	4856
	●	3.000K	4851	●	3.000K	4857
	●	4.000K	4852	●	4.000K	4858
	●	3.000K	4853	●	3.000K	4859
	●	4.000K	4854	●	4.000K	4860
			1/6			1/4

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 180° | 50/60 Hz | IK06 | +50°C -20°C

OUTDOOR







Linear Joint IP68	T Joint IP68	X Joint IP68
		
		

Technical Information

Material	Polyamide and Polycarbonate	Polyamide and Polycarbonate	Polyamide and Polycarbonate
Finishes	Black	Black	Black
Code	● 5671	● 5672	● 5673

CE RoHS

3 YEARS WARRANTY | IP 68 | 16A 240 VAC | +85°C -45°C | 1





Solar







Gam





Technical Information

Power	0,7W
Installation	Floor
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	85 lm
Material	ABS + PMMA
Finishes	Black

Code	■ 5178

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 20.000 HOURS | 6-8 HOURS | 6-8H. | 1.800 mAh | IP 54 | CRI ≥80 | 270° | IK02 | +55°C -10°C | ON OFF | CCT SWITCH | 1/50

OUTDOOR




▶ VIDEO





Twist





Technical Information

Power	1W
Installation	Floor
Color Temperature	Switch 2.700K / RGB
Lumens	20 lm
Material	ABS
Finishes	Black

Code	■ 5701

CE RoHS

3 YEARS WARRANTY | 1 YEARS WARRANTY | 10.000 HOURS | 7-8 HOURS | 5-8H. | 500 mAh | IP 54 | CRI ≥80 | 180° | IK04 | +45°C 0°C | ON OFF | CCT SWITCH | 1/20



Popa





Popa XL



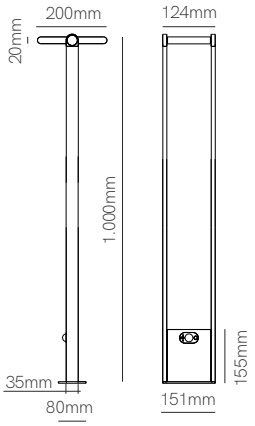

Technical Information

	Popa	Popa XL
Power	1,6W	1,6W
Installation	Floor	Floor
Color Temperature	4.000K	4.000K
Lumens	150 lm	150 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code		
	☐ 3882	☐ 3884
	■ 3883	■ 3885

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 20.000 HOURS | 5-6 HOURS | 15% 10H. 100% 2-3H. | 2.200 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 8 sec 8 min | 1/2



Proa





Technical Information

Power	1,6W
Installation	Surface
Color Temperature	4.000K
Lumens	150 lm
Material	Aluminium
Finishes	White / Black

Code	
	☐ 3531
	■ 3532

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 20.000 HOURS | 5-6 HOURS | 15% 10H. 100% 2-3H. | 2.200 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON | OFF | 8 sec 8 min | 1/6





Egna





Technical Information

Power	3W
Installation	Surface
Color Temperature	4.000K
Lumens	250 lm
Material	Aluminium
Finishes	White / Black

Code	
	☐ 3587
	■ 3592

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 25.000 HOURS | 5-6 HOURS | 11% 20H. 100% 2-3H. | 4.500 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 1/8


▶ VIDEO

Iris





Technical Information

Power	2,5W
Installation	Surface
Color Temperature	4.000K
Lumens	174 lm
Material	Aluminium
Finishes	White / Black

Code	
	☐ 3496
	■ 3497

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 20.000 HOURS | 5-6 HOURS | 15% 10H. 100% 2-3H. | 2.200 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 8 sec 8 min | 1/6



Visor solar





Technical Information

Power	3,5W
Installation	Portable
Color Temperature	3.000K
Lumens	460 lm
Material	Aluminium
Finishes	White / Black / Corten

Code	
	4209
	4193
	4194

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | 10 HOURS | 8 HOURS | 4.500 mAh | IP 65 | CRI ≥80 | 120° | +45°C -25°C | ON OFF | 1/4

OUTDOOR



Sky solar sensor





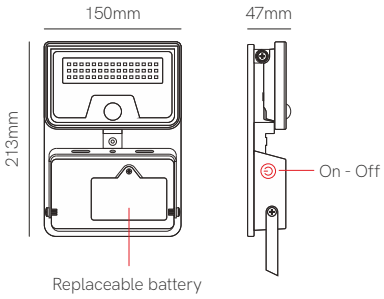

Technical Information

Power	8W
Installation	Surface
Color Temperature	4.000K
Lumens	1.600 lm
Material	Polycarbonate
Finishes	White / Black

Code	
	☐ 5572
	■ 5573

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | 9 HOURS | 10% 12H. 100% 2H. | 4.000 mAh | IP 54 | CRI ≥80 | 120° | 4-6m | PIR SENSOR | ON | OFF | +45°C -20°C | 1/20



▶ VIDEO



Industrial

Ufo Lens switch 60W / 80W / 100W	Ufo Lens switch 90W / 120W / 150W





Technical Information

Power	Switch 60W / 80W / 100W	Switch 90W / 120W / 150W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	131-167 lm/W	128-167 lm/W
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	● 5147	● 5148

Accessories



Lira 100W/150W/200W
■ 4566

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 110° | 50/60 Hz | IK10 | +45°C -25°C | CCT SWITCH | POWER SWITCH | >6KV | 1

Ufo Lens switch
120W / 160W / 200W





Ufo Lens switch
140W / 190W / 240W





Technical Information

Power	Switch 120W / 160W / 200W	Switch 140W / 190W / 240W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	123-169 lm/W	125-156 lm/W
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	● 5149	● 5150

Accessories



Lira 100W/150W/200W
■ 4566



Lira 240W
■ 4567

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 110° | 50/60 Hz | IK10 | +45°C -25°C | CCT SWITCH | POWER SWITCH | >6KV | 1

Ufo Lens Dali 100W	Ufo Lens Dali 150W



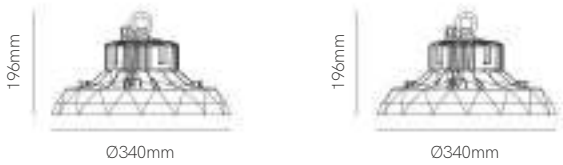

Technical Information

	Ufo Lens Dali 100W	Ufo Lens Dali 150W
Power	100W	150W
Installation	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K / 5.000K
Lumens	16.000 lm / 16.200 lm	24.000 lm / 24.200 lm
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	● 4.000K 4915 ● 5.000K 4916	● 4.000K 4917 ● 5.000K 4918

Accessories



Lira 100W/150W/200W
■ 4566

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 120° | 50/60 Hz | IK10 | +50°C -30°C | >4KV | DALI 2 | 1

Ufo Lens Dali 200W





Ufo Lens Dali 240W





Technical Information

	Ufo Lens Dali 200W	Ufo Lens Dali 240W
Power	200W	240W
Installation	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K
Lumens	32.000 lm / 32.200 lm	38.400 lm
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	● 4.000K 4919 ● 5.000K 4920	● 4.000K 4921

Accessories



Lira 100W/150W/200W
■ 4566



Lira 240W
■ 4567

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 120° | 50/60 Hz | IK10 | +50°C -30°C | >4KV | DALI | 1





Rotable Lens

Ufo lens 100W	1m	5m	11m	1m	5m	10m	1m	5m	10m
	9.113 lx	365 lx	75 lx	7.867 lx	315 lx	79 lx	6.638 lx	266 lx	66 lx
Ufo lens 150W	1m	7m	14m	1m	6m	13m	1m	6m	12m
	13.670 lx	279 lx	70 lx	11.800 lx	328 lx	70 lx	9.956 lx	277 lx	69 lx
Ufo lens 200W	1m	8m	16m	1m	7m	15m	1m	7m	14m
	18.226 lx	225 lx	71 lx	15.733 lx	321 lx	70 lx	13.275 lx	271 lx	68 lx
Ufo lens 240W	1m	9m	19m	1m	9m	19m	1m	9m	19m
	26.635 lx	329 lx	74 lx	26.654 lx	292 lx	73 lx	15.882 lx	324 lx	68 lx





Retrofit

Tutto MR11







Tutto GU10







Technical Information

Power	4W	4W
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	240 lm / 250 lm / 260 lm	285 lm / 300 lm / 315 lm

Code	2.700K	3447	2.700K	3444
	3.000K	3448	3.000K	3445
	4.000K	3449	4.000K	3446
	12V AC/DC		220/240 VAC	

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

Hook GU10	Hook GU10 dimmable
	
	

Technical Information

Power	6W	6W
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	570 lm / 594 lm / 616 lm	570 lm / 594 lm / 616 lm

Code	2.700K	4023	2.700K	3654-N
	3.000K	4024	3.000K	3655-N
	4.000K	4025	4.000K	3656-N

DIMM

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

Uniform-line MR16	Uniform-line GU10	Uniform-line GU10 dimmable













Technical Information

	Uniform-line MR16	Uniform-line GU10	Uniform-line GU10 dimmable
Power	6W	6W	6W
Color Temperature	2.700K/3.000K/4.000K/5.000K	2.700K/3.000K/4.000K/5.000K	2.700K / 3.000K / 4.000K
Lumens	480 lm/510 lm/545 lm/560 lm	480 lm/510 lm/545 lm/560 lm	490 lm / 500 lm / 530 lm

Code					
	2.700K	4019-V2	2.700K	4015-V2	2.700K 4227
	3.000K	4020-V2	3.000K	4016-V2	3.000K 4228
	4.000K	4021-V2	4.000K	4017-V2	4.000K 4229
	5.000K	4022-V2	5.000K	4018-V2	

12V AC/DC | 220/240 VAC | 220/240 VAC | DIMM

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/50

Narrow GU10 dimmable







Technical Information

Power	7W
Color Temperature	2.700K / 3.000K
Lumens	400 lm / 420 lm

Code	2.700K	4672
	3.000K	4671

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 15° | 50/60 Hz | DIMM | +40°C -20°C | 10/50

System MR16	System GU10	System GU10 dimmable
		
		
		

Technical Information

Power	8W			8W			8W	
Color Temperature	2.700K / 3.000K / 4.000K			2.700K / 3.000K / 4.000K			2.700K / 3.000K / 4.000K	
Lumens	725 lm / 780 lm / 825 lm			725 lm / 780 lm / 825 lm			660 lm / 700 lm / 750 lm	
Code	2.700K	3435-N		2.700K	3432-N		2.700K	3492-N
	3.000K	3436-N		3.000K	3433-N		3.000K	3493-N
	4.000K	3437-N		4.000K	3434-N		4.000K	3494-N
			12V AC/DC			220/240 VAC		220/240 VAC | DIMM

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

R-63 s-line GU10







Technical Information

Power	8W
Color Temperature	2.700K
Lumens	720 lm
Code	4003

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 220/240 VAC | PF >0,8 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

Power MR16	Power GU10	Power GU10 dimmable
		
		

Technical Information

Power	12W			10W / 12W			12W	
Color Temperature	2.700K / 3.000K / 4.000K			2.700K / 3.000K / 4.000K			2.700K / 3.000K / 4.000K	
Lumens	900 lm / 950 lm / 1.000 lm			950 lm / 1.000 lm / 1.050 lm			950 lm / 1.000 lm / 1.050 lm	
Code	2.700K	3441		12W 2.700K	3438		2.700K	3489
	3.000K	3442		10W 3.000K	4295		3.000K	3490
	4.000K	3443		10W 4.000K	4296		4.000K	3491
			12V AC/DC			220/240 VAC		220/240 VAC | DIMM

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

Lynk G53





Lynk GU10





Lynk GU10 dimmable





Technical Information

Power	13W		13W			13W		
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K			2.700K / 3.000K / 4.000K		
Lumens	880 lm / 900 lm / 950 lm		880 lm / 900 lm / 950 lm			880 lm / 900 lm / 950 lm		
Code	2.700K	3452	2.700K	3455		2.700K	3464	
	3.000K	3453	3.000K	3456		3.000K	3465	
	4.000K	3454	4.000K	3457		4.000K	3466	
	12V AC/DC		220/240 VAC			220/240 VAC	DIMM	

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C -20°C | 10/30

AR111 15° G53





AR111 15° GU10





Technical Information

Power	15W	15W
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	1.350 lm / 1.400 lm / 1.500 lm	1.350 lm / 1.400 lm / 1.500 lm

Code	2.700K	5187	2.700K	5190
	3.000K	5188	3.000K	5191
	4.000K	5189	4.000K	5192
	PF >0,5 | 12V AC/DC		PF >0,9 | 220/240 VAC	

CE RoHS EMC

3 YEARS WARRANTY | 15.000 HOURS | IP 20 | CRI ≥80 | 15° | 50/60 Hz | +40°C -20°C | 10/30

Nitro GU10







Dole GU10







Technical Information

Power	15W	15W
Color Temperature	2.700K	2.700K / 3.000K / 4.000K
Lumens	1.000 lm	1.050 lm / 1.100 lm / 1.120 lm

Code	3470	2.700K	3467
		3.000K	3468
		4.000K	3469

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C -20°C | 10/30

Shop E14





Prisma E14





Shop

Prisma

Technical Information

Power	2W	4W
Color Temperature	3.000K	3.000K
Lumens	180 lm	340 lm
Code	3450	3474-M

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | PF >0,3 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

Flama E14/E27





Flama dimmable E14





Technical Information

Power	5,5W	5,5W
Color Temperature	2.700K / 3.000K / 5.000K	3.000K
Lumens	450 lm / 500 lm / 550 lm	418 lm

Code					
	2.700K	E14	592122-FL2	3.000K	592122R-C3
	2.700K	E27	592122-FL2E		
	3.000K	E14	592122-FL3		
	3.000K	E27	592122-FLE3		
	5.000K	E14	3534		

DIMM

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

Esférica 5W E14/E27





Esférica 5,5W E14/E27 dimmable





Esférica 7W E14/E27





Technical Information

Power	5W		5,5W		7W		
Color Temperature	2.700K/3.000K/4.000K/5.000K		2.700K / 3.000K / 4.000K		2.700K/3.000K/4.000K/5.000K		
Lumens	440 lm/462 lm/484 lm/495 lm		396 lm / 418 lm / 440 lm		700 lm/750 lm/800 lm/820 lm		
Code	2.700K	E14	592563-4C2(N)	2.700K	E14	592563R-C2	2.700K	E14	4243
	2.700K	E27	5925631-4C2(N)	2.700K	E27	592563R1-C2	2.700K	E27	4244
	3.000K	E14	592563(N)-4C(N2)	3.000K	E14	592563R-C3	3.000K	E14	4245
	3.000K	E27	5925631(N)-4C(N2)	3.000K	E27	592563R1-C3	3.000K	E27	4246
	4.000K	E14	592563(N)-4F(N2)	4.000K	E14	592563R-F4	4.000K	E14	4247
	4.000K	E27	5925631(N)-4F(N2)	4.000K	E27	592563R1-F4	4.000K	E27	4248
	5.000K	E14	3538(N)				5.000K	E14	4249
	5.000K	E27	3537(N)				5.000K	E27	4250
	5 YEARS WARRANTY | 50.000 HOURS | IP 40			3 YEARS WARRANTY | 25.000 HOURS | IP 40 | DIMM			3 YEARS WARRANTY | 25.000 HOURS | IP 20		

CE RoHS

220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

Standard 6W E27





Standard 9W E27





Technical Information

Power	6W	9W
Color Temperature	2.700K / 3.000K / 4.000K	2.700K/3.000K/4.000K/5.000K
Lumens	534 lm / 550 lm / 660 lm	880 lm/891 lm/935 lm/945 lm

Code	2.700K	592125S-6(N)	2.700K	592125SC-2(N)
	3.000K	592125S-6C(N)	3.000K	592125SC-3(N)
	4.000K	592125S-6F(N)	4.000K	592125SC-4(N)
			5.000K	3539(N)

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

Standard 12W E27



Standard 15W E27







Technical Information

Power	12W	15W
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	1.100 lm / 1.122 lm / 1.144 lm	1.550 lm / 1.600 lm / 1.650 lm

Code	2.700K	3479(N)	2.700K	3482(N)
	3.000K	3480(N)	3.000K	3483(N)
	4.000K	3481(N)	4.000K	3484(N)

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

Standard 10W E27 dimmable	Standard 12W E27 dimmable	Standard 17W E27 dimmable













Technical Information

Power	10W		12W		17W		
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K		2.700K/3.000K/4.000K/5.000K		
Lumens	880 lm / 891 lm / 935 lm		1.100 lm / 1.122 lm / 1.144 lm		1.550 lm / 1.600 lm / 1.650 lm / 1.700 lm		
Code	2.700K	592125R-C	2.700K	592125R2-C	2.700K	3527	
	3.000K	592125R-C3	3.000K	592125R2-C3	3.000K	3528	
	4.000K	592125R-F	4.000K	592125R2-F	4.000K	3529	
					5.000K	3530	

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | DIMM | +40°C -20°C | 10/50

Micro globo 6W E27	Globo 10W E27	Globo 10W E27 dimmable













Technical Information

Power	6W		10W		10W		
Color Temperature	2.700K / 3.000K		2.700K / 3.000K / 4.000K		3.000K		
Lumens	480 lm / 500 lm		1.100 lm / 1.130 lm / 1.180 lm		800 lm		
Code	2.700K	505143E-C	2.700K	3524	3.000K	505119DIM-C	
	3.000K	3881	3.000K	3525			
			4.000K	3526			
	5 YEARS WARRANTY | 50.000 HOURS		3 YEARS WARRANTY | 25.000 HOURS		3 YEARS WARRANTY | 25.000 HOURS | DIMM		

CE RoHS

IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/40

Globo 15W E27





Globo 16W E27





Globo 22W E27





Technical Information

	15W	16W	22W
Power	15W	16W	22W
Color Temperature	2.700K / 4.000K	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	1.400 lm / 1.500 lm	1.600 lm / 1.700 lm / 1.750 lm	2.400 lm / 2.500 lm / 2.600 lm

Code					
	2.700K	4677	2.700K	3521	2.700K 3518
	4.000K	4678	3.000K	3522	3.000K 3519
			4.000K	3523	4.000K 3520

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/40

R-39 E14	R-50 E14	R-63 E27
		







R-39 R-50 R-63

Technical Information

Power	3W	5W	8W
Color Temperature	3.000K	3.000K	3.000K
Lumens	308 lm	385 lm	660 lm
Code	592122R39-2	5920731-(N2)	592072-1
	IP 40	IP 40	IP 20

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | 220/240 VAC | PF >0,8 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/50

R-80 E27	R-90 2.200K E27	R-90 3.000K E27
		







R-80 R-90

Technical Information

Power	10W	12W	12W
Color Temperature	3.000K	2.200K	3.000K
Lumens	891 lm	850 lm	1.100 lm
Code	592076-C3(N)	4137	592074-C(N)

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/40

Pl T40 E27





Technical Information

Power	10W
Color Temperature	3.000K / 4.000K
Lumens	825 lm / 880 lm

Code	3.000K	582L016T40E-C3
	4.000K	582L016T40E-F

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

Par 30 E27	Par 38 3.000K E27	Par 38 Green E27
		







PAR 30 PAR 38

Technical Information

Power	10W	15W	15W
Color Temperature	3.000K	3.000K	GREEN
Lumens	660 lm	1.100 lm	190 lm
Code	171160P30-C	171160P38(N)-C	3579
	45°	30°	30°

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,8 | CRI ≥80 | 50/60 Hz | +40°C -20°C | 10/40

Sil E27





Technical Information

Power	20W
Color Temperature	2.700K / 4.000K
Lumens	2.035 lm / 2.550 lm

Code		
	2.700K	592165SIL-C
	4.000K	592165SIL-F

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥85 | 360° | 50/60 Hz | +40°C -20°C | 6/24

Aria 30W E27/E40





Aria 50W E27/E40





Technical Information

Power	30W	50W
Color Temperature	2.700K / 5.000K	2.700K / 5.000K
Lumens	3.100 lm / 3.550 lm	5.400 lm / 6.200 lm

Code						
	2.700K	E27	3854	2.700K	E27	3858
	2.700K	E40	3856	2.700K	E40	3860
	5.000K	E27	3855	5.000K	E27	3859
	5.000K	E40	3857	5.000K	E40	3861

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | > 1KV | ENCLOSED NO | 6/24

Obo 19W E27





Obo 27W E27





Technical Information

Power	19W	27W
Color Temperature	2.200K / 5.000K	2.200K / 5.000K
Lumens	1.425 lm / 1.900 lm	2.025 lm / 3.000 lm

Code	2.200K	3909	2.200K	3910
	5.000K	3917	5.000K	3918

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 170° | 50/60 Hz | +60°C -40°C | > 4KV | ENCLOSED OK | 16

Obo 36W E27/E40





Obo 45W E27/E40





Technical Information

	36W	45W
Power	36W	45W
Color Temperature	2.200K / 5.000K	2.200K / 5.000K
Lumens	2.700 lm / 3.900 lm	3.375 lm / 4.500 lm

Code						
	2.200K	E27	3911	2.200K	E27	3912
	2.200K	E40	3920	2.200K	E40	3923
	5.000K	E27	3919	5.000K	E27	3922
	5.000K	E40	3921	5.000K	E40	3924

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 170° | 50/60 Hz | +60°C -40°C | > 4KV | ENCLOSED OK | 16

Smile 20W E27	Smile 40W E27	Smile 60W E40
		
		

Technical Information

Power	20W			40W			60W	
Color Temperature	2.200K / 5.000K			2.200K / 5.000K			2.200K / 5.000K	
Lumens	2.000 lm / 3.000 lm			4.000 lm / 6.000 lm			6.000 lm / 9.000 lm	
Code	2.200K	3913		2.200K	3914		2.200K	3915
	5.000K	3925		5.000K	3926		5.000K	3927
		24			12			12

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 120° | 50/60 Hz | +60°C -40°C | > 4KV | ENCLOSED OK

Cup 45W E27/E40





Technical Information

Power	45W
Color Temperature	3.000K
Lumens	3.960 lm

Code	3.000K	E40	592141-E4C3

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | ENCLOSED NO | 6

Noa 80W E27/E40





Noa 85W E27/E40





Technical Information

Power	80W	85W
Color Temperature	2.200K	2.700K / 5.000K
Lumens	5.900 lm	9.700 lm / 10.200 lm

Code	2.200K	E27/ E40	3965	2.700K	E27	3902
				2.700K	E40	3900
				5.000K	E27	3903
				5.000K	E40	3901

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | ENCLOSED NO | 8

Adn G4





Technical Information

Power	2,5W
Color Temperature	3.000K
Lumens	198 lm

Code	130L006

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,6 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

Uniform-line G4





Uniform-line long G4





Technical Information

Power	1,3W	1,6W
Color Temperature	3.000K / 5.000K	3.000K / 5.000K
Lumens	150 lm / 158 lm	203 lm / 223 lm

Code	3.000K	130L006-2	3.000K	130L195-C
	5.000K	130L006-2F	5.000K	130L195-D

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,5 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

Uniform-line G9





Uniform-line long G9





Technical Information

Power	2,5W	2,8W
Color Temperature	3.000K / 5.000K	3.000K / 5.000K
Lumens	242 lm / 250 lm	308 lm / 314 lm

Code	3.000K	130L184-5	3.000K	130L195-A
	5.000K	130L184-5F	5.000K	130L195-B

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

Max BA15d







Technical Information

Power	7W
Color Temperature	2.700K
Lumens	500 lm
Code	3569

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,5 | CRI ≥80 | 24° | 50/60 Hz | +40°C -20°C | 6/30

Cala 9W G24





Cala 10W G24





Technical Information

Power	9W	10W
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	880 lm / 935 lm	1.100 lm / 1.155 lm

Code	3.000K	582L015-C3	3.000K	582L015-C3B
	4.000K	582L015-F4	4.000K	582L015-F4B

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 135° | 50/60 Hz | +40°C -20°C | 10/50

Lineal tubular 5W R7S	Lineal tubular 9W R7S	Lineal tubular 9W R7S dimmable













Technical Information

Power	5W		9W		9W		
Color Temperature	3.000K / 4.000K		3.000K / 4.000K		3.000K / 4.000K		
Lumens	561 lm / 574 lm		935 lm / 1.000 lm		935 lm / 1.000 lm		
Code	3.000K	140026-C3T	3.000K	141123-TC3	3.000K	141123-TC3D	
	4.000K	140026-F4T	4.000K	141123-TF4	4.000K	141123-TF4D	
		3 YEARS WARRANTY		3 YEARS WARRANTY		4 YEARS WARRANTY	DIMM

CE RoHS

25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 6/30

Lineal 9W R7S





Lineal tubular 11W R7S dimmable





Lineal 13W R7S





Technical Information

Power	9W		11W		13W		
Color Temperature	3.000K / 4.000K		3.000K / 4.000K		3.000K / 4.000K / 5.000K		
Lumens	858 lm / 880 lm		1.210 lm / 1.280 lm		1.700 lm / 1.780 lm / 1.800		
Code	3.000K	140L026L	3.000K	3477	3.000K	3904	
	4.000K	140L0261L	4.000K	3478	4.000K	3905	
					5.000K	3906	
	IP 20 | 120°		IP 40 | 360° | DIMM		IP 40 | 160°		

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 50/60 Hz | +40°C -20°C | 6/30

HQI tubular E27





HQI tubular G12





HQI tubular RX7S





Technical Information

	HQI tubular E27	HQI tubular G12	HQI tubular RX7S
Power	10W	10W	13W
Color Temperature	3.000K / 4.000K	3.000K / 4.000K	3.000K / 4.000K
Lumens	1.000 lm / 1.030 lm	1.000 lm / 1.030 lm	1.320 lm / 1.375 lm
Code	3.000K 3570	3.000K 592063-G12/3	3.000K 592063-TC
	4.000K 3571	4.000K 592063-G12/4	4.000K 592063-TF
	10/50	10/50	6/30

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C



Conditions

INTERNET UPDATE - PDF

Our interest in new solutions and for the development of lighting technology and lighting industry, we are constantly innovating. This is why BENEITO FAURE offers to its customers a frequently online updated PDF to inform about all our news.

You can find all the information on our website:

www.beneito-faure.com

IMPORTANT:

All information on the website can be cancelled and replaced by another one, and will be the last update the only right one.

For this reason is very important to visit our web.

ACTUALIZACIÓN DIGITAL – PDF

Nuestra implicación desde BENEITO FAURE por una continua elaboración de soluciones avanzadas, junto al progresivo cambio tecnológico de la industria de la iluminación en los últimos años, nos hace estar en constante innovación.

Por ello, ponemos al servicio de todos nuestros clientes una actualización frecuente on-line (formato PDF) con la intención de tenerlos informados en todo momento de las últimas novedades de BENEITO FAURE.

La mencionada actualización se encuentra disponible en nuestra página WEB:

www.beneito-faure.com

IMPORTANTE:

Cualquier información publicada quedará anulada y sustituida por la que aparece en cada momento en nuestra WEB, siendo esta la única con validez y vigencia de gama y precios de venta recomendados.

Por ello, desde Beneito Faure recomendamos a todos nuestros clientes visiten nuestra página web.

GENERAL CONDITIONS OF SALE

BENEITO FAURE S.L reserves the right to make the variations it deems appropriate to its products, not being responsible for the possible erroneous information that appears in the catalog.

RATE

For any type of order the rate and conditions in force at the time of receipt of the order will apply. The rate will be sent via email to all customers in the BENEITO FAURE database and will be updated whenever necessary. Prices do not include VAT if recycling rate.

ORDERS

Orders must be sent via email. No order will be placed by phone or any other means. The quote of the material to be made to measure will be sent to the customer for acceptance and will not be processed prior receiving the copy signed for acceptance.

RETURNS

To make any return, the authorization must be requested from BENEITO FAURE. The return of the material must be communicated by e-mail indicating the customer's name, the reason of the return, the date of purchase, the number of units and the reference of the product to be returned. It is mandatory to attach a copy of the purchase invoice. The acceptance of the return does not imply the definitive acceptance of it. The return will be definitive only after the subsequent verification and analysis of the product by our technical department. Returns of merchandise will only be accepted if in perfect condition for sale and in the original packaging in good condition. The packaging label must also be intact. Returns will not be compensated by an economic amount and must be sent by means of the client's transport. The return of material may be compensated by prior order and with the authorization of BENEITO FAURE. The return of the products made to measure or previously processed by the technical department due to the customer's request, will not be accepted.

TRANSPORT

Unless other transport terms are agreed, the merchandise will travel on behalf of those purchased with the EXWORKS conditions. Likewise, BENEITO FAURE will offer a delivery time for each territory, this being always approximate. The company will not be responsible for possible alterations or delays on this time caused by causes outside the company.

DELIVERY TERM

The availability terms offered by BENEITO FAURE are always approximate and may be subject to variations. These possible variations in the terms will not imply the acceptance of the responsibility or penalties for the delay by BENEITO FAURE.

CLAIMS

On the delivery note of the carrier, any visible anomaly must be recorded and, after having reviewed the material, communicate in writing to our offices the incident within 24 hours of receiving the merchandise. Once this time has elapsed, the company will not be able to take charge of the claim because it is not in time for the transport agency. For other types of claims, you must contact our offices by written email. The product that does not work correctly will be replaced by the same article or another with the same characteristics. In no case will we be responsible for the costs of labor that may be caused by the malfunction of a product in our catalog.

WARRANTY

BENEITO FAURE guarantees that the products sold are in perfect condition. The warranty will cover the repair or replacement of the product (under the decision of BENEITO FAURE) and it will be necessary to send the incident by email. The product warranty is in its packaging. The technical department of BENEITO FAURE will be the only one authorized to determine if it is a manufacturing defect, after receiving the incident and the sales invoice in writing for prior verification. B E N E I T O FAURE quantifies the warranty time considering the date of the customer's purchase invoice and not on the hours of operation of the product.

The WARRANTY will not be covered:

1. If the product has been previously handled.
2. It is not installed according to the instructions.
3. If the ventilation of which is not adequate.
4. Problems with partial or total payment by the client.

JURISDICTION

In any discrepancy or dispute, both parties will submit to the jurisdiction of the Judges and courts of Barcelona.

PROPERTY RESERVATION

BENEITO FAURE reserves the right to own all the materials that it supplies until the buyer has paid the total amount thereof.

The requested goods are supplied under reservation of ownership in favor of BENEITO FAURE

The client is obliged to cooperate and take all steps necessary or desirable, and to propose or need to BENEITO safeguard their ownership of the goods. The serve of domain remains even in the event that the client had accepted and recognized credits against BENEITO or had established a system of accounts between them. The transformation or improvement of goods on which BENEITO has reserve domain, does not give property to client or manipulative. In case of union, transformation and/or accession of goods under domain's reserve to thirds, subsist the domain's reserve in proportion to the value that the goods subject had to domain's reserve before to accession. The client may sell the goods subject to domain's reserve in the ordinary course of business, provided those no breach his payment obligations to BENEITO. Upon a resale of goods subject to domain's reserve, occurs automatically the transfer to BENEITO of credits arising of that sale to the seller, and any other credit arising in the case of compensation for loss of thing, tort-contract, etc. in such cases, the client is obliged to BENEITO to provide all information and documentation necessary for the claim of the subrogated credits. In case of default by the client, in particular, in the case of late payment, or if a declaration of bankruptcy of the client, BENEITO claim by notifying the client, in possession of the goods, being obligated to BENEITO to provide all information and documentation necessary for the claim of the subrogated credits. In case of default by the client, in particular, in the case of late payment, or if a declaration of bankruptcy of the client, BENEITO claim by notifying the client, in possession of the goods, being obliged it to give them. If before performed the pay of total price, the goods sold were affected by some lien or lock, the client shall be obliged to sate explicitly in the diligence of the embargo, that the goods are owned by BENEITO and if, despite this, were seized, must facilitate to BENEITO the exercise by the relevant third domain action, whose expenses will be paid by the client.

CONDITIONS GÉNÉRALES DE VENTE

BENEITO FAURE S.L. se réserve le droit de faire les variations qu'elle juge appropriées à ses produits n'étant pas responsable de toute information erronée qui apparaît dans le catalogue.

TARIF

Pour tout type de commande, nous appliquerons les tarifs et conditions en vigueur au moment de la réception de la commande. Le tarif sera envoyé par e-mail à tous les clients qui sont dans la base de données de BENEITO FAURE et sera mis à jour si nécessaire. Les prix n'incluent pas la TVA.

COMMANDES

Les commandes doivent être envoyées par EMAIL. Aucune commande ne sera passée par téléphone ou par tout autre moyen. Les devis de matériel qui doit être manipulé sur mesure seront soumis au client pour validation et ne seront pas traités avant de recevoir la copie signée du bon pour accord.

RETOURS

Pour tout retour, une autorisation préalable doit être demandée à BENEITO FAURE. Il faudra communiquer le motif du retour par courrier électronique en indiquant le nom du client, la date d'achat, les unités et la référence du produit retourné, le motif du retour et le bon de livraison concerné. L'acceptation du retour n'implique pas l'acceptation définitive de celui-ci. Le retour ne sera définitif qu'après vérification et analyse du produit par notre service technique. Les retours de marchandises ne seront acceptés que si le matériel est en parfait état pour la vente et dans son emballage d'origine en bon état, ainsi que l'étiquette de l'emballage.
Les retours ne seront pas compensés par un montant économique et ils devront être envoyés par le biais du transport du client. Le retour du matériel peut être compensé au moyen d'une commande préalable et avec l'autorisation de BENEITO FAURE. Nous n'accepterons pas les retours de produits de fabrication spéciale ou préalablement manipulés par le service technique à la demande du client.

TRANSPORT

Sauf convention contraire, les marchandises voyagent pour le compte de ceux qui achètent aux conditions EXWORKS. De même, BENEITO FAURE proposera un délai de livraison pour chaque territoire, toujours approximatif. La société ne sera pas responsable d'éventuelles modifications ou retards sur ce délai produits par des causes externes à la société.

TEMPS DE LIVRAISON

Les périodes de disponibilité offertes par BENEITO FAURE sont toujours approximatives et peuvent faire l'objet de variations. Ces éventuelles variations de conditions n'impliquent pas l'acceptation de responsabilité ou de pénalités de retard de la part de BENEITO FAURE.

RÉCLAMATIONS

Le bon de livraison du transporteur doit mentionner toute anomalie visible et, après examen du matériel, communiquer par écrit à nos bureaux l'incident dans les 24 heures suivant la réception des marchandises. Passé ce délai, l'entreprise ne pourra pas prendre en charge la réclamation pour ne pas être dans le délai par l'agence de transport. Pour les autres types de réclamations, vous devez communiquer par écrit à nos bureaux. Le produit qui ne fonctionne pas correctement sera remplacé par un autre égal ou qui remplit les mêmes caractéristiques. En aucun cas nous ne prendrons en charge les coûts de main d'œuvre qui peuvent être occasionnés par le dysfonctionnement d'un produit de notre catalogue.

GARANTIE

BENEITO FAURE garantit que les produits vendus sont en parfait état. La garantie couvrira la réparation ou le remplacement du produit (à la discrétion de BENEITO FAURE) et il sera nécessaire d'envoyer l'incident par email. La garantie du produit se trouve sur l'emballage du produit. Le service technique de BENEITO FAURE sera le seul autorisé à déterminer s'il s'agit d'un défaut de fabrication, après avoir reçu par écrit l'incidence et la facture de vente pour vérification préalable. BENEITO FAURE base la période de garantie sur les années écoulées depuis l'achat du produit par le client, et non sur les heures d'utilisation du produit.

La GARANTIE ne sera pas couverte :

1. Si le produit a déjà été manipulé.
2. N'a pas été installé conformément aux instructions.
3. Si la ventilation n'est pas suffisante.
4. Problèmes de paiement partiel ou total par le client.

JURIDICTION

En cas de désaccord ou de litige, les deux parties se soumettront à la juridiction des juges et tribunaux de Barcelone.

RÉSERVE DE PROPRIÉTÉ

BENEITO FAURE se réserve la propriété de tous les matériaux qu'elle fournit jusqu'au paiement intégral par l'acheteur.

La marchandise commandée est livrée sous réserve de propriété en faveur de BENEITO FAURE jusqu'à l'exécution complète des obligations de paiement du client.

Le client est tenu de coopérer et de prendre les mesures nécessaires et celles que BENEITO FAURE propose pour préserver sa propriété des marchandises. La réservation du domaine persiste même si le client a accepté et reconnu des crédits sur BENEITO FAURE ou si un système de comptes courants a été établi entre eux. La transformation ou l'amélioration de la marchandise sur laquelle BENEITO FAURE a une réserve de propriété ne confère pas sa propriété au client ou au manipulateur. Toute supposition d'union, de transformation et/ou d'adhésion des produits sous la réserve de dominion aux produits de tiers subsistera la réserve de dominion dans la proportion correspondant à la valeur qui avait les produits objet de la réserve de dominion avant l'adhésion. Le client peut vendre la marchandise sous réserve de propriété dans le cours normal de ses affaires, à condition qu'il n'ait pas manqué à ses obligations de paiement envers BENEITO FAURE. En tout état de cause, en cas de revente de marchandises sous réserve de propriété, il y a cession de plein droit à BENEITO FAURE des crédits nés de cette revente en faveur du vendeur, ainsi que de tous autres crédits antérieurs, en cas d'indemnisation pour perte de la chose, responsabilité civile, etc. Dans ces cas, le client sera tenu de fournir à BENEITO FAURE toutes les informations et documents nécessaires à la réclamation des crédits subrogés. En cas de non-respect de la part du client, et notamment en cas de retard de paiement ou de déclaration de faillite du client, BENEITO FAURE se réserve le droit de réclamer, moyennant notification préalable au client, la possession des marchandises, le client étant tenu de les lui livrer. Si, avant le paiement intégral du prix, les marchandises vendues font l'objet d'une saisie ou d'un empêchement, le client est tenu de déclarer expressément, dans le cadre de la saisie, que les marchandises sont prioritaires pour BENEITO FAURE et si, malgré cette déclaration, elles sont saisies, BENEITO FAURE pourra exercer l'action correspondante du tiers, dont les frais seront à charge du client.

CONDIZIONI GENERALI DI VENDITA

BENEITO FAURE S.L. si riserva il diritto di realizzare le variazioni che considera opportune sui proprio prodotti non essendo responsabile di possibili informazioni errate che possono apparire nel catalogo.

LISTINO PREZZI

Per qualsiasi ordine si applicano le condizioni di vendita in vigore al momento della ricezione dello stesso.Il listino prezzi e' inviato tramite mail a tutti i clienti inseriti nel data base di BENEITO FAURE e puo' essere aggiornato in qualsiasi momento se necessario.I prezzi sono da intendersi IVA esclusa. Tassa di riciclaggio inclusa.

ORDINI

Gli ordini devono essere inviati esclusivamente tramite mail. Non sara' processato nessun ordine via telefono o tramite altri mezzi. I preventivi del materiale che deve essere fatto su misura saranno inviati al cliente per accettazione e non saranno elaborati fino al ricevimento della copia firmata per accettazione.

RESI

Per procedere con qualsiasi reso e' necessario ricevere l'autorizzazione di BENEITO FAURE. Il motivo del reso deve essere comunicato tramite e-mail indicando il nome del cliente, la data di acquisto, le unità ed il riferimento del prodotto da rendere. È obbligatorio allegre sempre la copia della fattura d'acquisto. L'accettazione del reso non implica l'accettazione definitiva dello stesso. Il reso sarà definitivo solo dopo la successiva verifica ed analisi del prodotto da parte del nostro ufficio tecnico. I resi di merce saranno accettati solo se in perfette condizioni per la vendita e nella confezione originale in buone condizioni. Anche l'etichetta dell'imballo deve essere integra..I resi non vengo rimborsati e devo essere spediti unicamente dal cliente all'azienda. I resi vengono compensati con articoli sostitutivi tramite autorizzazione di BENEITO FAURE. Non saranno accettati resi di prodotti fatti su misura o precedentemente trattati dall'ufficio tecnico su richiesta del cliente.

CONSEGNA

A meno che non si accordino speciali condizioni e termini, il trasporto è a carico del destinatario: EX-WORKS. Alternativamente BENEITO FAURE dispone di un servizio di consegna per ogni territorio e la resa ed il presso variano a seconda della destinazione. L'azienda non si fa carico di eventuali danni o alterazioni subiti dalla merce durante il trasporto non imputabili dall'azienda stessa.

TEMPI DI CONSEGNA

I tempi di consegna offerti da BENEITO FAURE sono sempre approssimati e possono essere soggetti a variazioni. Queste possibili variazioni non implicano l'accettazione di eventuali responsabilità o penalizzazioni subite a cause del ritardo di BENEITO FAURE.

RECLAMI

Nel documento di trasporto dell'autista deve essere segnalata qualsiasi visibile anomalia. Deve essere effettuato il controllo della merce e segnalato all'azienda entro e non oltre le 24 ore dalla ricezione. Superato questo tempo, l'azienda non si fara' carico del reclamo per il ritardo dovuto all'agenzia di trasporto. Qualsiasi altro reclamo dovra' essere trasmesso in forma scritta all'azienda. Il prodotto non funzionante sara' sostituito con il corrispettivo uguale o che presenti le medesime caratteristiche. In nessun caso l'impresa si fara' carico dei costi sostenuti per il mal funzionamento di un prodotto del nostro catalogo.

GARANZIA

Beneito Faure garantisce che i prodotti vengono venduti in perfetto stato.La garanzia copre la riparazione o la sostituzione del prodotto (sotto conferma di BENEITO FAURE) ed e' necessario l'invio della contesazione via mail.La garanzia del prodotto si trova all'interno dell'imballo.Il dipartimento tecnico di BENEITO FAURE sara' l'unico autorizzato a determinare se si tratta di un difetto di fabbricazione, dopo aver ricevuto in forma scritta la contestazione e la fattura di vendita per poter verificare l'effettivo periodo di garanzia. B E N E I T O F A U R E quantifica il tempo di garanzia considerando la data della fattura di acquisto del cliente e non sulle ore di funzionamento del prodotto.

La GARANZIA non sara' valida se:

1. Il prodotto viene manomesso o manipolato
2. Il prodotto non e' installato come da istruzioni
3. La ventilazione del prodotto non e' adeguata
4. Il cliente ha problemi con i pagamenti, sia in forma parziale che totale.

FORO DI COMPETENZA

In qualunque caso di discrepanza o controversia, ambe le parti si dovranno riferire al foro di competenza dei Giudici e del Tribunale di Barcellona.

DIRITTO DI PROPRIETÀ

BENEITO FAURE si riserva il diritto e la proprietà di tutto il materiale che somministra fino al momento in cui il cliente finale abbia totalmente pagato il materiale stesso.

La merce si somministra sotto la riserva di propriertà di BENEITO FAURE fino al totale adempimento delle obbligazioni da parte del cliente.

Il cliente è obbligato a cooperare e adottare tutte le misure necessarie o convenienti e quelle proposte da BENEITO FAURE per salvaguardare la sua proprietà del prodotto.La riserva di proprietà persiste anche quando viene accettato e riconosciuto il credito del cliente da BENEITO FAURE o se si fosse stabilito un sistema di pagamento tra le parti. Le trasformazioni o i miglioramenti della merce sulla quale BENEITO FAURE ha la riserva di proprietà, non assegnano la proprietà al cliente o al manipolatore.In caso di unione, trasformazione e/o adesione dei prodotti sotto la di proprieta' di terzi sussisterà la riserva di proprietà in proporzione al valore che avevano i prodotti oggetto di riserva di proprietà prima dell'adesione. Il cliente potrà vendere i beni soggetti a riserva di proprietà nell'ambito dei suoi affari, sempre e quando non ci siano violazioni delle obbligazioni nei confronti di BENEITO FAURE.In tutti i casi quando si genera una rivendita di merce soggetta a diritto di proprietà, si genera automaticamente la cessazione a BENEITO FAURE dei crediti conseguenti alla rivendita in favore del venditore, cosi come si qualsiasi altro credito precedente, nel suo caso di indennizzo per perdita della cosa, responsabilità extra-contrattuale, ecc.Il cliente sarà obbligato in questo caso a fornire a BENEITO FAURE tutte le informazioni e i documenti necessari per i reclami. BENEITO FAURE reclamerà, previa notifica del cliente in possesso della merce, essendo quest'ultimo obbligato a fornirla. Se prima di effettuare il pagamento totale , la merce venduta fosse soggetta a qualsiasi tipo di sequestro o blocco, il cliente sarà obbligato a dichiarare nel documento di sequestro che la merce è proprietà di BENEITO FAURE e se, indipendentemente da questo la merce fosse sequestrata, il cliente deve supportare BENEITO FAURE alla rivalsa del diritto di proprietà le cui spese saranno a carico del cliente.

ALLGEMEINE GESCHÄFTSBEDINGUNGEN

BENEITO FAURE S.L behält sich das Recht, etwaige, für erforderlich gehaltene Änderungen an den Produkten vorzunehmen, und ist nicht für mögliche Fehlinformationen im entsprechenden Katalog haftbar.

PREISLISTE

Alle Bestellungen unterliegen der zum Zeitpunkt der Bestellung geltenden Preisliste und den entsprechenden Geschäftsbedingungen. Die Preisliste wird per E-Mail an alle Kunden, die sich in der Datenbank von BENEITO FAURE befinden, geschickt und wird, wenn erforderlich, entsprechend aktualisiert werden. Die Preise enthalten weder die Mehrwertsteuer noch die Recyclinggebühr.

BESTELLUNGEN

Bestellungen müssen per E-Mail geschickt werden. Es werden keine Bestellungen telefonisch oder auf sonstigem Wege entgegengenommen. Der Kostenvoranschlag bzw. das Angebot für das nach Kundenvorgaben anzufertigende Produkt, wird dem Kunden zur Prüfung und zur Freigabe zugesandt und wird erst nach Erhalt der geprüften Auftragsfreigabe bearbeitet.

RÜCKGABEN

Alle Rückgaben müssen vorab bei BENEITO FAURE beantragt und von der Firma genehmigt werden. Die Rücksendung-Anfrage des Materials muss per E-Mail unter Angabe des Kundennamens, des Grundes der Rücksendung, des Kaufdatums, der Anzahl der Einheiten und der Referenz des zurückzusendenden Produkts erfolgen. Es ist zwingend erforderlich, eine Kopie der Kaufrechnung beizufügen. Die Annahme der Rücksendung bedeutet nicht die endgültige Annahme. Die Rücksendung ist erst nach der anschließenden Überprüfung und Analyse des Produkts durch unsere technische Abteilung endgültig. Warenrücksendungen werden nur akzeptiert, wenn sie sich in einwandfreiem Zustand zum Verkauf und in der Originalverpackung in gutem Zustand befinden. Das Verpackungsetikett muss ebenfalls intakt sein. Rückgaben werden nicht durch einen Geldbetrag ausgeglichen und müssen vom Kunden mit eigenen Transportmitteln geschickt werden. Die Materialrückgabe kann, nach Genehmigung von BENEITO FAURE, durch eine Vorbestellung ausgeglichen werden. Die Rücksendung der nach Maß gefertigten oder zuvor von der technischen Abteilung auf Kundenwunsch gefertigten Produkte wird nicht akzeptiert.

TRANSPORT

Außer im Falle von gesondert vereinbarten Transportbedingungen, wird die Ware unter ex-works Bedingungen zu Lasten des Käufers versendet werden. BENEITO FAURE wird die Lieferzeiten stets dem Empfangsort entsprechend angeben, wobei es sich immer um annähernde Zeiten handeln wird. Das Unternehmen ist nicht für etwaige Änderungen oder Verspätungen haftbar, die sich aus Gründen, die nicht vom Unternehmen zu verantworten sind, ergeben.

DLIEFERZEIT

Die von BENEITO FAURE genannten Lieferzeiten und Verfügbarkeiten verstehen sich immer als ca. Angaben und können Änderungen unterliegen. Diese möglichen Änderungen der Lieferzeiten bedeuten nicht die Anerkennung der Verantwortung oder die Auferlegung einer Strafe als Folge des Verzugs durch BENEITO FAURE.

REKLAMATIONEN

Jegliche sichtbaren Mängel müssen auf dem Lieferschein des Transportunternehmens eingetragen werden. Nach Prüfung der Ware, müssen etwaige Vorfälle unserer Firma innerhalb der nächsten 24 Stunden schriftlich mitgeteilt werden. Nach dieser Frist übernimmt die Firma keine Haftung für Reklamationen, da die vom Transportunternehmen vorgeschriebene Frist abgelaufen ist. Im Falle sonstiger Reklamationen müssen diese unserer Verwaltung schriftlich mitgeteilt werden. Produkte, die nicht korrekt funktionieren, werden durch gleiche Produkte, oder Produkte mit den gleichen Eigenschaften, ersetzt. In keinem Fall werden wir die Arbeitskosten übernehmen, die sich aus der Fehlfunktion eines Produkts aus unserem Katalog ergeben könnten.

GARANTIE

BENEITO FAURE garantiert, dass die verkauften Produkte sich in perfektem Zustand befinden. Die Garantie deckt die Reparatur oder den Ersatz des Produkts (nach Entscheidung von BENEITO FAURE). Der Fall muss jedoch vorab per E-Mail angezeigt werden. Die Produktgarantie befindet sich in der Produktverpackung.Die technische Abteilung von BENEITO FAURE ist die einzige autorisierte Stelle, um die Entscheidung zu treffen, ob es sich um einen Herstellungsfehler handelt, nachdem der Fall schriftlich gemeldet wurde, samt Rechnung, zur entsprechenden Prüfung.
BENEITO FAURE bewertet die Garantiezeit unter Berücksichtigung des Datums der Kaufrechnung des Kunden und nicht anhand der Betriebsstunden des Produktes.

Die GARANTIE gilt nicht:

1. Wenn das Produkt manipuliert wurde.
2. Wenn das Produkt nicht gemäß Anleitungen installiert wurde.
3. Wenn die Produktbelüftung nicht geeignet ist.
4. Wenn Probleme für die teilweise oder vollständige Zahlung durch den Kunden vorliegen.

GERICHTSBARKEIT

Im Falle etwaiger Uneinigkeiten oder Streitfälle, werden sich beide Parteien der Gerichtsbarkeit der Richter und Gerichte von Barcelona unterwerfen.

EIGENTUMSVORBEHALT

BENEITO FAURE behält sich das Eigentumsrecht auf alle gelieferten Materialien, bis der Käufer den gesamten Kaufbetrag beglichen hat.

Die bestellten Waren werden unter Eigentumsvorbehalt zu Gunsten von BENEITO geliefert, bis der Kunde allen ahlungsverpflichtungen nachgekommen ist. Der Kunde verpflichtet sich, zu kooperieren und alle notwendigen oder angemessenen Maßnahmen und solche Maßnahmen, die BENEITO vorschlägt oder benötigt, zu ergreifen, um sein Eigentum über die Ware zu schützen. Der Eigentumsvorbehalt besteht selbst dann weiter, wenn der Kunde akzeptierte und anerkannte Forderungen gegenüber BENEITO hätte, oder wenn ein System laufender Konten zwischen beiden Parteien bestünde. Die Transformation oder Verbesserung der Ware für die BENEITO einen Eigentumsvorbehalt hat, überträgt sein Eigentum nicht an den Kunden oder den Anwender. Im Falle von Zusammenführung, Transformation und/oder Beistellung von Produkten unter Eigentumsvorbehalt mit Produkten von Dritten besteht der Eigentumsvorbehalt in Proportion entsprechend dem Wert, den die Produkte mit Eigentumsvorbehalt vor der Beistellung hatten, fort. Der Kunde kann die Waren unter Eigentumsvorbehalt im Rahmen seiner gewöhnlichen Geschäfte verkaufen, solange er seinen Zahlungsverpflichtungen gegenüber BENEITO nachkommt. In jedem Fall erfolgt bei einem Wiederverkauf der Waren unter Eigentumsvorbehalt automatisch eine Abtretung der aus diesem Wiederverkauf entstehenden Forderungen zugunsten des Verkäufers an BENEITO, sowie eine Abtretung aller anderen Forderungen, die ggf. als Entschädigungen durch Warenverlust, außervertragliche Haftung usw. entstehen. Der Kunde ist in diesen Fällen dazu verpflichtet, BENEITO alle für die Reklamation der übertragenen Forderungen notwendigen Informationen und Unterlagen zur Verfügung zu stellen. Im Falle einer Nichteinhaltung seitens des Kunden, und insbesondere im Fall von verspäteten Zahlungen oder Konkurserklärung seitens des Kunden, reklamiert BENEITO als Eigentümer der Ware, nach vorheriger Mitteilung an den Kunden, die Zurückgabe der Ware seitens des Kunden. Sollte die verkaufte Ware vor der vollständigen Bezahlung des Preises Gegenstand von Pfändung oder Handelshemmnis werden, ist der Kunde verpflichtet, bei der Pfändungsmaßnahme ausdrücklich darauf hinzuweisen, dass die Waren Eigentum von BENEITO sind und, sollten sie trotz dieser Erklärung gepfändet werden, die Durchführung des entsprechenden Drittwiderspruchs, dessen Kosten zu Lasten des Kunden gehen, seitens BENEITO zu ermöglichen.

CONDICIONES GENERALES DE VENTA

BENEITO FAURE S.L se reserva el derecho a realizar las variaciones que considere oportunas a sus productos no siendo responsables de la posible información errada que aparezca en dicho catálogo.

TARIFA

Para cualquier tipo de pedido se aplicará la tarifa y condiciones vigentes en el momento de la recepción del pedido. La tarifa se enviará vía email a todos los clientes que se encuentren en la base de datos de BENEITO FAURE y será actualizada siempre que sea necesario. Los precios no incluyen IVA ni tasa de reciclaje.

PEDIDOS

Los pedidos deberán ser enviados vía email. No se cursará ningún pedido por teléfono o cualquier otra vía. Los presupuestos de material que se deba manipular a medida se enviarán al cliente para su aceptación y no se cursaran hasta recibir la copia firmada de la aceptación.

DEVOLUCIONES

Para realizar cualquier devolución se deberá solicitar la autorización previa a BENEITO FAURE. Deberá comunicarse el motivo de la devolución vía email indicando el nombre del cliente, fecha de compra, unidades y referencia del producto devuelto, motivo de la devolución y albarán de compra. La aceptación de la devolución no implica la aceptación definitiva de ésta. Dicha devolución solo será definitiva tras la consiguiente verificación y análisis del producto por parte de nuestro departamento técnico. Solo serán aceptadas las devoluciones de mercancía si ésta se encuentra en perfecto estado para su venta y en su embalaje original en buen estado, así como la etiqueta de embalaje. Las devoluciones no serán compensadas mediante un importe económico. La devolución de material podrá ser compensada mediante un pedido previo y con la autorización de BENEITO FAURE. No se aceptarán devoluciones de productos de fabricación especial o previamente manipulados por parte del departamento técnico bajo petición del cliente.

TRANSPORTE

Salvo que se acuerden otros términos de transporte, la mercancía viajará por cuenta de los comprados con las condiciones EXWORKS.
Así mismo, BENEITO FAURE ofrecerá un tiempo de entrega por cada territorio, siendo éste siempre aproximado. La empresa no se hará cargo de posibles alteraciones o demoras sobre éste tiempo producidas por causas externas a la empresa.

PLAZO DE ENTREGA

Los plazos y disponibilidad ofrecidos por BENEITO FAURE son siempre aproximados y pueden estar sujetos a variaciones. Éstas posibles variaciones en los plazos no supondrán la aceptación de la responsabilidad o penalizaciones por la demora por parte de BENEITO FAURE.

RECLAMACIONES

En el albarán del transportista deberá constar cualquier anomalía visible y, tras haber revisado el material, comunicar por escrito a nuestras oficinas la incidencia en las 24 horas siguientes a la recepción de la mercancía.
Superado este tiempo, la empresa no podrá hacerse cargo de la reclamación por no estar en el plazo por la agencia de transporte.
Para otro tipo de reclamaciones, deberá comunicarse por escrito a nuestras oficinas.
El producto que no funcione correctamente será repuesto por otro igual o que cumpla con las mismas características. En ningún caso nos haremos cargo de los costes de la mano de obra que se pueda originar por el mal funcionamiento de un producto de nuestro catálogo.

GARANTÍA

BENEITO FAURE garantiza que los productos que se venden se encuentran en perfecto estado. La garantía cubrirá la reparación o la reposición del producto (bajo decisión de BENEITO FAURE) y será necesario el previo envío de la incidencia por email. La garantía del producto se encuentra en el embalaje del mismo. El departamento técnico de BENEITO FAURE será el único autorizado para determinar si se trata de un defecto de fabricación, después de recibir por escrito la incidencia y la factura de venta para previa verificación. BENEITO FAURE basa el tiempo de garantía en los años desde que el producto fue comprado por el cliente, no en las horas de funcionamiento de éste.

La GARANTÍA no se cubrirá:
1. Si el producto ha sido previamente manipulado.
2. No se encuentra instalado según las instrucciones.
3. Si la ventilación del cuál no es la adecuada.
4. Problemas de pago parcial o en su totalidad por parte del cliente.

JURISDICCIÓN

En cualquier discrepancia o disputa, ambas partes se someterán a la jurisdicción de los Jueces y tribunales de Barcelona.

RESERVA DE LA PROPIEDAD

BENEITO FAURE se reserva el derecho a la propiedad de todos los materiales que suministre hasta que el comprador haya hecho efectivo el pago del total de los mismos.

Las mercancías pedidas se suministran bajo reserva de dominio en favor de BENEITO FAURE hasta el total cumplimiento de las obligaciones de pago del cliente.

El cliente queda obligado a cooperar y adoptar las medidas que sean necesarias y las que BENEITO FAURE le proponga para salvaguardar su propiedad sobre la mercancía. La reserva del dominio persiste incluso en el supuesto de que el cliente tuviera créditos aceptados y reconocidos contra BENEITO FAURE o se hubiera establecido un sistema de cuentas corrientes entre ambos. La transformación o mejora de la mercancía sobre la que BENEITO FAURE tiene reserva de dominio no otorga su propiedad al cliente o manipulador. En el supuesto de unión, transformación y/o accesión de los productos bajo la reserva de dominio a productos de terceros subsistirá la reserva de dominio en la proporción correspondiente al valor que tuvieran los productos objeto de reserva de dominio con anterioridad a la accesión. El cliente podrá vender los bienes sujetos a la reserva de dominio en el curso ordinario de sus negocios, siempre y cuando no haya incumplido sus obligaciones de pago frente a BENEITO FAURE. En todo caso al producirse una reventa de mercancías sujetas a reserva de dominio, se produce automáticamente la cesión a BENEITO FAURE de los créditos nacidos en consecuencia de dicha reventa en favor del vendedor, así como de cualesquiera otros créditos precedentes, en su caso de indemnizaciones por perdida de la cosa, responsabilidad extracontractual, etc. El cliente estará obligado en estos supuestos a facilitar a BENEITO FAURE toda la información y documentación necesaria para la reclamación de los créditos subrogados. En caso de incumplimiento por parte del cliente, y en particular, en el supuesto de retraso en los pagos o en caso de declaración de concurso del cliente, BENEITO FAURE reclamará, previa notificación al cliente, en posesión de las mercancías, estando obligado éste a entregárselas. Si antes de efectuado el total pago del precio, las mercancías vendidas fuesen objeto de cualquier embargo o traba, el cliente vendrá obligado a hacer constar expresamente en la diligencia del embargo, que las mercancías son prioridad de BENEITO FAURE y si, a pesar de esta manifestación, fuesen embargados, facilitará el ejercicio por parte de la BENEITO FAURE de la correspondiente acción de tercería de dominio, cuyos gastos correrán por parte del cliente.

Alphabetical Index (Name - Page)

Adapter 3PH	347
Adn G4	761
Air recessed	489
Alfa 3PH	383
Alp 3PH suspension	350
Alp 48V	415
Alp 48V suspension	415
Alp space	547
Alp surface	509
AR111 15° G53	740
AR111 15° GU10	740
Argo recessed	453
Argo XL recessed	453
Aria 30W E27 / E40	755
Aria 50W E27 / E40	755
Ark 3PH suspension	351
Ark space	545
Ark suspension recessed	559
Ark suspension surface	559
Artis r wall	627
Artis sq wall	627
Asti	605
Aston 3PH	371
Atmos 3PH suspension	352
Atmos GU10 3PH suspension	353
Atmos GU10 suspension	565
Atmos GU10 XL 3PH suspension	353
Atmos GU10 XL suspension	565
Atmos slim 48V IP	445
Atmos slim 48V mini	397
Atmos slim space	544
Atmos slim suspension	561
Atmos slim XL suspension	561
Atmos suspension	563
Atmos XL 3PH suspension	352
Atmos XL suspension	563
Atom recessed	455
Avant r recessed	501
Avant r surface	535
Avant sq recessed	501
Bag	607
Basculante recessed	493
Bathroom recessed	499
Beam wall	591
Bimba	609
Bit 48V IP	447
Blis r	653
Blis rect	653
Blis sq	653
Bonn recessed	491
Bora 3PH suspension	354
Bora 48V suspension	417
Bora recessed	471
Bora space	549
Bora surface	507
Bora suspension recessed	571
Bora suspension surface	571
Bora XL 3PH suspension	354
Bora XL space	549
Box 10	204
Box 11	202
Box 12	202
Box 13	203
Box 14	198
Box 15	189
Box 16	189
Box 17	190
Box 18	190
Box 19	204
Box 21	216
Box 22	212
Box 23	191
Box 24	207
Box 27	217
Box 28	223
Box 29	225
Box 30 12mm	227
Box 30 20mm	227
Box 32	211
Box 33	213
Box 34	186
Box 35	197
Box 37	205
Box 38	197
Box 39	222
Box 41	187
Box 43	194
Box 53	191
Box 57	186
Box 60	199
Box 65	219
Box 67	221
Box 68	211
Box 69	209
Box 71	198
Box 73	226
Box 74	194
Box 75	195
Box 87	193
Box 89	187
Box 92	193
Box 95	195
Box 98 railing	215
Box 99	201
Caddie	665
Cala 10W G24	765
Cala 9W G24	765
Cam	697
Cam XL	697
Casambi	328
Casambi magnet track control	413
Ceiling fixing 3PH recessed	349
Ceiling fixing 3PH surface	347
Central corner connector 48V	411
Central corner connector mini	393
Circus in	149
Circus in XL	147
Circus out	149
Circus out XL	147
Clos base	695
Clos base mini	695
Clos dual base	695
Clos dual base mini	695
Clos wall	639
Clos wall dual	639
Color time	85
Comet	649
Compac r recessed	475
Compac sq recessed	475
Concord 48V mini	403
Concord surface	513
Converse	611
Cookie 3PH	365
Cookie 3PH suspension	359
Cookie 48V	435
Cookie 48V suspension	435
Cookie space	543
Cookie suspension base	573
Crown 3PH	379
Crown base	527
Cup 45W E27 / E40	759
Curve / straight end cap 48V	411
Curve Line 48V	421
Curve magnet track 48V surface	411
Curve Tram 48V	419
Custom system accessories	176
Dali	334
Dau	131
Dau E	131
Diro 48V	423

Alphabetical Index (Name - Page)

Dis	623
Dole GU10	741
Dot 48V	433
Dual	93
Dual inserted track	93
Dumi	41
Dumi dual	43
Dynamic control	323
Eclipse recessed	493
Egna	715
Emergency	179
End cap 3PH	347
End cap 48V recessed	411
End cap 48V surface	411
End cap IP	441
End cap mini surface /recessed	393
Esférica 5,5W E14 / E27 dimm	744
Esférica 5W E14 / E27	744
Esférica 7W E14 / E27	744
Evo	45
Evo dual	49
Evo dual wall	49
Evo E	52
Evo E opal	53
Evo fly	47
Evo mini	51
Evo mini track	55
Evo R	51
Evo track	57
Fade	665
Fijo recessed	493
Filter	109
Filter line	107
Fine 20	242
Fine 25	305
Fine 25 circle 48V	437
Fine 26	243
Fine 30	257
Fine 31	244
Fine 32 N	261
Fine 34	307
Fine 36	274
Fine 37	265
Fine 41	249
Fine 42	277
Fine 43	282
Fine 44	271
Fine 45	289
Fine 46	281
Fine 47	288
Fine 48	235
Fine 49	263
Fine 50	283
Fine 51	259
Fine 52	247
Fine 54	279
Fine 55	264
Fine 56	256
Fine 60	285
Fine 61	252
Fine 63	273
Fine 64	234
Fine 66 N	286
Fine 68	250
Fine 69	241
Fine 70	311
Fine 71	287
Fine 72	313
Fine 73	316
Fine 74	315
Fine 75	260
Fine 76	253
Fine 77	309
Fine 79	251
Fine 81	275
Fine 82	245
Fine 84	239
Fine 86	267
Fine 88	262
Fine 90	268
Fine 91	269
Fine 92	246
Fine 96	255
Fine 97	237
Fine DMX-4	299
Fine DMX-5	301
Fine running	291
Fine SPI-2	293
Fine SPI-3	295
Fine SPI-4	296
Fine SPI-5	297
Fix	675
Flama dimmable E14	743
Flama E14 / E27	743
Flash	171
Flexible joint 3PH	347
Forest	91
Frame 48V IP 1m	443
Frame 48V IP 2m	443
Frame 48V IP 3m	443
Front base space	557
Gam	707
Globo 10W E27	748
Globo 10W E27 dimmable	748
Globo 15W E27	749
Globo 16W E27	749
Globo 22W E27	749
Golf surface	505
Golf XL surface	505
Grip	121
Grow	583
Hat 3PH suspension	358
Hat 48V suspension	427
Hat space	542
Hat suspension recessed	569
Hat suspension surface	569
Hook GU10	733
Hook GU10 dimmable	733
Horizon	167
HQI tubular E27	768
HQI tubular G12	768
HQI tubular RX7S	768
Ice 48V IP	449
Ice XL 48V IP	449
Icon wall	593
Ilo	581
Ina	623
Iris	717
Kaa	163
Kaa line	165
Kom 3PH 20W	381
Kom 3PH 30W	381
Kom 3PH 40W	381
Konic 3PH	371
Kora r surface	529
Kora sq surface	531
Krion 300W	693
Krion 400W	693
Kubo	95
Kubo E	95
L joint 3PH recessed	349
L joint 3PH surface	347
L joint 48V ceiling recessed	411
L joint 48V ceiling surface	411
L joint ceiling IP	441
L joint ceiling mini recessed	393
L joint ceiling mini surface	393
L joint wall 48V ceiling recessed	411
L joint wall 48V ceiling surface	411
L joint wall ceiling inner mini rece.	393

L joint wall ceiling inner mini surf. 393
L joint wall ceiling IP 441
L joint wall ceiling outer mini rece. 393
L joint wall ceiling outer mini surf. 393
Lao 579
Led strip accessories 317
Led strip control 336
Lek r wall 633
Lek sensor 631
Lek sq wall 633
Lena 3PH 377
Lievo 3PH suspension 355
Lievo space 551
Lievo XL 3PH suspension 355
Lievo XL space 551
Lift 169
Lift wall 169
Line 48V 421
Line 48V mini 405
Lineal 13W R7S 767
Lineal 9W R7S 767
Lineal tubular 11W R7S dimmable 767
Lineal tubular 5W R7S 766
Lineal tubular 9W R7S 766
Lineal tubular 9W R7S dimmable 766
Linear joint 3PH with spacing rece. 349
Linear joint 3PH with spacing surf. 347
Linear joint 3PH without spacing 347
Linear joint 48V recessed 411
Linear joint 48V surface 411
Linear joint IP 441
Linear Joint IP68 703
Linear joint mini 393
Linstra 103
Lonja 3PH 373
Lonja XL 3PH 375
Luk r recessed 497
Luk r recessed IP 497
Luk sq recessed IP 497
Luky 621
Luxor 105
Lynk G53 739
Lynk GU10 739
Lynk GU10 dimmable 739
Mac floor 699
Mac floor XL 699
Mac wall 645
Mac wall base 647
Mac wall XL 645
Madi 613
Magnet track 48V recessed 411
Magnet track 48V surface 411
Magnet track accessories 410
Magnet track mini accessories 392
Magnet track mini recessed 393
Magnet track mini surface 393
Max BA15d 764
Micro globo 6W E27 748
Micro Zoom recessed 457
Micro Zoom XL recessed 457
Mini Bora 48V 417
Mini Bora recessed 471
Mini Bora surface 507
Mini Comet 649
Mini Concord 48V mini 403
Mini Concord surface 513
Mini Golf surface 504
Mini Hat 3PH suspension 358
Mini Hat 48V suspension 427
Mini Hat space 542
Mini Hat suspension recessed 569
Mini Hat suspension surface 569
Mini Icon wall 593
Mini Kora r surface 529
Mini Kora sq surface 531
Mini Line 48V 421
Mini Line 48V mini 405
Mini Mac wall 645
Mini Oxo r recessed 465
Mini Oxo rect 2 recessed 467
Mini Oxo rect 4 recessed 467
Mini Oxo rect 6 recessed 467
Mini Oxo sq recessed 465
Mini Piccolo 48V mini 395
Mini Pla 659
Mini Rubyc surface 515
Mini Sigma 663
Mini Thessis dimm recessed 487
Mini Thessis recessed 485
Mini Tram 3PH 385
Mini Tram 48V 419
Mini Tram recessed 473
Minimus 125
Mirrow 99
Mis r wall 625
Mis sq wall 625
Motion sensor 343
Nano Alp 3PH suspension 350
Nano Alp space 547
Nano Argo flat recessed 453
Nano Golf surface 504
Nano Line 48V 421
Nano Oxo r recessed 463
Nano Oxo sq recessed 463
Nano Pulsar r / sq recessed 459
Nano Pulsar r / sq surface 459
Nano Pulsar r / sq trim 459
Nano Sigma 663
Nano Tram 48V 419
Nano Tram recessed 473
Narrow GU10 dimmable 735
Neo 641
Neo sensor 643
Neo XL 641
Neo XL sensor 643
Nexus 84
Nik 669
Nitro GU10 741
Nix 623
Noa 80W E27 / E40 760
Noa 85W E27 / E40 760
Noi dimm recessed 483
Noi recessed 483
Nox surface 533
Nyneto 123
Obo 19W E27 756
Obo 27W E27 756
Obo 36W E27 / E40 757
Obo 45W E27 / E40 757
Oculum 3PH 367
Oma 637
One GU10 wall 599
One GU10 wall dual 599
One recessed 495
One surface 535
Optic 661
Outdoor track accessories 441
Outdoor track IP 441
Oxo r dimm recessed 469
Oxo sq dimm recessed 469
Par 30 E27 753
Par 38 3.000K E27 753
Par 38 Green E27 753
Pendant lamp accessories 177
Picolo 3PH 361
Picolo 48V mini 395
Picolo AR111 3PH 363
Picolo AR111 surface 525
Picolo base 523
Picolo GU10 3PH 363

Alphabetical Index (Name - Page)

Picolo GU10 surface	525
Pl T40 E27	752
Pla	659
Pla XL	659
Plus surface	511
Polaris 100W	691
Polaris 150W	691
Polaris 200W	691
Polo	621
Popa	711
Popa XL	711
Port	583
Power GU10	738
Power GU10 dimmable	738
Power MR16	738
Power supplies 24V	340
Power supply 3PH recessed	349
Power supply 3PH surface	347
Prisma E14	742
Proa	713
Pulcom asymm trim	479
Pulcom led accessory	479
Pulcom r recessed	477
Pulcom r recessed asymm	477
Pulcom r surface	479
Pulcom sq recessed	477
Pulcom sq recessed asymm	477
Pulcom trim	479
Pulsar dimm recessed	461
Pulsar surface accessory	461
Pulsar trim	461
Pun	585
Pure wall	587
Puzzle	97
PVC trim 48V	411
Quick	129
R-39 E14	750
R-50 E14	750
R-63 E27	750
R-63 s-line GU10	737
R-80 E27	751
R-90 2.200K E27	751
R-90 3.000K E27	751
Recessed base 3PH	349
RF control	326
Rok recessed	499
Rubyc surface	515
Sair	673
Sair XL	673
Selen	651
Shop E14	742
Side base space	555
Sigma	663
Sigma XL	663
Signal	671
Sil E27	754
Skin	581
Sky 100W	689
Sky 10W	688
Sky 10W 4CCT	684
Sky 10W sensor	687
Sky 10W spike	679
Sky 10W switch	680
Sky 150W	689
Sky 200W	689
Sky 20W	688
Sky 20W 4CCT	684
Sky 20W switch	680
Sky 30W	688
Sky 30W 4CCT	685
Sky 30W sensor	687
Sky 30W switch	681
Sky 40W 4CCT	685
Sky 40W switch	681
Sky 50W sensor	687
Sky solar sensor	721
Smile 20W E27	758
Smile 40W E27	758
Smile 60W E40	758
Sono 3PH	387
Sono SL 3PH	387
Sphere 3PH suspension	360
Sphere 48V	429
Sphere 48V mini	401
Sphere 48V mini suspension	401
Sphere 48V suspension	429
Sphere alp wall	597
Sphere space	541
Sphere wall	635
Square	133
Standard 10W E27 dimmable	747
Standard 12W E27	746
Standard 12W E27 dimmable	747
Standard 15W E27	746
Standard 17W E27 dimmable	747
Standard 6W E27	745
Standard 9W E27	745
Start connector 48V	411
Start connector mini	393
Stem	617
Steps	583
Sunset r	655
Sunset sq	655
Sunset XL	657
Sunset XL dual	657
Surface base 3PH	347
Suspension kit 3PH	347
Suspension kit 48V	411
Suspension kit mini	393
Sweet usb-a	589
Sweet wall	589
System GU10	736
System GU10 dimmable	736
System MR16	736
T joint 3PH recessed	349
T joint 3PH surface	347
T joint ceiling mini recessed	393
T joint ceiling mini surface	393
T Joint IP68	703
Tao recessed	481
Tax	101
Thessis dimm recessed	487
Thessis recessed	485
Thessis SL recessed	485
Three phase track recessed	349
Three phase track recessed acc.	348
Three phase track surface	347
Three phase track surface acc.	346
Time	83
Time E	83
Time track	89
Time wall sensor	87
Tot suspension / surface	575
Tot XL suspension / surface	575
Tram 3PH	385
Tram 48V mini	405
Tram recessed	473
Tram XL recessed	473
Triton	173
Triton down	175
Tron	595
Tubi	115
Tubi mini	113
Tubi wall	119
Tubi wall mini	117
Tundra	151
Tura	701
Tura XL	701
Tutto GU10	732
Tutto MR11	732

Tuya	327
Tween recessed	629
Tween surface	629
Twist	709
Ufo Lens Dali 100W	726
Ufo Lens Dali 150W	726
Ufo Lens Dali 200W	727
Ufo Lens Dali 240W	727
Ufo Lens switch 120W/160W/200W	725
Ufo Lens switch 140W/190W/240W	725
Ufo Lens switch 60W/80W/100W	724
Ufo Lens switch 90W/120W/150W	724
Uniform-line G4	762
Uniform-line G9	763
Uniform-line GU10	734
Uniform-line GU10 dimmable	734
Uniform-line long G4	762
Uniform-line long G9	763
Uniform-line MR16	734
Urban	60
Urban 3PH	81
Urban asymmetric	73
Urban asymmetric E	73
Urban closed	81
Urban E	65
Urban emercency	61
Urban fly	69
Urban fly E	69
Urban market	79
Urban sensor casambi	61
Urban track	77
Urban train	67
Urban train E	67
Urban wall sensor	75
Urban work	71
Urban work E	71
Vision	127
Visor	615
Visor solar	719
Volt r 48V	431
Volt r base	517
Volt r GU10 base	520
Volt r3 GU10 surface	521
Volt r3 surface	519
Volt sq 48V	431
Volt sq base	517
Volt sq GU10 base	520
Volt sq3 GU10 surface	521
Volt sq3 surface	519
Waterproof silicone cover IP	443
Wech	677
X joint 3PH recessed	349
X joint 3PH surface	347
X joint ceiling mini recessed	393
X joint ceiling mini surface	393
X Joint IP68	703
Zas r	667
Zas sq	667
Zero D	136
Zero design	156
Zero design accessories	178
Zero direct	155
Zero direct XL	153
Zero in	143
Zero in XL	139
Zero out	145
Zero out XL	141
Zero Q	135
Zero T	137
Zero up & down	161
Zibor	651
Zio GU10 wall	601
Zio GU10 wall dual	601
Zio recessed	495
Zio surface	535
Zoe 3PH suspension	357
Zoe 48V mini	399
Zoe 48V mini suspension	399
Zoe 48V suspension	425
Zoe space	553
Zoe suspension recessed	567
Zoe suspension surface	567
Zoe XL 3PH suspension	357
Zoe XL space	553
Zoom 3PH	369

Numerical Index (Code - Page)

332	317	3518	749	3881	748	3995	621	4248	744	4401	688
334	317	3519	749	3882	711	3996	621	4249	744	4402	688
335	317	3520	749	3883	711	3997	621	4250	744	4410	459
336	317	3521	749	3884	711	3998	621	4251	663	4411	459
1119	202	3522	749	3885	711	3999	621	4254	688	4412	459
3364	347	3523	749	3897	349	4000	621	4266	688	4413	459
3365	347	3524	748	3898	349	4001	621	4279	688	4427	385
3366	347	3525	748	3900	760	4002	621	4280	688	4428	385
3367	347	3526	748	3901	760	4003	737	4290	671	4429	385
3368	347	3527	747	3902	760	4023	733	4291	669	4430	385
3369	347	3528	747	3903	760	4024	733	4292	669	4433	525
3370	347	3529	747	3904	767	4025	733	4295	738	4435	363
3372	347	3530	747	3905	767	4038	383	4296	738	4444	381
3372	349	3531	713	3906	767	4039	383	4297	459	4445	381
3373	347	3532	713	3909	756	4040	383	4298	459	4447	381
3438	738	3534	743	3910	756	4049	525	4299	459	4448	381
3441	738	3569	764	3911	757	4050	525	4300	459	4451	459
3442	738	3570	768	3912	757	4096	491	4301	459	4452	459
3443	738	3571	768	3913	758	4097	491	4302	459	4453	459
3444	732	3579	753	3914	758	4098	491	4303	633	4454	459
3445	732	3580	665	3915	758	4099	491	4304	633	4455	459
3446	732	3581	665	3917	756	4106	583	4308	687	4456	459
3447	732	3587	715	3918	756	4107	583	4309	687	4465	565
3448	732	3592	715	3919	757	4108	581	4310	687	4466	565
3449	732	3614	347	3920	757	4109	581	4311	687	4467	565
3450	742	3615	347	3921	757	4110	583	4312	633	4468	565
3452	739	3616	347	3922	757	4111	583	4331	661	4476	495
3453	739	3617	347	3923	757	4112	583	4340	679	4477	495
3454	739	3618	347	3924	757	4113	583	4341	679	4478	495
3455	739	3618	349	3925	758	4126	581	4349	687	4479	495
3456	739	3619	347	3926	758	4127	581	4350	687	4480	535
3457	739	3620	347	3927	758	4134	667	4351	687	4481	535
3458	347	3621	347	3929	615	4135	663	4352	687	4482	535
3459	347	3622	347	3931	615	4137	751	4353	687	4483	535
3464	739	3623	347	3948	475	4175	589	4354	687	4484	501
3465	739	3625	347	3949	475	4176	383	4355	687	4485	501
3466	739	3795	347	3950	475	4177	383	4356	687	4486	501
3467	741	3796	347	3951	475	4178	383	4362	347	4487	501
3468	741	3797	347	3952	475	4193	719	4363	347	4509	693
3469	741	3805	349	3953	475	4194	719	4364	347	4510	693
3470	741	3851	349	3955	689	4209	719	4365	347	4511	693
3477	767	3852	349	3956	689	4227	734	4367	623	4512	693
3478	767	3854	755	3957	689	4228	734	4368	623	4522	511
3485	483	3855	755	3965	760	4229	734	4369	623	4523	511
3486	483	3856	755	3983	633	4236	485	4383	593	4541	385
3489	738	3857	755	3984	633	4243	744	4384	593	4542	385
3490	738	3858	755	3985	633	4244	744	4385	593	4543	385
3491	738	3859	755	3986	633	4245	744	4386	593	4544	385
3496	717	3860	755	3987	633	4246	744	4387	593	4549	463
3497	717	3861	755	3988	633	4247	744	4388	593	4550	463

4551	463
4552	463
4566	724
4567	725
4573	417
4574	417
4575	417
4576	417
4577	417
4578	417
4579	417
4580	417
4581	417
4582	417
4583	417
4584	417
4585	417
4586	417
4587	417
4588	417
4589	471
4590	471
4591	471
4592	471
4593	471
4594	471
4595	471
4596	471
4597	471
4598	471
4599	471
4600	471
4601	471
4602	471
4603	471
4604	471
4605	571
4606	571
4607	571
4608	571
4609	571
4610	571
4611	571
4612	571
4613	571
4614	571
4615	571
4616	571
4617	571
4618	571
4619	571
4620	571
4621	507
4622	507
4623	507
4624	507
4625	507
4626	507
4627	507
4628	507
4629	507
4630	507
4631	507
4632	507
4633	507
4634	507
4635	507
4636	507
4637	411
4638	411
4639	411
4640	411
4641	411
4642	411
4643	411
4644	411
4647	411
4648	411
4649	411
4650	411
4651	411
4652	411
4653	411
4654	411
4655	411
4659	411
4660	411
4661	411
4662	411
4663	411
4664	411
4665	411
4666	411
4667	651
4668	651
4669	651
4670	651
4671	735
4672	735
4675	673
4677	749
4678	749
4679	680
4680	680
4681	680
4682	680
4683	680
4684	680
4685	681
4686	681
4687	681
4688	681
4689	681
4690	667
4691	487
4692	667
4693	667
4694	681
4700	347
4701	347
4707	410
4707	441
4708	410
4708	441
4711	410
4711	441
4725	392
4726	392
4727	392
4731	473
4735	473
4737	473
4738	473
4742	477
4743	477
4744	477
4745	477
4746	477
4747	477
4748	477
4749	477
4750	561
4751	561
4752	561
4753	349
4754	349
4755	499
4756	499
4757	499
4758	497
4759	497
4761	479
4762	479
4763	479
4764	479
4766	485
4767	487
4768	433
4769	433
4770	433
4771	433
4772	435
4773	435
4774	435
4776	419
4777	419
4778	419
4779	419
4780	419
4781	419
4782	419
4782	419
4784	421
4785	421
4786	421
4787	415
4788	415
4789	415
4790	415
4791	415
4792	415
4793	415
4794	415
4795	425
4796	425
4797	425
4798	425
4799	567
4800	567
4801	567
4802	567
4803	567
4804	567
4805	567
4806	567
4807	411
4808	559
4809	559
4810	559
4811	559
4812	559
4813	559
4814	559
4815	559
4816	559
4817	559
4818	559
4819	559
4820	675
4821	479
4822	479
4823	479
4824	479
4825	479
4826	479
4827	651
4828	651
4829	651
4830	651
4831	531
4832	529
4835	525
4836	525
4837	699
4838	699
4839	699
4840	699
4841	699
4842	699
4843	699
4844	699
4845	699
4846	699
4847	699
4848	699
4849	701
4850	701
4851	701
4852	701
4853	701
4854	701
4855	701
4856	701
4857	701
4858	701
4859	701
4860	701
4876	639
4877	639
4878	639
4879	639
4880	639
4881	639
4882	695
4883	695
4884	695
4885	695
4886	695
4887	695
4888	695
4889	695
4890	695
4891	695
4892	695
4893	695
4894	673
4895	673
4896	673
4897	673
4898	673
4899	673
4900	369
4901	369
4903	575
4905	575
4906	633
4907	633
4908	633
4909	633
4910	633
4911	633
4912	633
4913	633
4914	633
4915	726
4916	726
4917	726
4918	726
4919	727
4920	727
4921	727
4922	667
4923	665
4924	665
4930	561
4931	561
4932	561
4933	535
4934	535
4935	479

Numerical Index (Code - Page)

4946	387	5003	645	5057	461	5120	549	5210	459	5267	455
4947	387	5004	677	5058	461	5121	549	5211	459	5268	455
4950	387	5005	677	5059	461	5122	549	5212	461	5269	455
4951	387	5006	599	5060	461	5123	549	5213	461	5270	455
4954	565	5007	599	5061	465	5124	549	5214	497	5271	455
4955	565	5008	599	5062	465	5125	549	5215	497	5272	455
4956	387	5009	599	5063	467	5128	555	5216	497	5273	457
4957	653	5010	599	5064	467	5129	555	5217	497	5274	457
4958	653	5011	599	5065	467	5139	410	5218	645	5275	457
4959	653	5012	601	5066	467	5140	410	5219	645	5276	457
4960	653	5013	601	5067	467	5147	724	5220	645	5277	457
4961	653	5014	601	5068	467	5148	724	5221	379	5278	457
4962	653	5015	601	5069	515	5149	725	5222	379	5279	457
4963	349	5016	601	5070	515	5150	725	5224	527	5280	457
4964	349	5017	601	5071	513	5154	613	5225	527	5281	457
4965	349	5018	489	5072	513	5155	589	5226	645	5282	457
4966	349	5019	483	5073	649	5156	589	5227	645	5283	457
4967	349	5020	625	5074	649	5157	591	5228	645	5284	457
4968	349	5021	625	5075	649	5158	591	5229	645	5285	504
4969	349	5022	625	5076	649	5159	587	5230	645	5286	504
4970	349	5023	625	5084	549	5160	587	5231	645	5287	504
4971	349	5024	625	5085	549	5178	707	5232	645	5288	504
4972	349	5025	625	5086	549	5179	365	5233	645	5289	504
4973	349	5027	579	5087	549	5180	365	5234	645	5290	504
4974	349	5028	627	5088	551	5181	435	5235	645	5291	504
4975	349	5029	585	5089	551	5182	435	5236	645	5292	504
4976	349	5030	485	5090	551	5183	573	5237	645	5293	504
4977	349	5034	479	5091	551	5184	573	5238	423	5294	504
4978	349	5035	479	5092	553	5185	435	5239	423	5295	504
4979	617	5036	479	5093	553	5186	435	5246	453	5296	504
4981	617	5037	431	5094	553	5187	740	5247	453	5297	505
4982	653	5038	431	5095	553	5188	740	5248	453	5298	505
4983	653	5039	431	5096	547	5189	740	5249	453	5299	505
4984	653	5040	431	5097	547	5190	740	5250	453	5300	505
4987	485	5041	517	5098	547	5191	740	5251	453	5301	505
4988	485	5042	517	5099	547	5192	740	5252	453	5302	505
4989	655	5043	517	5106	555	5196	629	5253	453	5303	505
4990	655	5044	517	5107	555	5197	629	5254	453	5304	505
4991	655	5045	519	5108	465	5198	629	5255	453	5305	505
4992	655	5046	519	5109	465	5199	629	5256	453	5306	505
4993	655	5047	519	5110	461	5200	629	5257	453	5307	505
4994	655	5048	519	5111	461	5201	629	5258	453	5308	505
4995	645	5049	520	5112	649	5202	421	5259	453	5309	419
4996	645	5050	520	5113	649	5203	421	5260	453	5310	419
4997	645	5051	520	5114	547	5204	421	5261	453	5311	419
4998	645	5052	520	5115	547	5205	627	5262	453	5312	419
4999	645	5053	521	5116	547	5206	461	5263	453	5313	421
5000	645	5054	521	5117	547	5207	461	5264	647	5314	421
5001	645	5055	521	5118	549	5208	459	5265	647	5315	421
5002	645	5056	521	5119	549	5209	459	5266	647	5316	421

5317	411
5319	411
5325	609
5326	609
5327	609
5328	609
5329	607
5330	607
5331	607
5332	607
5333	635
5334	635
5336	635
5337	635
5339	597
5340	597
5342	597
5343	597
5345	569
5346	569
5348	569
5349	569
5351	569
5352	569
5354	569
5355	569
5357	509
5358	509
5360	509
5361	509
5363	427
5364	427
5366	427
5367	427
5369	429
5370	429
5372	429
5373	429
5375	429
5376	429
5378	429
5379	429
5381	637
5382	637
5383	637
5384	449
5385	449
5386	449
5387	449
5388	449
5389	449
5390	449
5391	449
5392	445
5393	445
5394	445
5395	445
5396	447
5397	447
5398	447
5399	447
5400	443
5401	443
5402	443
5403	443
5404	443
5405	443
5406	441
5407	441
5408	441
5409	441
5410	441
5411	441
5412	441
5413	441
5414	441
5415	441
5416	441
5417	441
5419	657
5420	657
5421	657
5422	657
5423	657
5424	657
5425	441
5426	441
5431	437
5432	437
5441	437
5442	437
5558	410
5559	410
5560	641
5561	641
5562	643
5563	643
5564	641
5565	641
5566	643
5567	643
5568	697
5569	697
5570	697
5571	697
5572	721
5573	721
5574	487
5575	487
5576	663
5577	663
5578	393
5579	393
5580	393
5581	393
5582	393
5583	393
5584	393
5585	393
5586	393
5587	393
5588	393
5589	393
5590	393
5591	393
5592	393
5593	393
5594	393
5595	393
5596	393
5597	393
5598	393
5599	393
5600	393
5601	393
5602	393
5603	393
5604	393
5605	393
5606	393
5607	393
5608	393
5609	393
5610	393
5611	393
5612	393
5613	393
5614	393
5615	393
5616	405
5617	405
5618	405
5619	405
5620	405
5621	405
5622	405
5623	405
5624	405
5625	405
5626	405
5627	405
5628	395
5629	395
5630	395
5631	395
5632	395
5633	395
5634	395
5635	395
5636	397
5637	397
5638	397
5639	397
5640	399
5641	399
5642	399
5643	399
5644	399
5645	399
5646	399
5647	399
5648	403
5649	403
5650	403
5651	403
5652	403
5653	403
5654	403
5655	403
5656	401
5657	401
5658	401
5659	401
5660	401
5661	401
5662	401
5663	401
5666	631
5667	631
5668	631
5671	703
5672	703
5673	703
5674	673
5676	673
5677	673
5678	665
5679	665
5680	665
5681	665
5682	667
5683	667
5684	659
5685	659
5686	659
5687	659
5688	659
5689	659
5690	659
5691	659
5692	659
5693	667
5694	667
5698	691
5699	691
5700	691
5701	709
5702	691
5703	691
5704	691
5706	569
5707	569
5708	569
5709	569
5710	569
5711	569
5712	569
5713	569
5714	427
5715	427
5716	427
5717	427
5718	481
5719	481
5729	684
5730	684
5731	685
5732	685
5733	605
6023	410
6025	410
6721	413
6722	413
7001	545
7002	545
7003	545
7004	545
7005	545
7006	545
7007	543
7008	543
7009	542
7010	542
7011	542
7012	542
7013	542
7014	542
7015	542
7016	542
7017	541
7018	541
7019	541
7020	541
7021	544
7022	544
7023	544
7024	544
10119	204
10121	204
10122	204
10621	204
10622	204
10623	204
11623	202
11633	202
12119	202
12623	202
12633	202
13113	203
13330	203
13480	203
13623	203
13633	203
14119	198
14121	198
14122	198
14330	198
14480	198
14621	198
14622	198

Numerical Index (Code - Page)

14623	198	19621	204	20510	197	22119	212	24408	341	29276	334
14631	198	19622	204	20510	204	22122	212	24440	207	29480	225
14632	198	19623	204	20518	317	22330	212	24508	341	29623	225
14633	198	20049	319	20520	197	22410	340	24609	341	29735	335
15119	189	20066	319	20520	204	22415	340	24621	207	29777	334
15121	189	20120	318	20528	317	22420	340	24622	207	29882	334
15122	189	20125	318	20530	197	22424	340	24623	207	30129	227
15621	189	20130	318	20530	204	22430	340	24631	207	30209	227
15622	189	20135	319	20540	197	22432	340	24632	207	30270	257
15623	189	20140	319	20540	204	22435	340	24633	207	30300	257
15631	189	20145	319	20625	318	22460	340	24710	195	30400	257
15632	189	20150	319	20625	319	22490	335	24710	207	31220	244
15633	189	20220	318	20625	319	22499	335	24758	341	31225	244
16119	189	20225	318	20635	318	22570	327	25227	305	31227	244
16121	189	20230	318	20635	319	22571	327	25247	305	31270	244
16122	189	20235	319	20635	319	22571	392	25267	305	31275	244
16621	189	20240	319	20700	197	22573	327	25277	305	31277	244
16622	189	20245	319	20710	197	22575	327	25307	305	31300	244
16623	189	20249	319	20710	204	22622	212	25367	305	31305	244
16631	189	20250	319	20718	317	22623	212	25407	305	31307	244
16632	189	20266	319	20720	195	22699	327	25450	305	31400	244
16633	189	20274	242	20720	197	22699	392	25467	305	31405	244
17119	190	20304	242	20720	204	22726	337	25530	222	31407	244
17121	190	20330	189	20728	317	22799	337	25530	305	31709	318
17122	190	20330	190	20730	202	22821	327	25637	305	31809	318
17621	190	20350	189	20738	317	22856	327	25657	305	31909	318
17622	190	20350	190	20750	197	22911	335	25667	305	32131	211
17623	190	20380	189	20772	197	22948	334	25887	222	32299	318
17631	190	20380	190	20811	367	22974	335	25887	305	32440	211
17632	190	20382	189	20818	317	23119	191	25997	305	32499	318
17633	190	20382	190	20825	317	23121	191	26270	243	32621	211
18119	190	20404	242	20828	317	23122	191	26300	243	32625	318
18121	190	20430	190	20833	367	23380	191	26400	243	32625	318
18122	190	20440	189	20838	317	23480	191	27119	217	32631	211
18621	190	20440	190	20855	367	23621	191	27121	217	32635	318
18622	190	20450	189	20865	317	23622	191	27122	217	32635	318
18623	190	20450	190	20877	367	23623	191	27621	217	32699	318
18631	190	20469	189	20915	319	23631	191	27622	217	32899	318
18632	190	20469	190	20917	319	23632	191	27623	217	32900	318
18633	190	20469	212	20925	319	23633	191	27631	217	33119	213
18651	190	20469	213	20927	319	24108	341	27632	217	33121	213
18652	190	20469	216	20991	318	24109	341	27633	217	33122	213
18653	190	20472	189	20997	204	24119	207	28119	223	33440	213
18661	190	20472	190	20999	318	24121	207	28330	223	33621	213
18662	190	20480	202	21119	216	24122	207	28430	223	33622	213
18663	190	20480	202	21121	216	24159	341	28623	223	33623	213
19119	204	20490	204	21621	216	24208	341	28633	223	34121	186
19121	204	20497	212	21623	216	24248	341	29119	225	34277	307
19122	204	20497	216	21631	216	24308	341	29187	334	34307	307
19330	204	20502	204	21633	216	24309	341	29261	335	34407	307

34621	186
34622	186
34623	186
34627	307
34637	307
34720	97
34720	176
34720	186
34720	186
34720	187
34721	97
34721	176
34721	186
34721	186
34721	187
34722	97
34722	176
34722	186
34722	186
34722	187
35119	197
35121	197
35122	197
35311	178
35311	197
35312	197
35330	197
35331	178
35331	197
35332	197
35351	178
35351	197
35352	197
35361	178
35361	197
35362	197
35621	197
35622	197
35623	197
35711	178
35711	197
35712	197
35731	178
35731	197
35732	197
35751	178
35751	197
35752	197
35761	178
35761	197
35762	197
36330	274
37121	205
37270	265
37300	265
37400	265
37480	205
37621	205
38119	197
38121	197
38122	197
38621	197
38622	197
38623	197
39122	222
39430	222
39440	222
39450	222
39622	222
39720	222
40111	373
40171	177
40172	177
40173	177
40191	177
40192	177
40193	177
40201	177
40202	177
40209	177
40220	176
40339	176
40410	176
40420	176
40430	176
40481	176
40482	176
40483	176
40490	176
40491	176
40492	176
40510	175
40520	175
40531	175
40532	175
40541	176
40542	176
40543	176
40550	176
40555	186
40581	176
40582	176
40583	176
40591	176
40592	176
40593	176
40610	176
40631	176
40632	176
40634	176
40635	176
40666	176
40669	176
40721	176
40722	176
40723	176
40731	176
40732	176
40733	176
40741	176
40742	176
40743	176
40751	176
40752	176
40753	176
40770	176
40780	176
40790	176
40795	176
40807	339
40810	176
40831	176
40832	176
40833	176
40851	176
40851	176
40852	176
40852	176
40853	176
40853	176
40881	176
40882	176
40883	176
40901	177
40902	177
40909	177
40931	176
40932	176
40933	176
40990	176
40991	176
40992	176
40993	176
40999	176
41121	187
41122	187
41270	249
41275	249
41300	249
41305	249
41330	187
41400	249
41405	249
41440	187
41450	187
41472	187
41600	249
41605	249
41621	187
41622	187
41780	187
41781	187
41782	187
42360	277
42365	277
43119	194
43121	194
43122	194
43330	194
43430	282
43440	194
43530	194
43621	194
43622	194
43623	194
43631	194
43632	194
43633	194
44110	271
44270	271
44370	271
44500	271
45220	289
45227	289
45310	289
45317	289
45520	289
45527	289
46460	281
46465	281
47430	288
47437	288
47440	288
47447	288
48220	235
48225	235
48270	235
48275	235
48300	235
48305	235
48400	235
48405	235
49270	263
49300	263
49400	263
49600	263
50460	283
51270	259
51277	259
51300	259
51307	259
51400	259
51407	259
51600	259
51607	259
52270	247
52277	247
52300	247
52307	247
52400	247
52407	247
52600	247
52607	247
53119	191
53121	191
53122	191
53621	191
53622	191
53623	191
53631	191
53632	191
53633	191
54460	279
54467	279
55270	264
55300	264
55400	264
56270	256
56300	256
56360	256
56400	256
57001	331
57121	186
57241	329
57242	329
57299	329
57400	331
57452	331
57461	331
57588	330
57621	186
57622	186
57623	186
57661	329
57662	331
57666	331
57881	331
57882	331
57924	330
59016	332
59020	333
59032	332
59050	333
59064	332
59112	329
59121	329
59122	329
59141	329
59142	329
59182	328
59189	328
59216	332
59232	332
59249	330
59264	332
59289	331
59475	329
59519	330
59549	330
59629	330
59682	328
59689	328
59733	330
59739	330
59769	330
59777	330
59789	330
59808	329
59847	329
59911	333

Numerical Index (Code - Page)

60119	199	65621	219	71477	287	75405	260	84300	239	85894	337
60121	199	65622	219	71621	198	75440	195	84305	239	85894	392
60122	199	65623	219	71622	198	75621	195	84400	239	85990	326
60330	199	67122	221	71623	198	75622	195	84405	239	85993	343
60440	199	67440	221	71631	198	75623	195	84431	326	85995	326
60460	285	67452	221	71632	198	76300	253	84431	337	85999	343
60621	199	68121	211	71633	198	76400	253	84431	337	86019	336
60622	199	68122	211	72277	313	77019	336	84431	392	86277	267
60623	199	68270	250	72307	313	77119	315	84432	326	86307	267
60631	199	68300	250	72407	313	77277	309	84432	337	86467	267
60632	199	68400	250	72437	313	77307	309	84432	337	87029	336
60633	199	68450	211	72637	313	77330	315	84432	392	87119	193
61270	252	68502	211	73119	226	77350	313	84600	239	87122	193
61275	252	68510	211	73121	226	77350	315	84605	239	87330	193
61300	252	68520	211	73122	226	77407	309	85120	343	87440	193
61305	252	68621	211	73277	316	77437	309	85144	326	87520	193
61400	252	68622	211	73307	316	77519	313	85144	337	87622	193
61405	252	68631	211	73440	226	77530	313	85144	337	87623	193
61600	252	68632	211	73580	316	77580	309	85144	392	87632	193
61605	252	68997	211	73621	226	77627	309	85183	343	87633	193
62412	340	69119	209	73622	226	77637	309	85190	343	88220	262
62415	340	69220	241	73623	226	77819	309	85220	343	88270	262
62425	340	69225	241	73627	316	77920	313	85244	326	88300	262
62430	340	69270	241	73631	226	77920	315	85263	343	88400	262
62432	340	69275	241	73632	226	77946	313	85290	343	88460	336
62460	340	69300	241	73633	226	77946	315	85330	343	89121	187
62475	340	69305	241	73637	316	77953	309	85332	343	89122	187
63360	273	69400	241	73819	316	77967	309	85336	343	89260	336
63367	273	69405	241	73953	316	77997	309	85360	326	89330	187
64119	307	69440	209	73967	316	79270	251	85364	326	89440	187
64153	341	69600	241	74119	194	79275	251	85396	343	89621	187
64158	341	69605	241	74121	194	79300	251	85420	343	89622	187
64270	234	69623	209	74122	194	79305	251	85444	326	90270	268
64300	234	69633	209	74277	315	79400	251	85460	326	90300	268
64400	234	70119	311	74307	315	79405	251	85470	326	90400	268
64453	341	70277	311	74407	315	79430	336	85475	326	90990	336
64458	341	70307	311	74437	315	80260	336	85544	326	91360	269
64803	341	70330	311	74621	194	81470	275	85626	343	91430	336
64808	341	70350	311	74622	194	81990	336	85696	343	92119	193
65119	219	70407	311	74623	194	82270	245	85732	323	92270	246
65121	219	70437	311	74631	194	82300	245	85753	323	92300	246
65122	219	70627	311	74632	194	82400	245	85769	323	92330	193
65221	219	70637	311	74633	194	82415	327	85876	337	92353	338
65222	219	70967	311	74637	315	82440	327	85884	337	92400	246
65223	219	71119	198	75119	195	82475	327	85890	326	92440	193
65331	219	71121	198	75121	195	82995	336	85890	337	92473	338
65332	219	71122	198	75122	195	83419	336	85890	337	92553	338
65333	219	71330	198	75275	260	83475	336	85890	392	92623	193
65440	219	71440	198	75305	260	84270	239	85894	326	92633	193
65550	219	71470	287	75330	195	84275	239	85894	337	92699	338

92853	338
93153	338
93470	338
93579	338
95119	195
95121	195
95122	195
95179	338
95479	338
95621	195
95622	195
95623	195
95631	195
95632	195
95633	195
96009	338
96307	255
96407	255
96477	255
97220	237
97415	327
98121	215
98122	215
98440	215
98621	215
98622	215
99121	201
99122	201
99440	201
99510	201
99512	201
99520	201
99522	201
99540	201
99542	201
99621	201
99622	201
99721	201
99722	201
198211	351
198212	351
198219	351
198311	351
198312	351
198319	351
199241	351
199242	351
199249	351
199341	351
199342	351
199349	351
205280	493
205284	493
205285	493
206280	493
206284	493
206285	493
222230	493
222238	493
223232	499
223233	499
301182	493
311211	358
311212	358
311241	358
311242	358
311311	358
311312	358
311341	358
311342	358
315011	353
315012	353
316011	353
316012	353
317211	360
317212	360
317242	360
317311	360
317312	360
317341	360
317342	360
412201	97
412202	97
412622	97
412922	97
413633	97
413933	97
414644	97
414944	97
415501	97
415502	97
417701	97
417702	97
419901	97
419902	97
12XXXX	143
130L006	761
130L006-2	762
130L006-2F	762
130L184-5	763
130L184-5F	763
130L195-A	763
130L195-B	763
130L195-C	762
130L195-D	762
13XXXX	153
140026-C3T	766
140026-F4T	766
140L0261L	767
140L026L	767
141123-TC3	766
141123-TC3D	766
141123-TF4	766
141123-TF4D	766
14XXXX	145
171160P30-C	753
171160P38(N)-C	753
17XXXX	155
190S11	350
190S12	350
190S41	350
190S42	350
191S11	350
191S12	350
191S41	350
191S42	350
192S11	354
192S12	354
192S41	354
192S42	354
192S42	355
193S11	354
193S12	354
193S41	354
193S42	354
194S11	355
194S12	355
194S41	355
195S11	355
195S12	355
195S41	355
195S42	355
196S11	357
196S12	357
196S41	357
196S42	357
197S11	357
197S12	357
197S41	357
197S42	357
1XXXXX	149
20469-15	189
20469-15	190
20469-15	212
20469-15	213
20469-15	216
20C90	318
20T90	318
20XXXX	113
25227-1	305
25227-2	305
25657-1	305
25657-2	305
25667-1	305
25667-2	305
257226C	495
258226C	495
25997-1	305
25997-2	305
2XXX1X	167
2XXXXX	45
2XXXXX	79
2XXXXX	121
310S11	359
310S12	359
310S41	359
310S42	359
313S11	352
313S12	352
313S41	352
313S42	352
314S11	352
314S12	352
314S41	352
314S42	352
32275-N	261
32305-N	261
32405-N	261
32605-N	261
32XXXX	107
332PB	317
332RB	317
332RN	317
333RB	317
333RN	317
334RB	317
334RN	317
335RB	317
335RN	317
3371-V2	347

Numerical Index (Code - Page)

33XXXX	133
3432-N	736
3433-N	736
3434-N	736
3435-N	736
3436-N	736
3437-N	736
3474-M	742
3479(N)	746
3480(N)	746
3481(N)	746
3482(N)	746
3483(N)	746
3484(N)	746
3492-N	736
3493-N	736
3494-N	736
3537(N)	744
3538(N)	744
3539(N)	745
3624-V2	347
3654-N	733
3655-N	733
3656-N	733
3916-N	611
3989-V3	363
3990-V3	363
39XX1X	171
3X7XXX	375
3X9XXX	373
3XXXXX	65
4015-V2	734
4016-V2	734
4017-V2	734
4018-V2	734
4019-V2	734
4020-V2	734
4021-V2	734
4022-V2	734
4027-N	680
40XXXX	117
41XX0X	97
4241-N	533
4242-N	533
4332-N	515
4333-N	515
4334-N	513
4335-N	513
4336-N	381
4337-N	381
4338-N	381
4339-N	381
4437-N	361
4438-N	361
4439-N	371
4440-N	371
4449-V3	377
4450-V3	377
4457-D(N)	469
4458-D(N)	469
4459-D(N)	469
4460-D(N)	469
4461-N	563
4462-N	563
4463-N	563
4464-N	563
4499-V2	531
44X9XX	84
4500-V2	529
4645-N	411
4646-N	411
4649-N	411
4650-N	411
4657-N	411
4658-N	411
4679-N	684
4680-N	684
4681-N	684
4682-N	684
4683-N	684
4684-N	684
4685-N	685
4686-N	685
4687-N	685
4688-N	685
4689-N	685
4694-N	685
46XXXX	175
4732-V2	473
4733-V2	473
4734-V2	473
4736-V2	473
4833-N	523
4834-N	523
48XXXX	129
4952-N	563
4953-N	563
4985-N	371
4986-N	371
49XXX2	173
4XXXX8	91
4XXXXX	47
505119DIM-C	748
505143E-C	748
50XXXX	53
51XX1X	81
52101X	81
582L015-C3	765
582L015-C3B	765
582L015-F4	765
582L015-F4B	765
582L016T40E-C3	752
582L016T40E-F	752
58XXXX	125
592063-G12/3	768
592063-G12/4	768
592063-TC	768
592063-TF	768
592072-1	750
5920731-(N2)	750
592074-C(N)	751
592076-C3(N)	751
592122-FL2	743
592122-FL2E	743
592122-FL3	743
592122-FL3E	743
592122R39-2	750
592122R-C3	743
592125R2-C	747
592125R2-C3	747
592125R2-F	747
592125R-C	747
592125R-C3	747
592125R-F	747
592125S-6(N)	745
592125S-6C(N)	745
592125S-6F(N)	745
592125SC-2(N)	745
592125SC-3(N)	745
592125SC-4(N)	745
592141-C3E2	759
592141-E4C3	759
592165SIL-C	754
592165SIL-F	754
592563(N)-4C(N2)	744
592563(N)-4F(N2)	744
5925631(N)-4C(N2)	744
5925631(N)-4F(N2)	744
5925631-4C2(N)	744
592563-4C2(N)	744
592563R1-C2	744
592563R1-C3	744
592563R1-F4	744
592563R-C2	744
592563R-C3	744
592563R-F4	744
5XXXXX	49
5XXXXX	52
5XXXXX	93
61XX0X	75
66470/N	286
66477/N	286
67632-L	221
67632-R	221
6XXX8X	61
6XXXXX	55
6XXXXX	60
6XXXXX	61
6XXXXX	77
6XXXXX	169
71XXXX	115
72627-2	313
72627-4	313
72967-2	313
72967-4	313
72967-L2	313
72967-L4	313
72XXXX	101
74627-2	315
74627-4	315
74967-2	315
74967-4	315
74967-L2	315
74967-L4	315
76XXXX	163
78XXXX	99
79XXXX	119
7X6XXX	367
80XXXX	85
81XX0X	87
86XXXX	151
88XXXX	123
8XXXXX	89
91XXXX	139
92XXXX	141
94XXX2	105
97XX4X	595
9XXX1X	57
9XXXXX	147
CCT-10DA	339

CCT-10TR	339
CCT-20DA	339
CCT-20TR	339
CCT-40DA	339
CCT-40TR	339
CCT-60DA	339
CCT-60TR	339
D-3626	347
D-3627	347
D-3628	347
DM4430	299
DM4437	299
DM5470	301
DM5477	301
DR-H-21W	339
DR-H-42WCAS	333
DR-H42WDA	339
DR-H-43W	339
DXXXXX	41
DXXXXX	43
F1XXXX	557
F2XXXX	557
F3XXXX	557
HRZ-01	167
HRZ-02	167
HRZ-PLE-01	167
HRZ-PLE-02	167
K25183	179
K25189	179
K25411	179
K25412	179
K25431	179
K25432	179
K25619	179
K25639	179
K25731	179
K25732	179
L7XXXX	103
S1XXXX	555
S2XXXX	555
S3XXXX	555
SP1270	291
SP1300	291
SP1400	291
SP2430	293
SP2435	293
SP3470	295
SP3475	295
SP4437	296
SP5470	297
SP-6329	291
SP-9812	291
TP-98-B-3D	215
TP-98-N-3D	215
TR10024	340
TR10024DA	341
TR10024TR	341
TR15024DA	341
TR15024TR	341
TR16024	340
TR3024	340
TR3024DA	341
TR6024	340
TR6024DA	341
TXT-012	177
TXT-03	177
TXT-05	177
TXT-08	177
TXT-09	177
TXT-18	177
TXT-20	177
TXT-24	177
TXT-37	177
UDXXXX	161
UNI-98-B-3D	215
UNI-98-N-3D	215
VXXXXX	127
X3XXXX	71
X5XXXX	95
X8XXXX	73
X9XXXX	69
XXXXX	165
XXXXXX	51
XXXXXX	67
XXXXXX	83
XXXXXX	109
XXXXXX	131
Z11011	178
Z11021	178
Z11031	178
Z11051	178
Z11071	178
Z11511	178
Z11521	178
Z11551	178
Z11571	178
Z12411	178
Z12421	178
Z12431	178
Z12451	178
Z12471	178
Z1XX0X	156
Z1XX0X	157
ZDXXXX	136
ZQ6XXX	135
ZTXXXX	137

Headquarters 1



Headquarters 2



BENEITO FAURE®

Headquarters 1

C/ Thomas Edison, 4-6
Polig. Valldoriolf
08430 La Roca del Vallès
Barcelona (Spain)

Headquarters 2

C/ Nòria, 10
Polig. Valldoriolf
08430 La Roca del Vallès
Barcelona (Spain)

Headquarters 3

C/ Nòria, 15
Polig. Valldoriolf
08430 La Roca del Vallès
Barcelona (Spain)

Headquarters 3



BENEITO FAURE®

FSC
www.fsc.org
MIXTO
Papel | Apoyando la silvicultura responsable
FSC® C166375

BENEITO FAURE®